

EuroSeries® (ESP)

- Die cast aluminium impellers
- Fully speed controllable
- Air Volumes up to 13.89m³/s
- Sizes 250 to 1000 dia protected to IP54
- Operating Temperatures from -40°C up to +70°C Motor
- Insulation Class F
- Thermal overload for motor protection
- Reversible - Supply or Extract
- Tough epoxy paint finish
- Quality Assurance to BS EN ISO 9001:1994
- Performance tested to ISO 5801



The EuroSeries® ESP axial blade plate fans, feature a single shot die cast aluminium blade and external rotor motor design.

The EuroSeries® ESP range is available in eleven sizes with the extract performances up to 13.89m³/s, with pressure characteristics of up to 300Pa. All units are designed for speed controllable.

Impellers

All sizes are supplied with cast aluminium impellers, ensuring performance when working against outdoor conditions and abrasive airflow. Where fans are reversible for Intake a -30% drop in performance can be expected.

Motors

External rotor motors are specially designed and styled for this range of fan. Ball bearings are greased for life. Rotors are dynamically balanced to ISO 1940. Sizes 250-1000mm, motors are protected to IP54, against dust and moisture complying with BS EN 60529:1992. They are ribbed aluminium body castings for efficient cooling. Motor insulation is Class 'F' (from -40°C to +70°C).

Electrical

Single phase 220-240V 50Hz. Capacitor start and run. Three phase 380-415V 50Hz. An IP54 terminal box are supplied with 20mm and PGII entry. All motors are fitted with thermal overload protection which should be wired into all controller circuits and into starter contactors. Models are available with either 2,4,6 or 8 pole motors.

Terminal Box

Terminal Box to IP54 as standard, protected against dust and water from any angle allowing outside applications.

Performance

The fan performance is in accordance with tests to BS848 Part 1 1980.

Sound Levels


Fan sound levels are measured in a reverberant chamber in accordance with BS848 Part 2 1985. Published dB(A) figures are free field sound pressure levels at 3m with spherical propagation at a reference level of 2×10^{-5} Pa (20 micro-Pascal). The sound power level spectra figures are dB with reference level of 10^{-12} Watts (1 pico-watt). To ensure minimum noise levels during speed control, an auto transformer speed control is recommended.

Accessories

A full range of accessories:



- Electronic Speed Controllers
- Auto Transformer Speed Controllers
- D.O.L. Starters & Overloads
- Discharge Guards
- Louvre Shutters

Dimensions (mm)

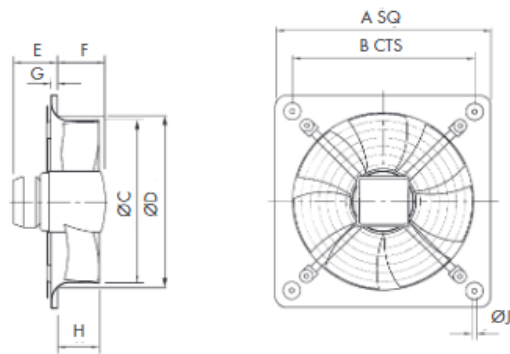

Dia	A	B	ØC	ØD	E	F	G	H	ØJ	Kg
250	370	320	256.5	264.5	84	80	6	80	9	3.4
315	430	380	320	328	84	84	19	70	9	6.3
355	485	435	367	372	86	97	21	75	9	7.3
400	540	490	412	420	93	100	12	88	9	10.2
450	575	535	463	480	86	139	14	96	11	15.8
500	655	615	517	528	84	141	16	104	11	17.3
560	725	675	568	589	81	142.5	16	119	11	24
630	805	750	643	664	82	142.5	20	130	11	45
710	850	810	720	763	37	176.5	20	150	14.5	31
800	970	910	804	869	34	244	17	193	14.5	38
1000	1170	1110	1009	1067	40	284	20	200	14.5	84

Performance Guide

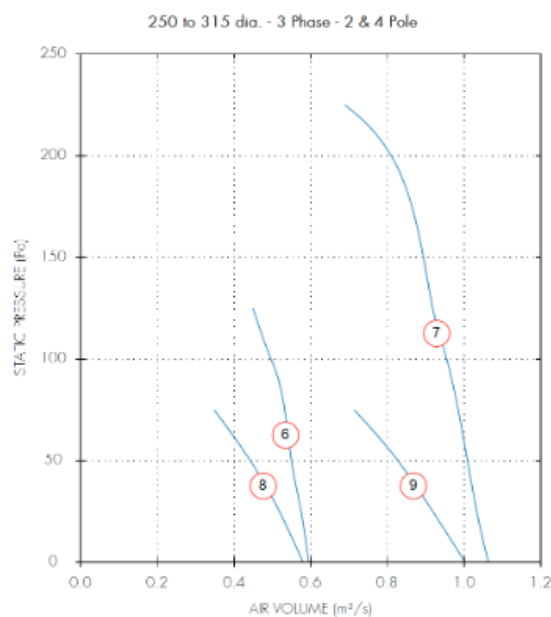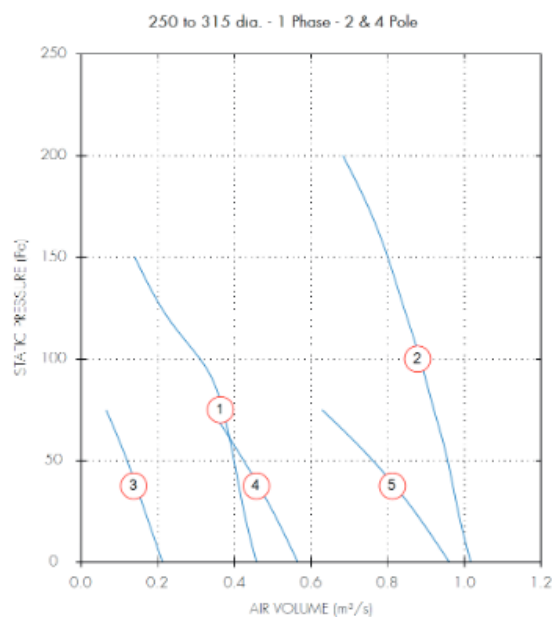



Dia.	Motor Phase	Stock Ref	Poles	r.p.m	IP Rating	Curve Ref.	0	m³/s @ Pa				Motor kW	S.C. Amps	F.L.C. Amps	dB(A) @ 3m
250	1	ESP25012	2	2440	IP44	1	0.46	0.4	0.31	0.14		0.12	1.15	0.54	59
315	1	ESP31512	2	2690	IP54	2	1.02	0.96	0.88	0.8	0.68	0.56	7.2	2.4	64
250	1	ESP25014	4	1340	IP44	3	0.21	0.12				0.04	0.3	0.16	44
315	1	ESP31514	4	1300	IP54	4	0.57	0.42				0.15	1.38	0.7	50
355	1	ESP35514	4	1330	IP54	5	0.96	0.76				0.19	1.45	0.84	53
250	3	ESP25032	2	2700	IP44	6	0.59	0.55	0.5			0.2	3.5	0.87	61
315	3	ESP31532	2	2800	IP54	7	1.06	1.01	0.95	0.89	0.81	0.48	5	0.9	60
315	3	ESP31534	4	1390	IP54	8	0.58	0.44				0.11	2.1	0.27	46
355	3	ESP35534	4	1370	IP54	9	1	0.83				0.17	1.35	0.37	49

For fans wired to reverse run, duty reduced by 30%. ESP25012, ESP31512 and ESP25014 not suitable for reverse airflow.

Sound Power Level Spectra dB (ref 10⁻¹² Watts)

Dia.	Motor Phase	Stock Ref	Poles	Spectrum	63	125	250	500	1k	2k	4k	8k	dB(A) @ 3m
250	1	ESP25012	2	Inlet	69	70	76	76	70	70	67	59	57
250	1	ESP25012	2	Outlet	69	70	76	76	70	70	67	59	57
315	1	ESP31512	2	Inlet	69	73	79	74	74	76	73	66	61
315	1	ESP31512	2	Outlet	69	73	79	74	74	76	73	66	61
250	1	ESP25014	4	Inlet	70	72	63	58	54	52	45	35	41
250	1	ESP25014	4	Outlet	70	72	63	58	54	52	45	35	41
315	1	ESP31514	4	Inlet	70	68	66	61	60	62	58	51	47
315	1	ESP31514	4	Outlet	70	68	66	61	60	62	58	51	47
355	1	ESP35514	4	Inlet	65	70	67	65	64	64	62	55	50
355	1	ESP35514	4	Outlet	65	70	67	65	64	64	62	55	50
250	3	ESP25032	2	Inlet	7	64	76	80	74	70	66	60	59
250	3	ESP25032	2	Outlet	7	64	76	80	74	70	66	60	59
315	3	ESP31532	2	Inlet	71	72	83	80	78	79	75	67	64
315	3	ESP31532	2	Outlet	71	72	83	80	78	79	75	67	64
315	3	ESP31534	4	Inlet	64	67	69	63	62	60	58	53	47
315	3	ESP31534	4	Outlet	64	67	69	63	62	60	58	53	47
355	3	ESP35534	4	Inlet	58	73	63	64	64	65	64	58	50
355	3	ESP35534	4	Outlet	58	73	63	64	64	65	64	58	50

Performance Guide

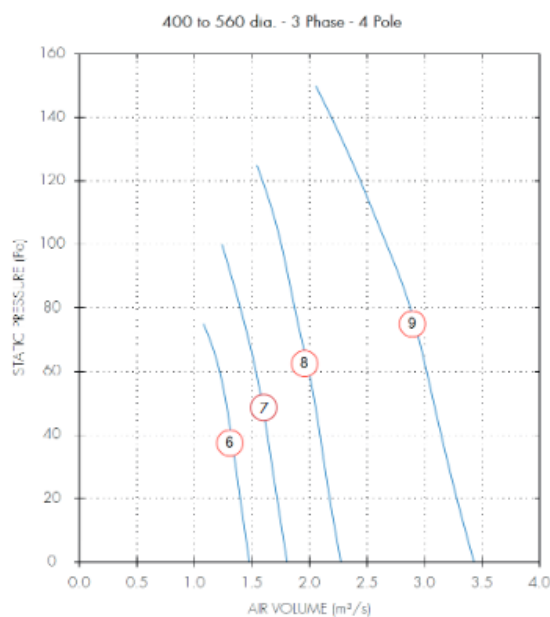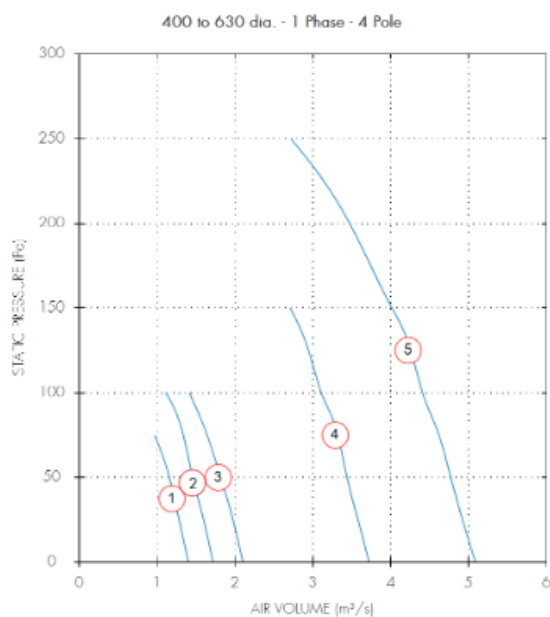

Dia.	Motor Phase	Stock Ref	Poles	r.p.m	IP Rating	Curve Ref.	0	50	m³/s @ Pa					Motor kW	S.C. Amps	F.L.C. Amps	dB(A) @ 3m
400	1	ESP40014	4	1350	IP54	1	1.4	1.16						0.29	2.4	1.45	56
450	1	ESP45014	4	1370	IP54	2	1.72	1.46	1.11					0.36	3.6	1.6	61
500	1	ESP50014	4	1290	IP54	3	2.1	1.82	1.41					0.51	4.3	2.3	55
560	1	ESP56014	4	1320	IP54	4	3.72	3.44	3.11	2.71				1.35	9.3	6	63
630	1	ESP63014	4	1320	IP54	5	5.09	4.77	4.41	4.02	3.47	2.72		2.2	28	9.9	70
400	3	ESP40034	4	1350	IP54	6	1.48	1.27						0.26	2.1	0.56	51
450	3	ESP45034	4	1380	IP54	7	1.8	1.59	1.24					0.36	2.6	0.8	56
500	3	ESP50034	4	1380	IP54	8	2.27	2.05	1.75					0.55	4.2	1.05	58
560	3	ESP56034	4	1220	IP54	9	3.43	3.08	2.67	2.05				1.25	7.7	2.2	70

For fans wired to reverse run, duty reduced by 30%.

Sound Power Level Spectra dB (ref 10⁻¹² Watts)

Dia.	Motor Phase	Stock Ref	Poles	Spectrum	63	125	250	500	1k	2k	4k	8k	dB(A) @ 3m
400	1	ESP40014	4	Inlet	70	72	67	66	65	65	64	56	51
400	1	ESP40014	4	Outlet	70	72	67	66	65	65	64	56	51
450	1	ESP45014	4	Inlet	69	76	73	72	70	71	70	62	57
450	1	ESP45014	4	Outlet	69	76	73	72	70	71	70	62	57
500	1	ESP50014	4	Inlet	65	75	69	70	70	71	69	62	56
500	1	ESP50014	4	Outlet	65	75	69	70	70	71	69	62	56
630	1	ESP63014	4	Inlet	82	86	79	79	80	78	75	70	64
630	1	ESP63014	4	Outlet	82	86	79	79	80	78	75	70	64
400	3	ESP40034	4	Inlet	62	73	65	65	67	69	67	60	53
400	3	ESP40034	4	Outlet	62	73	65	65	67	69	67	60	53
450	3	ESP45034	4	Inlet	65	82	75	76	73	72	69	62	58
450	3	ESP45034	4	Outlet	65	82	75	76	73	72	69	62	58
500	3	ESP50034	4	Inlet	67	71	69	72	70	71	68	61	56
500	3	ESP50034	4	Outlet	67	71	69	72	70	71	68	61	56
560	3	ESP56034	4	Inlet	85	79	77	76	76	75	72	66	61
560	3	ESP56034	4	Outlet	85	79	77	76	76	75	72	66	61