

AW 500E4 sileo Axial fan

Item Number: [37412](#)

Variant: 230V 1~ 50Hz - D (Delta)

Speed controllable by voltage reduction, plus option of 2-step operation by D/Y switching for 400V versions.

Inlet protection guard.

Safe and maintenance free operation.

Can be installed in any mounting position.

Electric connection via terminal box mounted on the motor.

Single phase fans are supplied with capacitor.

Axial fans of the AW sileo range do have a bionic shape of the fan blade, and are driven by external rotor motors. The AW range is equipped with a square wall plate, galvanized steel and powder coated in black (RAL9005). The protection guard at the inlet side is powder coated in black. The axial impeller is manufactured from pressure die cast aluminum and also painted in black (RAL9005). The impeller is balanced dynamically in two levels in accordance with DIN ISO 1940 part 1, quality G6.3.

The motors are equipped with thermal contacts for motor protection, with leads to be connected to a motor protection unit.



Technical parameters

Norminal data		
Voltage (nominal)	230	V
Frequency	50	Hz
Phase(s)	1~	
Motor circuit connection	D	
Input power	720	W
Input current	3.2	A
Impeller speed	1,240	r.p.m.
Air flow	max 8,878	m³/h
Air flow at max. efficiency	5,735	m³/h
Specific ratio	1,000000	
Capacitance of capacitor	16	µF
Temperature of transported air	max 70	°C
Max temperature of transported air, when speed controlled	70	°C
Sound data		
Sound pressure level at 1m	66	dB(A)
Protection/Classification		
Enclosure class, motor	IP54	
Insulation class	F	
Data according to ErP		
ErP ready	ErP 2018	
Measurement category	A	
Efficiency grade	40.3	η _{actual}
Efficiency, static	32.9	η _{statA}
Target efficiency grade ErP2013	36	η _{target2013}
Target efficiency grade ErP2015	40	η _{target2015}

Dimensions and weights


Weight	20 kg
--------	-------

Others

Color name, casing	Black
--------------------	-------

Motor type	AC
------------	----


Performance curve

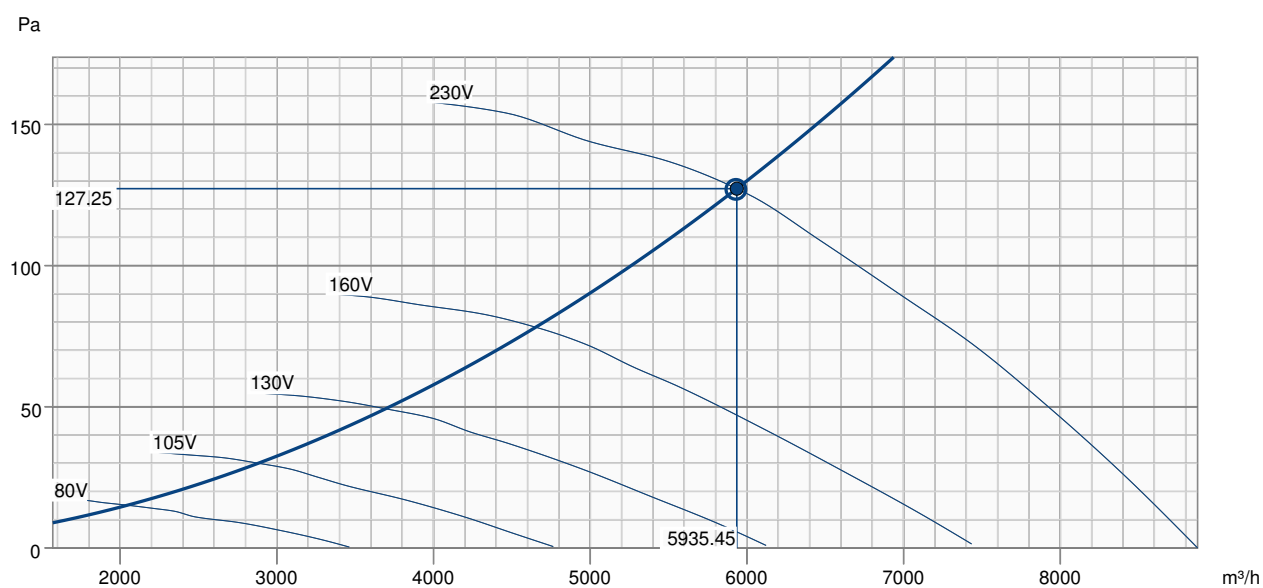

Hydraulic data	
Required air flow	5929 m³/h
Required static pressure	127 Pa
Working air flow	5935 m³/h
Working static pressure	127 Pa
Air density	1.204 kg/m³
Power	694.0 W
Fan control - RPM	1258 rpm
Current	3.06 A
SFP	0.421 kW/m³/s
Control voltage	230.0 V
Supply voltage	230 V


Sound power level		63	125	250	500	1k	2k	4k	8k	Total
Inlet	dB(A)	19	35	45	54	60	60	56	48	64
Outlet	dB(A)	18	36	47	54	59	60	56	49	64

Dimension

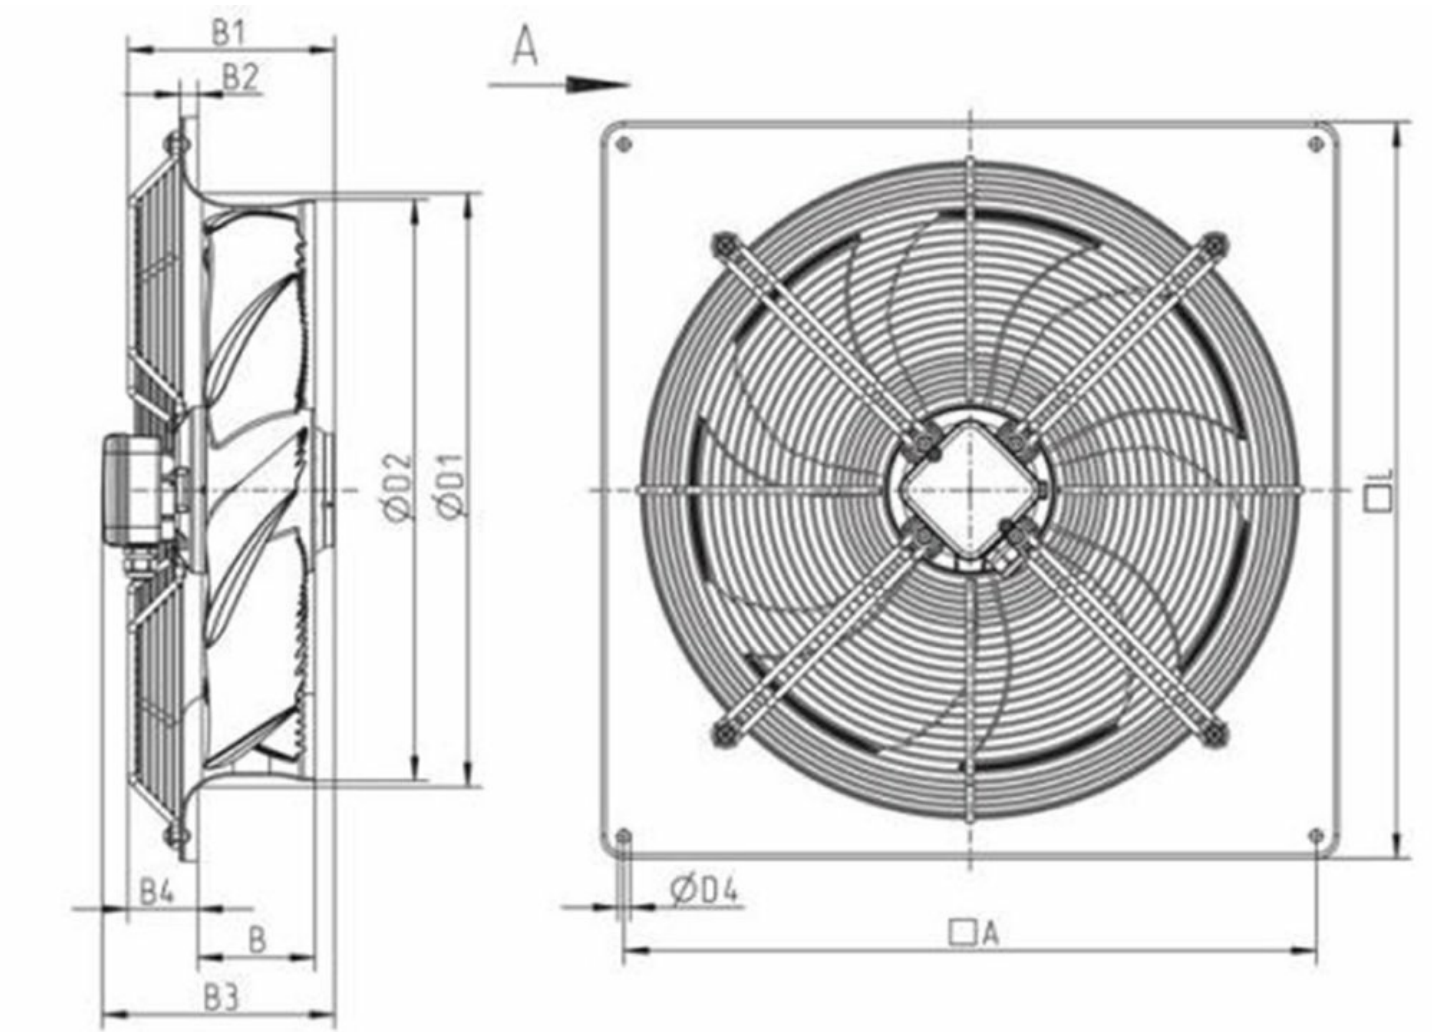

	□A	B	B1	B2	B3	B4	ØD1	ØD2	ØD4	□L
AW 500	615	104	204	16	226	62	531	517	11	655

Wiring

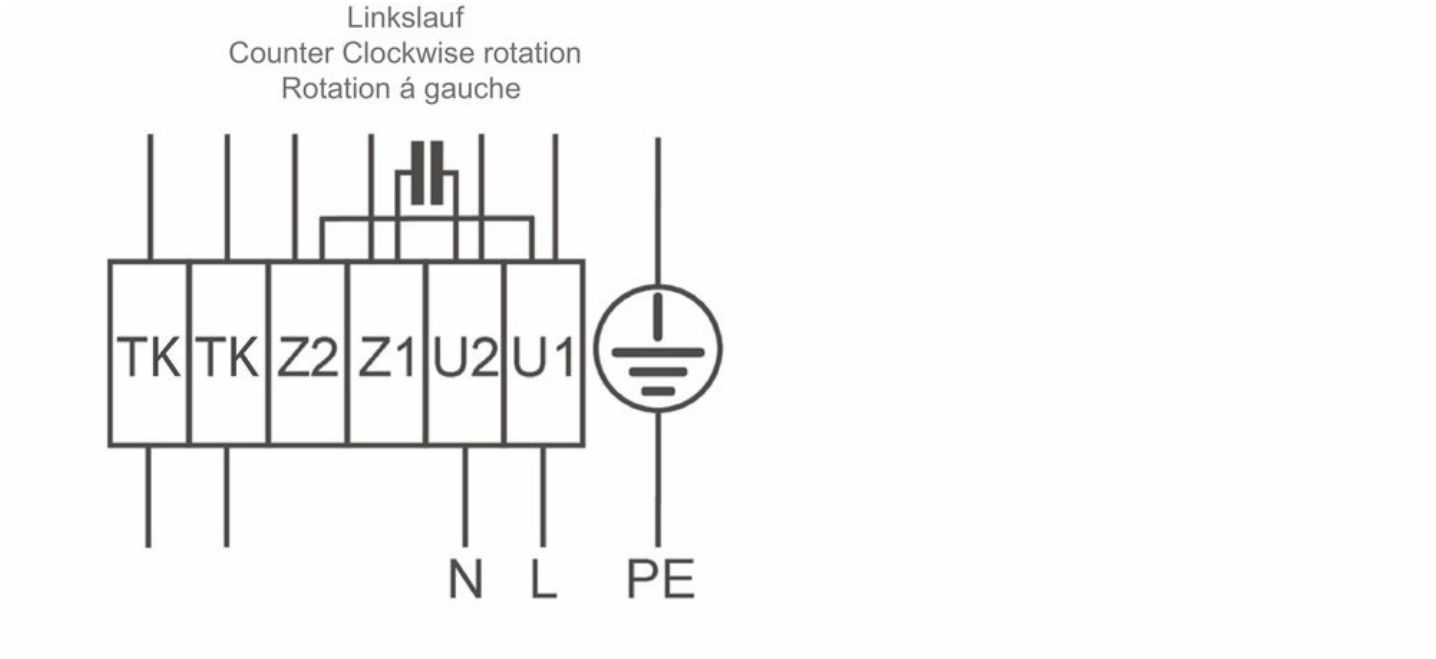

Ecodesign 327

Manufacturer	Systemair GmbH, Seehöfer Str. 45, DE-97944 Boxberg, Amtsgericht (court of registration) Mannheim, HRB 560437	
Type	AW 500E4	
Year of manufacture	See name plate of the fan	
Air flow qv	5,735	m³/h
Efficiency category	static	
Efficiency grade N	40.3	
Efficiency grade target N	40	
Speed (rpm) n	1,253	r.p.m.
Pressure increase total psf	134	Pa
Power consumption Ped	700	W
Overall efficiency	32.9	%
Variable speed drive	No	
Additional components	Components used to calculate the energy efficiency that are not apparent from the measurement category are detailed in the CE declaration.	
Maintenance	Information on installation, operation and mainenance is provided in the operating instructions.	
Recycling / disposal	Information on recycling and disposal is provided in the operating instructions.	

Accessories

- [REE 4 Speed control \(5317\)](#)
- [REU 5 Speed control \(5006\)](#)
- [REV-5POL/05 ON/OFF \(33979\)](#)
- [RTRE 5 Speed control \(5010\)](#)
- [SG AW-D BGr 050, RAL 9005 \(30603\)](#)

Documents

- [L-BAL-001-SYSTEMAIR.PDF](#)
- [EU_DECLARATION_OF_CONFORMITY_AXIAL_FANS_EN_003.PDF](#)
- [installation variations_1_AR_AW.pdf](#)

Specification

Axial fans of the AW sileo range do have a bionic shape of the fan blade, and are driven by external rotor motors. The AW range is equipped with a square wall plate, galvanized steel and powder coated in black (RAL9005). The protection guard at the inlet side is powder coated in black. The axial impeller is manufactured from pressure die cast aluminum and is powder coated in black. The impeller is balanced dynamically in two levels in accordance with DIN ISO 1940 part 1, quality G6.3. The motors are equipped with thermal contacts for motor protection, with leads to be connected to a motor protection unit, for example Systemair unit S-ET.