

AW 560E4 sileo Axial fan

Item Number: [37413](#)

Variant: 230V 1~ 50Hz - D (Delta)

Speed controllable by voltage reduction, plus option of 2-step operation by D/Y switching for 400V versions.

Inlet protection guard.

Safe and maintenance free operation.

Can be installed in any mounting position.

Electric connection via terminal box mounted on the motor.

Single phase fans are supplied with capacitor.

Axial fans of the AW sileo range do have a bionic shape of the fan blade, and are driven by external rotor motors. The AW range is equipped with a square wall plate, galvanized steel and powder coated in black (RAL9005). The protection guard at the inlet side is powder coated in black. The axial impeller is manufactured from pressure die cast aluminum and also painted in black (RAL9005). The impeller is balanced dynamically in two levels in accordance with DIN ISO 1940 part 1, quality G6.3.

The motors are equipped with thermal contacts for motor protection, with leads to be connected to a motor protection unit.



Technical parameters

Nominal data		
Voltage (nominal)	230	V
Frequency	50	Hz
Phase(s)	1~	
Motor circuit connection	D	
Input power	1,150	W
Input current	5.6	A
Impeller speed	1,420 r.p.m.	
Air flow	max 11,930 m³/h	
Air flow at max. efficiency	8,222 m³/h	
Specific ratio	1,000000	
Capacitance of capacitor	25 µF	
Temperature of transported air	max 70 °C	
Max temperature of transported air, when speed controlled	70 °C	
Sound data		
Sound pressure level at 1m	76 dB(A)	
Protection/Classification		
Enclosure class, motor	IP54	
Insulation class	F	
Data according to ErP		
ErP ready	ErP 2018	
Measurement category	A	
Efficiency grade	41.8	ηactual
Efficiency, static	35.8	ηstatA
Target efficiency grade ErP2013	36	ηtarget2013
Target efficiency grade ErP2015	40	ηtarget2015

Dimensions and weights


Weight	31.7	kg
--------	------	----

Others

Motor type	AC
------------	----

Performance curve

Pa

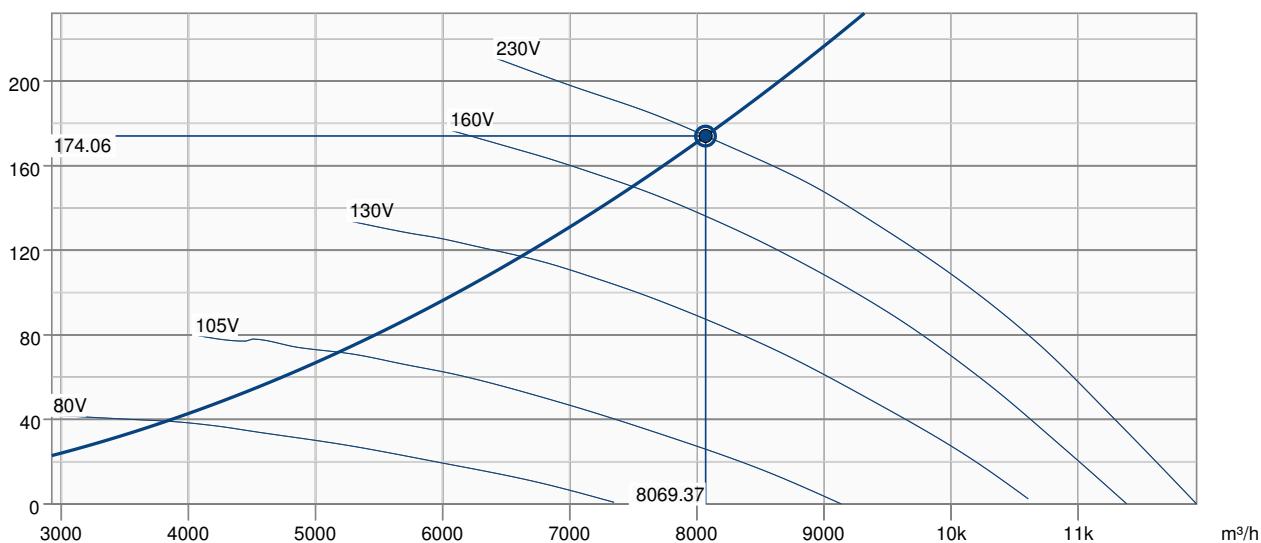


Hydraulic data

Required air flow	8068 m ³ /h
Required static pressure	174 Pa
Working air flow	8069 m ³ /h
Working static pressure	174 Pa
Air density	1.204 kg/m ³
Power	1117.3 W
Fan control - RPM	1428 rpm
Current	5.36 A
SFP	0.498 kW/m ³ /s
Control voltage	230.0 V
Supply voltage	230 V

Sound power level	63	125	250	500	1k	2k	4k	8k	Total	
Inlet	dB(A)	27	47	61	71	79	81	77	68	85
Outlet	dB(A)	26	47	60	71	79	82	78	70	85


Dimension

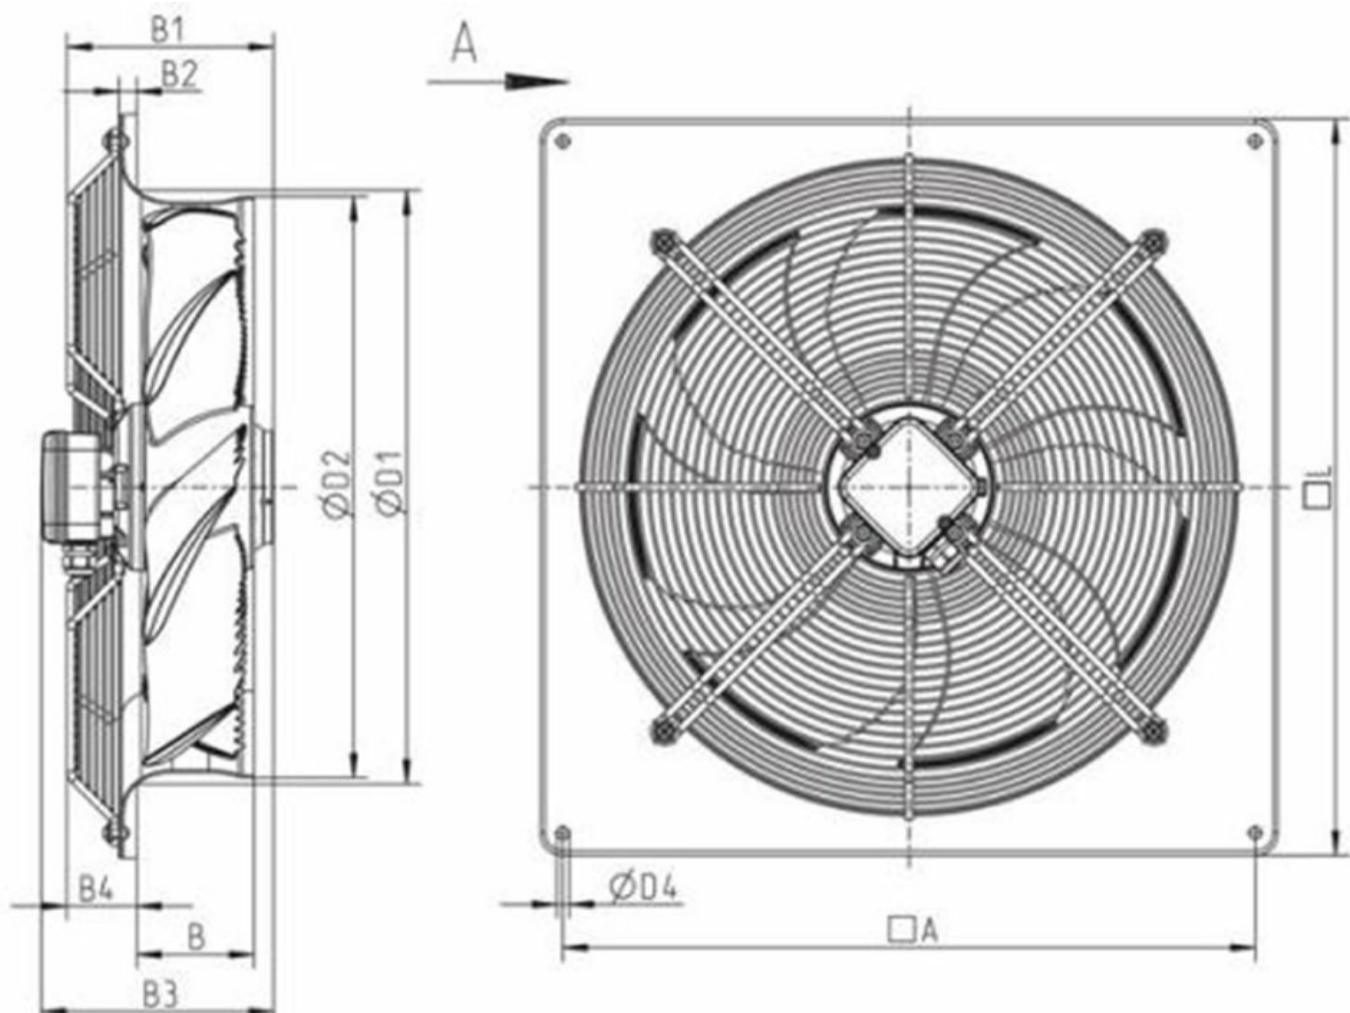

	□A	B	B1	B2	B3	B4	ØD1	ØD2	ØD4	□L
AW 560DV	675	119	223	16	245	60	589	568	11	725
AW 560E4	675	119	243	16	266	75	589	568	11	725

Wiring

Linkslauf
Counter Clockwise rotation
Rotation à gauche

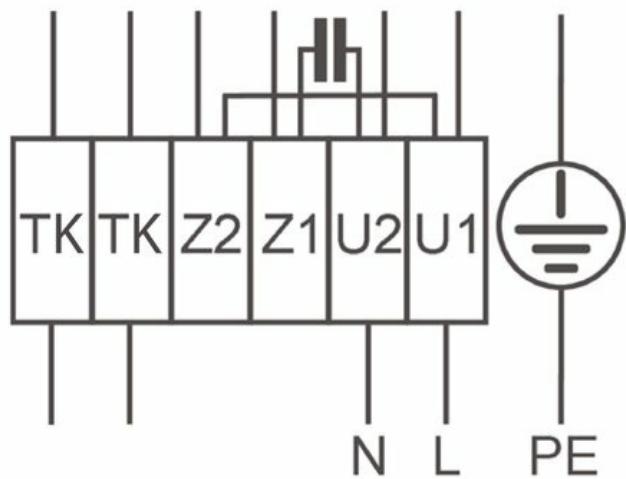

Ecodesign

Ecodesign 327

Manufacturer	Systemair GmbH, Seehöfer Str. 45, DE-97944 Boxberg, Amtsgericht (court of registration) Mannheim, HRB 560437	
Type	AW 560E4	
Year of manufacture	See name plate of the fan	
Air flow qv	8,222	m ³ /h
Efficiency category	static	
Efficiency grade N	41.8	
Efficiency grade target N	40	
Speed (rpm) n	1,428 r.p.m.	
Pressure increase total psf	170 Pa	
Power consumption Ped	1,110 W	
Overall efficiency	35.8 %	
Variable speed drive	No	
Additional components	Components used to calculate the energy efficiency that are not apparent from the measurement category are detailed in the CE declaration.	
Maintenance	Information on installation, operation and mainenance is provided in the operating instructions.	
Recycling / disposal	Information on recycling and disposal is provided in the operating instructions.	

Accessories

- REV-5POL/05 ON/OFF (33979)
- RTRE 12 Speed control (6133)
- SG AW-D BGr 056, RAL 9005 (30604)

Documents

- [L-BAL-001-SYSTEMAIR.PDF](#)
- [EU_DECLARATION_OF_CONFORMITY_AXIAL_FANS_EN_003.PDF](#)
- [installation_variations_1_AR_AW.pdf](#)

Specification

Axial fans of the AW silo range do have a bionic shape of the fan blade, and are driven by external rotor motors. The AW range is equipped with a square wall plate, galvanized steel and powder coated in black (RAL9005). The protection guard at the inlet side is powder coated in black. The axial impeller is manufactured from pressure die cast aluminum and is powder coated in black. The impeller is balanced dynamically in two levels in accordance with DIN ISO 1940 part 1, quality G6.3. The motors are equipped with thermal contacts for motor protection, with leads to be connected to a motor protection unit, for example Systemair unit S-ET.