

AW 630DV sileo Axial fan

Item Number: 37415

Variant: 400V 3~ 50Hz

Speed controllable by voltage reduction, plus option of 2-step operation by D/Y switching for 400V versions.

Inlet protection guard.

Safe and maintenance free operation.

Can be installed in any mounting position.

Electric connection via terminal box mounted on the motor.

Single phase fans are supplied with capacitor.

Axial fans of the AW sileo range do have a bionic shape of the fan blade, and are driven by external rotor motors. The AW range is equipped with a square wall plate, galvanized steel and powder coated in black (RAL9005). The protection guard at the inlet side is powder coated in black. The axial impeller is manufactured from pressure die cast aluminum and also painted in black (RAL9005). The impeller is balanced dynamically in two levels in accordance with DIN ISO 1940 part 1, quality G6.3.

The motors are equipped with thermal contacts for motor protection, with leads to be connected to a motor protection unit.

The impeller is balanced dynamically in two levels in accordance with DIN ISO 1940 part 1, quality G6.3.

The motors are equipped with thermal contacts for motor protection, with leads to be connected to a motor protection unit.



Technical parameters

Nominal data		
Voltage (nominal)	400	V
Frequency	50	Hz
Phase(s)	3~	
Motor circuit connection	D; Y	
Input power	1,950	W
Input current	3.4	A
Impeller speed	1,350	r.p.m.
Air flow	max 15,926	m³/h
Air flow at max. efficiency	11,365	m³/h
Specific ratio	1,000000	
Temperature of transported air	max 60	°C
Max temperature of transported air, when speed controlled	60	°C
Sound data		
Sound pressure level at 1m	78	dB(A)
Protection/Classification		
Enclosure class, motor	IP54	
Insulation class	F	
Data according to ErP		
ErP ready	ErP 2018	
Measurement category	A	
Efficiency grade	45.5	η_{actual}
Efficiency, static	40.7	η_{statA}
Target efficiency grade ErP2013	36	$\eta_{target2013}$
Target efficiency grade ErP2015	40	$\eta_{target2015}$


Dimensions and weights

Weight 34.2 kg

Others

Motor type AC


Performance curve

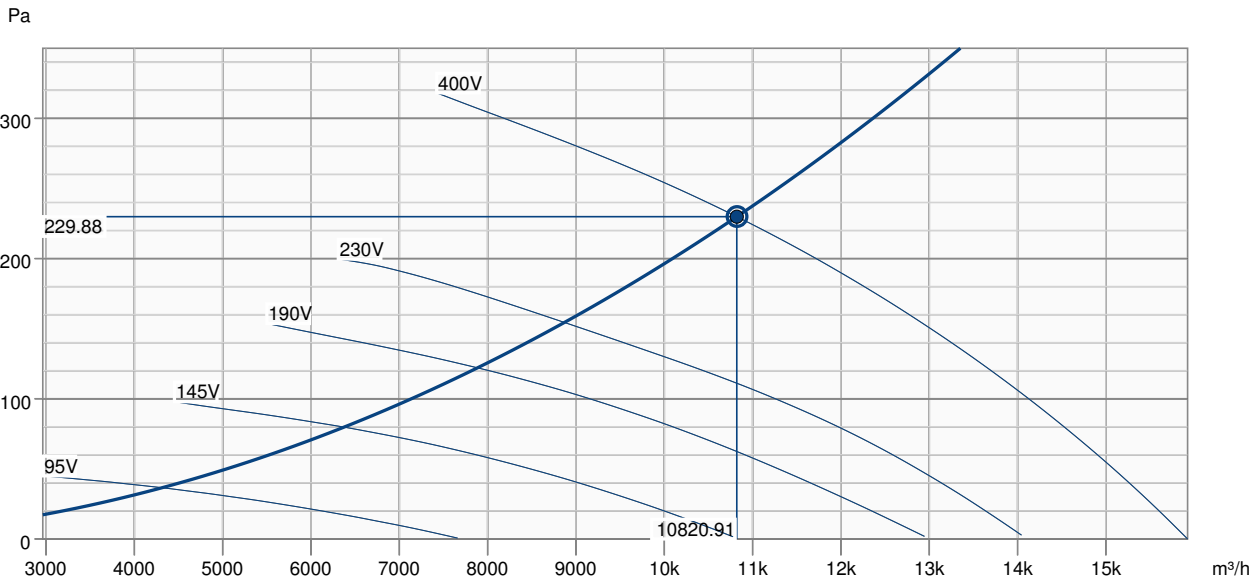

Hydraulic data	
Required air flow	10824 m³/h
Required static pressure	230 Pa
Working air flow	10821 m³/h
Working static pressure	230 Pa
Air density	1.204 kg/m³
Power	1725.4 W
Fan control - RPM	1373 rpm
Current	3.12 A
SFP	0.574 kW/m³/s
Control voltage	400.0 V
Supply voltage	400 V


Sound power level		63	125	250	500	1k	2k	4k	8k	Total
Inlet	dB(A)	28	47	58	70	79	81	78	68	85
Outlet	dB(A)	28	49	60	70	78	80	77	68	84

Dimension

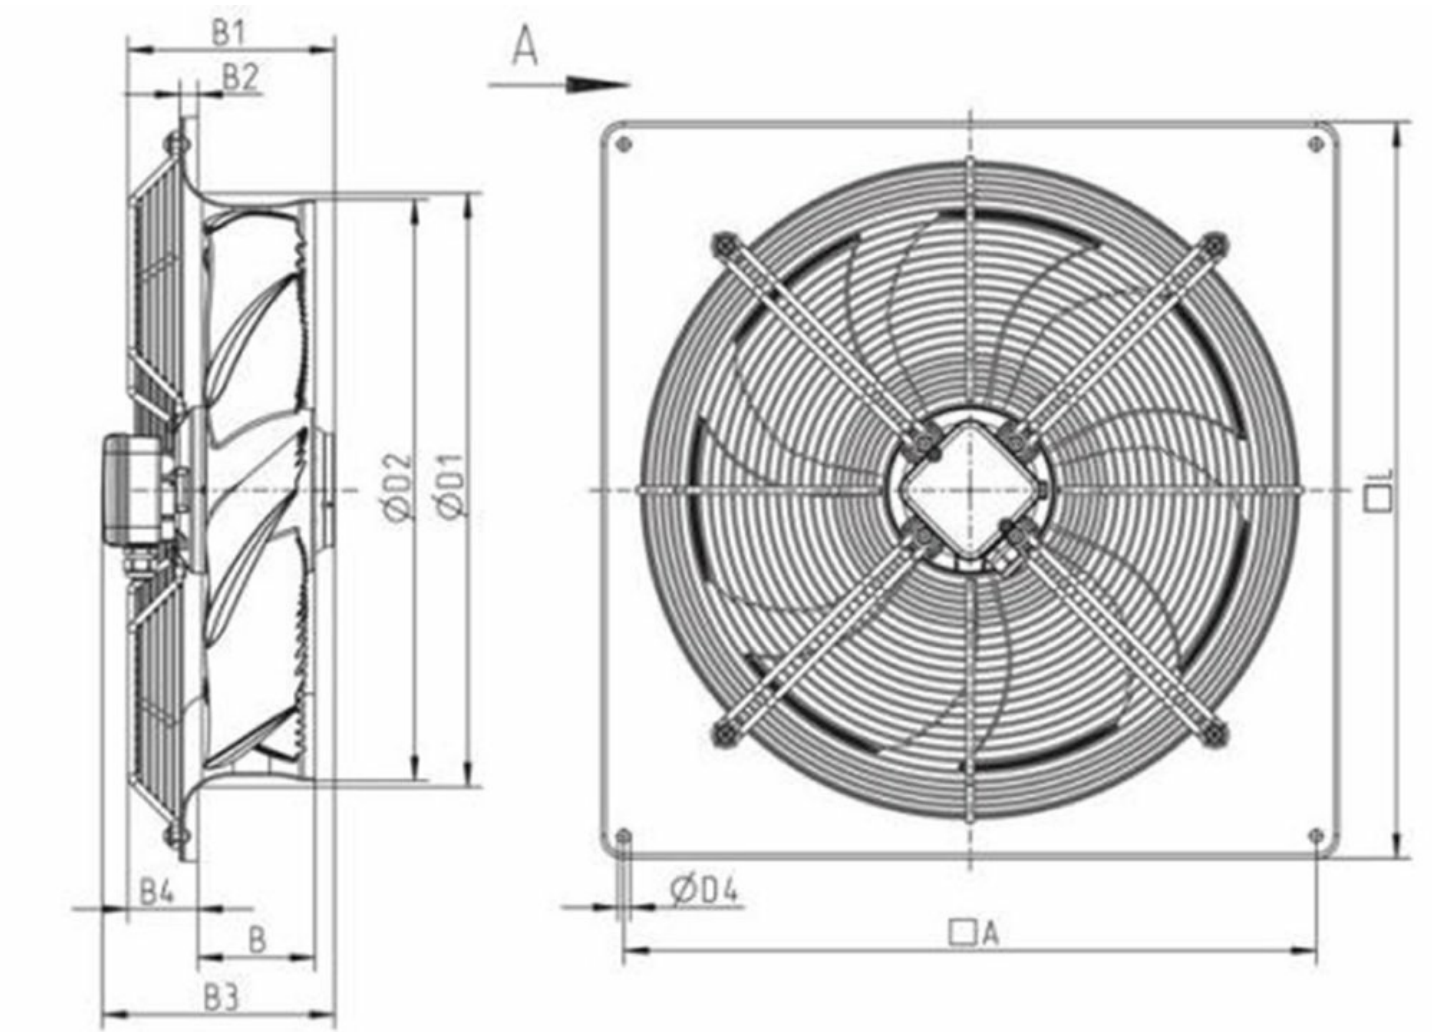

	□A	B	B1	B2	B3	B4	ØD1	ØD2	ØD4	□L
AW 630	750	130	225	20	246	50	664	643	11	805

Wiring

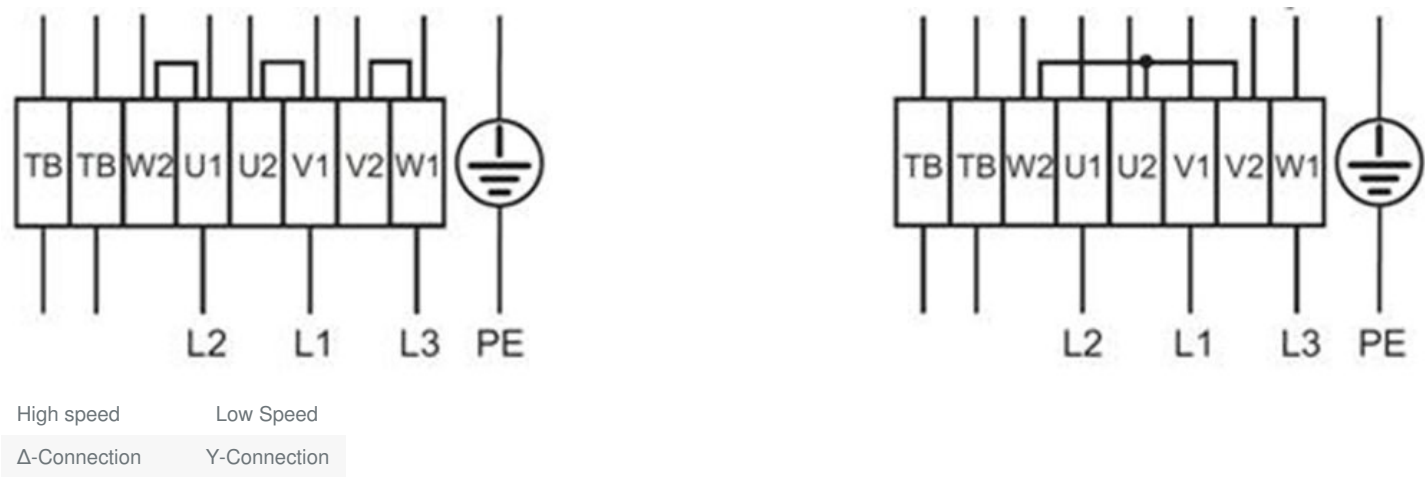

Ecodesign 327

Manufacturer	Systemair GmbH, Seehöfer Str. 45, DE-97944 Boxberg, Amtsgericht (court of registration) Mannheim, HRB 560437	
Type	AW 630DV	
Year of manufacture	See name plate of the fan	
Air flow qv	11,367	m³/h
Efficiency category	static	
Efficiency grade N	45.5	
Efficiency grade target N	40	
Speed (rpm) n	1,377	r.p.m.
Pressure increase total psf	212	Pa
Power consumption Ped	1,770	W
Overall efficiency	40.7	%
Variable speed drive	No	
Additional components	Components used to calculate the energy efficiency that are not apparent from the measurement category are detailed in the CE declaration.	
Maintenance	Information on installation, operation and mainenance is provided in the operating instructions.	
Recycling / disposal	Information on recycling and disposal is provided in the operating instructions.	

Accessories

- REV-5POL/07 ON/OFF (33980)
- RTRD 4 Speed cont. Systemair (5942)
- RTRDU 4 Speed contr. Systemair (5946)
- S-DT2SKT Two speed switch Y/D (2697)
- SG AW-D BGr 065, RAL 9005 (30605)

Documents

- L-BAL-001-SYSTEMAIR.PDF
- EU_DECLARATION_OF_CONFORMITY_AXIAL_FANS_EN_003.PDF

Specification

Axial fans of the AW sileo range do have a bionic shape of the fan blade, and are driven by external rotor motors. The AW range is equipped with a square wall plate, galvanized steel and powder coated in black (RAL9005). The protection guard at the inlet side is powder coated in black. The axial impeller is manufactured from pressure die cast aluminum and is powder coated in black. The impeller is balanced dynamically in two levels in accordance with DIN ISO 1940 part 1, quality G6.3. The motors are equipped with thermal contacts for motor protection, with leads to be connected to a motor protection unit, for example Systemair unit S-ET.