


Product 1126 HQD 500/6

Image



Characteristics

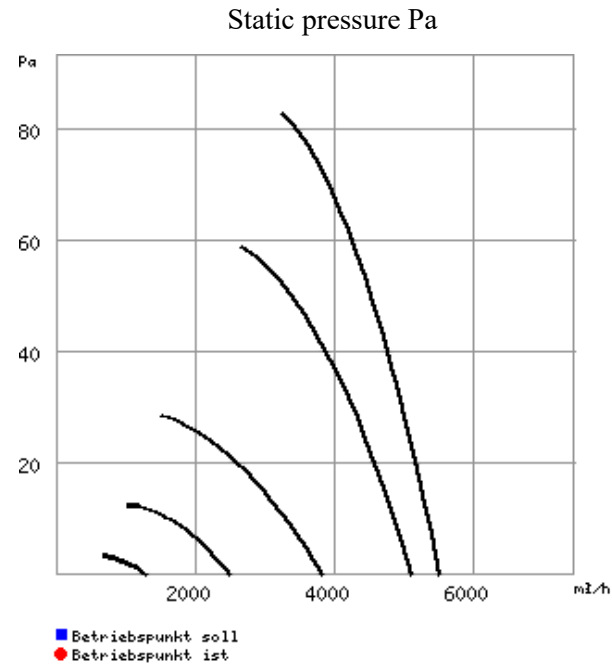

Air flow volume m³/h

Properties

Ref.no.	1126 - 020									
Model	HQD 500/6									
Description	High efficiency axial fan 3-ph. with safety guard guard									
Actual pressure	static									
Actual volume										
Max.Vol.	5480 m³/h									
Speed	919 min-1									
FLC un-controlled	0.48 A									
STC un-controlled	1.92 A									
Power	0.2180 kW									
Voltage	400 V / 3 ph / 50 Hz									
Max.temp.	60 °C (40 °C if controlled)									
Wiring diagram no.	469									
Weight	17.50 kg									
Delivery time	Ex stock									
Acoustic data:										
Sound in-duct	52 in 4 m									
Case breakout										
Intake	Hz	Total	125	250	500	1k	2k	4k	8k	
Lwa Intake	dB(A)	72	60	67	67	67	64	57	50	
Lwa Extract	dB(A)	0	0	0	0	0	0	0	0	
Lwa Breakout	dB(A)	0	0	0	0	0	0	0	0	

Description

HQD 500/6

High efficiency axial fan

3-ph.

with safety guard guard

Square plate high efficiency axial fan with inlet cone, directly driven.

Square mounting plate with drawn bell mouth inlet and duct in galvanised sheet-steel and finished with two coats of paint.

Highly efficient, profiled blade impeller from polymers, aerodynamically optimised to the application, dynamically balanced. Suitable for -30 °C to +60 °C.


Totally enclosed 3-phase squirrel cage motor with built-in thermal contacts, maintenance-free, speed controllable by voltage reduction, with low-noise sealed for life ball bearings.

Accessories

Image	Ref.no.	Model	Description	Group
	501	ESD 5	ELECTRONIC SPEED CONTROLLER 3 PH, 5 A	A
	780	EVK 500	ELECTRICAL LOUVRE GRILLES CONTROL VIA RELAY (BY OTHERS)	A
	811	F 500	ADAPTION PLATE FOR GRILLE	A
	5459	FU-BS 2,5	Frequency inverter Basic Sinus 400V 3PH 50/60HZ 2,5A	R
Additional part to product 5459:				
	1437	EDR	Electronic pressure controller for EC and AC fans with FU 24V / 0-10V	A
	1438	ETR	Electronic temperature controller for EC and AC fans with FU 24V / 0-10V	A
	1322	LDF 500	PRESSURE SENSOR FOR EUR 6, 0-500 PA MESSBEREICH 0-500 PA	A
	1325	LGF 10	AIR FLOW SPEED SENSOR FOR EUR 6	A
	1336	LTA 40	Outdoor temperature sensor to EUR 6 Temperature range: -20 to +60 °C	A
	1324	LTK 40	DUCT TEMPERATURE SENSOR FOR EUR 6	A
	1323	LTR 40	ROOM TEMPERATURE SENSOR FOR EUR 6	A
	1737	PA 24	Speed potentiometer with operating status signal 24V DC, surface installation	E
	1736	PU 24	Speed potentiometer with LED-light ring 24V DC, flush mounted	E
	4267	SA-3 10	Three step switch surface mounted version	E
	4266	SU-3 10	Three step switch flush mounted version	E
	9990	WSUP	WEEKLY AUTOTIMER WITH POTENTIAL-FREE CHANGEOVER	A
	9577	WSUP-S	AXIAL-HOCHLEISTUNGSVENTILATOR	A
	5849	MD	FULL MOTOR PROTECTION UNIT FOR 3 PH MOTORS	A
	756	RAG 500	RAIN-REPELLENT GRILLE	A
	1314	RDS 1	5 STEP TRANSFORMER CONTROLLER 3 PH, 400 V, 1.0 A WITH MOTOR PROTECTION UNIT	R
	1594	RHS 3+1	Isolator switch 3 pole isolator with additional terminal, 400V	A
	772	RVK 500	MANUAL GRILLE	A
	1500	TSD 0,8	5 STEP TRANSFORMER CONTROLLER 3 PH, 400 V, 0.8 A	R
	6516	TSSD 1	1 STEP TRANSFORMERS, 3 PH 400V FOR CONTROL PANELS, MAX. 1 A CONTENTS:2 PIECES	A
	764	VK 500	GRAVITY OPERATED SHUTTER MADE FROM POLYMERS	A
	1271	WS	UNIVERSAL SWITCH FOR 1 + 3 PH	A



Wiring diagram

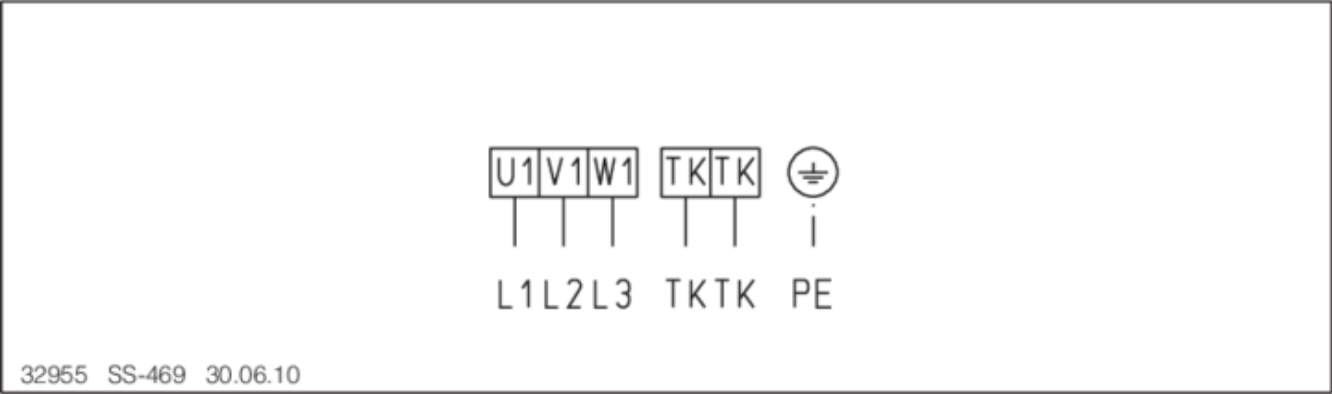

Dimensions

