

Technical Data Sheet

CODE 12456

VORTICE 230/9" ARI-LL-S

Flush mounted axial fans



Certifications



IMQ



CE



IMQ Performance



C Tick Mark



EAC




G-Mark

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,19
Absorbed Power max (W)	35
Frequency (Hz)	50-60
Inlet	Automatico
Insulation Class	II°
IP	X4
Max absorbed Power at 60Hz (W)	40
Max ambient temperature for continuous operation (°C)	50
Max ambient temperature for continuous operation 60Hz (°C)	50
Ø Discharge Hole (mm)	335 ÷ 340

Voltage (V)	220-240
Weight (Kg)	3,88
Delivery max - Extract (l/s)	188,9
Delivery max - Extract (m3/h)	680
Delivery max - Intake (l/s)	97,2
Delivery max - Intake (m3/h)	350
Delivery max (m3/h)	680
RPM	1160
Rpm - Exhaust	1160
Rpm - Supply	1260
Sound Pressure level Lp [dB (A)] 3m	45,3

DIMENSIONS

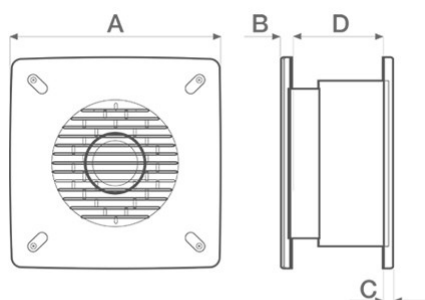

Ø wall hole	335/340
Size A (mm)	400
Size B (mm)	400
Size C (mm)	11
Size D (mm)	180

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 12456

VORTICE 230/9" ARI-LL-S


Flush mounted axial fans




DESCRIPTION

- Model designed for installation recessed into wall.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight)
- Nominal diameter 230 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

CURVES

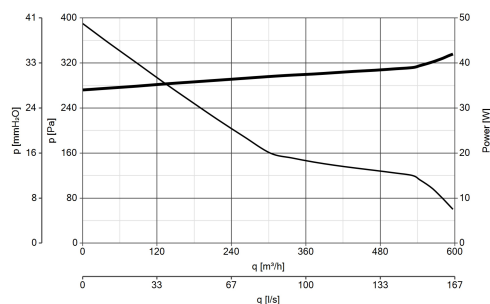


ACCESSORIES



KIT TE 230/9" (TORRETTA)

Code 13002



KIT SO (SOFFITTO)

Code 13012



KIT ML 230/9" (MURO-LARGO)

Code 13016



KIT TC 230/9" (TETTO CON CONDOTTO)

Code 13028



CR5N

Code 12941



CREN

Code 12944



C PIR

Code 12998

C TIMER



PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

C TIMER
Code 12999

C TEMP
Code 12992

C SMOKE
Code 12993

C HCS
Code 12994