



Condensate removal pumps

Air conditioning - Refrigeration - Heating





StrutFoot

From the forming of **Pumps2go Ltd** in 2015, we have grown into a well-established and respected company nationwide. Our ethos has remained the same and that is to supply the best products available at competitive prices. Our service, technical support, product availability and planning are paramount in the success of our business.

Pumps2go is the Distributor for the complete range of **SICCOM** condensate removal pumps, level and proximity sensors and float assemblies. P2G Ltd is responsible for the supply into the HVAC, Refrigeration and Heat Pump industries covering the UK and Eire regions.

In April 2022 **Pumps2go Ltd** was acquired by the **StrutFoot** Group of companies, who are a well-established manufacturer of HVAC flat roof support frames, plant decks, louvre supports and rubber and plastic feet. They can also boast an in-house manufacturing line of ancillary products and have the ability to offer bespoke products to customer's design criteria.

SICCOM S.A.S was founded in 1979 and specialises in design and manufacture of condensate removal pumps, level and proximity sensors and float assemblies. Siccom's technology is designed and implemented by its own engineering department, made up of a number of highly qualified engineers and technicians. Siccom constantly strives to innovate and now enjoys worldwide success in more than 50 countries.

StrutFoot Pumps2go Ltd SICCOM **The perfect partnership**

Eco-design

Fully aware that the virtuous eco-design cycle is beneficial to everyone, SICCOM has chosen to fully integrate this approach into its various production phases.

The mini FLOWATCH® 2, the brand's star product, has been the first product illustrating this approach. The environmental impact has been reduced from 5 to 20%, and the life has been multiplied by 2. More recently, the mini FLOWATCH® 0 reached 65.6% of environmental impact reduction for its use phase!

Our approach:

«Significant environmental improvements,
better service for our customers.»





























Certifications

All our sites have received ISO 9001 version 2015 certification.

Quality procedures encompass all of the company's services, ensuring optimal quality levels.



CONTENTS

				Flowrate max	Discharge head max	Page	
	Air conditioning	Refrigeration	Heating				
PREMIUM RANGE	mini FLOWATCH® 2				15 l/h	10 m	6
	mini FLOWATCH® 2 COMFORT NEW				15 l/h	10 m	7
	FLOWATCH® DESIGN				15 l/h	10 m	8
	mini FLOWATCH® 3 WiFi				15 l/h	10 m	9
	mini FLOWATCH® 3 WiFi DESIGN				15 l/h	10 m	10
	FLOWATCH® VISION				15 l/h	10 m	11
	FLOWATCH® TANK 1.3 LITRE				788 l/h	5.5 m	12
ECO RANGE	Centrifugal pump CP08				60 l/h	110 cm	13
	ECO LINE				13.2 l/h	10 m	14
	mini FLOWATCH® 1 EVO NEW				13.2 l/h	10 m	15
	FLOWITA EVO NEW				13.2 l/h	10 m	16
	ECOTANK+ 1.2 / ECOTANK+ 2.5				300 l/h (50Hz) 400 l/h (60Hz)	4.6 m (50Hz) 6 m (60Hz)	17
DUO RANGE	mini FLOWATCH® 2 DUO				19 l/h	10 m	18
	FLOWATCH® VISION DUO				19 l/h	10 m	19
	SUNNY FLOWATCH® DUO				19 l/h	10 m	20
	Pump accessories						21
Level and proximity sensors						22	

PREMIUM RANGE

Reliable, longlasting, silent and efficient, these pumps perfectly meet instalers and final users' expectations.

They are all equipped with an **integrated alarm** (except CP08) are among the **quietest on the market**.

ECO RANGE

A range of pumps **simple, reliable and easy-to-install**.

Meet SICCOM expertise in **entry-level pumps** at prices even more attractive.

DUO RANGE

SICCOM proposes a range especially developed for removing condensates from **gas condensing boilers**.

These pumps are alternatives, more compact and silent, to tank pumps such as FLOWATCH® TANK and ECOTANK+



















Find the right pump

Compatible a



Find the right pump				
mini FLOWATCH® 2				
mini FLOWATCH® 2 COMFORT				
FLOWATCH® DESIGN				
mini FLOWATCH® 3 WiFi				
mini FLOWATCH® 3 WiFi DESIGN				
FLOWATCH® VISION				
FLOWATCH® TANK				
Centrifugal pump CP08				
ECO LINE				
mini FLOWATCH® 1 EVO				
FLOWITA EVO				
ECOTANK+ 1.2 / ECOTANK+ 2.5				
mini FLOWATCH® 2 DUO				
FLOWATCH® VISION DUO				
SUNNY FLOWATCH® DUO				



Appliance			Specifications		Acoustic level
			Flowrate max	Discharge head max	Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)
			15 l/h	10 m	
			15 l/h	10 m	
			15 l/h	10 m	
			15 l/h	10 m	
			15 l/h	10 m	
			15 l/h	10 m	
			788 l/h	5.5 m	
			60 l/h	110 cm	
			13.2 l/h	10 m	
			13.2 l/h	10 m	
			13.2 l/h	10 m	
			300 l/h (50Hz) 400 l/h (60Hz)	4.6 m (50Hz) 6 m (60Hz)	
			19 l/h	10 m	
			19 l/h	10 m	
			19 l/h	10 m	



mini FLOWWATCH® 2

Mini solenoid pump reliable and silent for the condensate removal of air conditioners up to 10kW / 36000BTU.



SICCOM

Ref: DE05LC4400

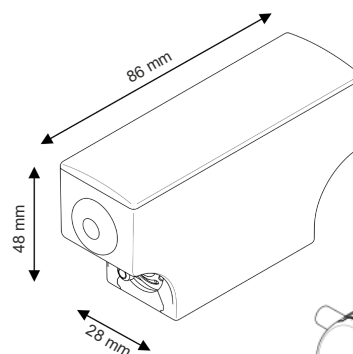

Hose diameter
Suction : 4/6 mm - supplied
Discharge : 6/9 mm - not supplied


SPECIFICATIONS

Flowrate max	15 l/h
Suction head max	2 m
Discharge head	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level*	
Protection rating	IP64
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.6 m
Dimensions	86 x 28 x 48 mm / 75 x 36 x 38 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 100% of the time if necessary.

FLOWRATE

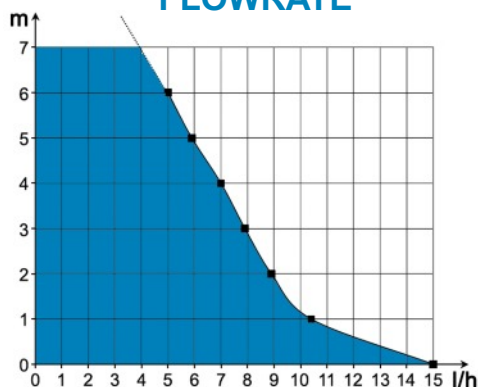

Recommended accessory



Kit COMFORT

Thanks to its patented foam casing, this kit reduces the noise level and makes the pump easier to install.

Ref: GC077G1027

BENEFITS



Very silent

Very silent pump (20.2 dBA), suitable for an installation in any room.



IP64 protection

Protected against water splashes and dust.



Quick connectors

Make installation and maintenance easier.



Clear reservoir

Facilitates maintenance thanks to a quick visualization of the reservoir state.



Brass outlet

More solid and reliable than plastic outlet.



Accessories included

All accessories required for installation are included in the box.

CONTENTS



Pump - Reservoir with air-vent tube - Power / alarm cable - Reservoir stand - Double-side adhesive - Inlet tube - Suction tube 1.8m - 1 clamp

mini FLOWWATCH® 2 COMFORT




SICCOM

The best mini pump on the market in a quieter and easy-to-install version, for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCD750



NEW

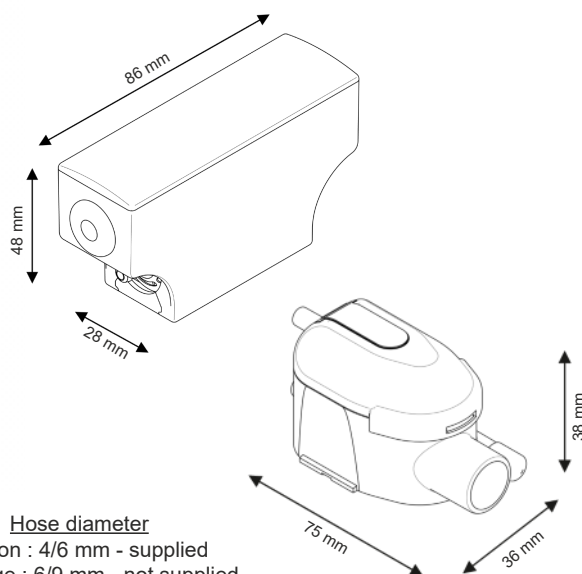

Hose diameter
Suction : 4/6 mm - supplied
Discharge : 6/9 mm - not supplied


SPECIFICATIONS

Flowrate max	15 l/h
Suction head max	2 m
Discharge head	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level*	
Protection rating	IP64
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.6 m
Dimensions	86 x 28 x 48 mm / 75 x 36 x 38 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 100% of the time if necessary.

FLOWRATE

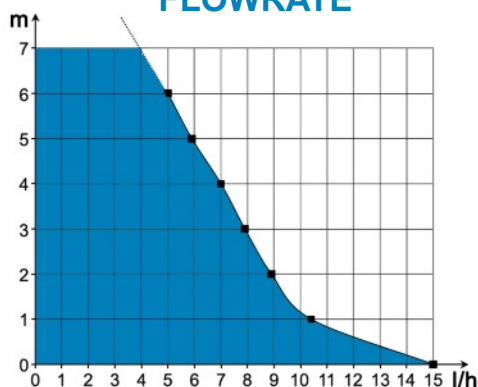

CONTENTS

Pump - Reservoir with air-vent tube - Power / alarm cable - Comfort casing - Pump stand - Reservoir stand - Stop Siphoning - Double-sided adhesive - Inlet tube - Suction tube 1.8m - 4 clamps

BENEFITS

New casing Comfort

The new Comfort casing is composed of a custom-made patented foam.

It dampens pump vibrations and reduces the perceived noise level.



Reliability proven

The mini FLOWWATCH® 2, included, is a reliable and durable pump sold in more than 35 countries.



Very silent

Thanks to its casing, the pump is extremely quiet and suitable for installation in any room.



Pump stand included

Make pump installation and maintenance easier.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.



Quick connectors

Make installation and maintenance easier.



IP64 protection

Protected against water splashes and dust.




FLOWATCH® DESIGN

Complete kit, in-duct pump, for the condensate removal of air conditioners up to 10kW / 36000BTU.



SICCOM

Ref: DE05LC9460

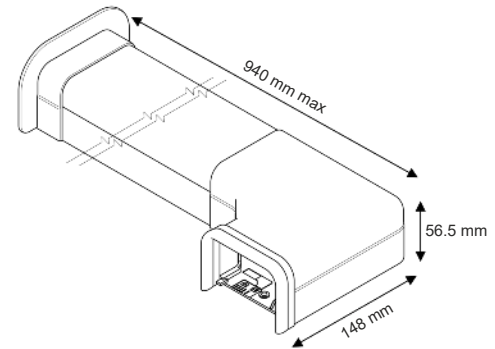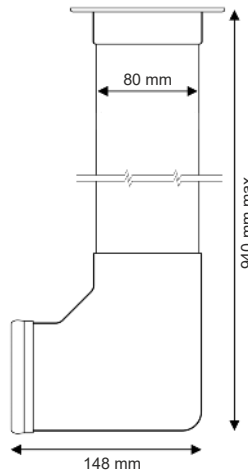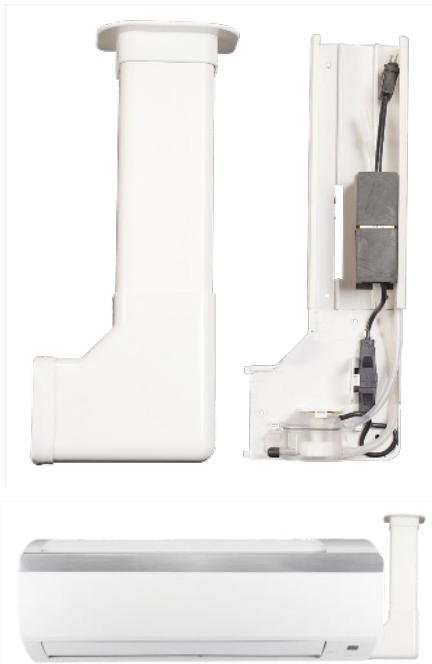

Hose diameter
Suction : 4/6 mm - supplied
Discharge : 6/9 mm - not supplied


SPECIFICATIONS

Flowrate max	15 l/h
Discharge head	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level*	
Protection rating	IP64
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.6 m
Trunking dimensions only	800 x 80 x 55 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 100% of the time if necessary.

FLOWRATE

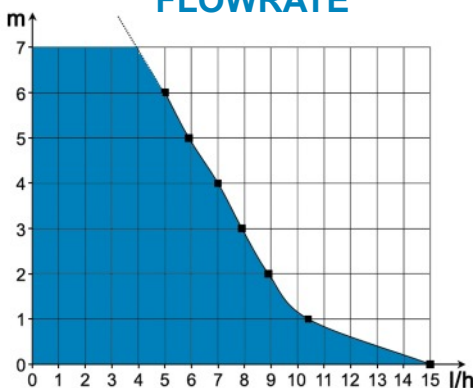

Recommended accessory



Connection extension kit

Allows the pump to be moved into a false ceiling, thus reducing the noise level.

Ref: GC1KCTC710

BENEFITS



mini FLOWATCH® 2 included

It assures a high reliability and an easy maintenance.



Very silent

Very silent pump (20.2 dBA), suitable for an installation in any room.



IP64 protection

Protected against water splashes and dust.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.



Nice design

Thanks to its shape and its finishing accessories (included), FLOWATCH® DESIGN offers great aesthetics qualities.



Kit pre-assembled

Pump is already installed in its duct. Installation is easy and quick.

CONTENTS



Duct with elbow- Finishing gasket - Finishing ceiling plate - Pump in absorber bracket - Reservoir with air-vent tube - Power / alarm cable - Reservoir stand - Inlet tube - Suction tube 0.25m - Screws and rawlplugs

mini FLOWWATCH® 3 WiFi



SICCOM

As a real product of predictive maintenance, the mini FLOWWATCH® 3 WiFi allows to remotely supervise a fleet of pumps and to anticipate a maintenance on a pump or an air conditioner. For air conditioners up to 10kW / 36000BTU.

Ref: DE05WFCC760



The first
condensate pump
WiFi connected




Monitor your **pump fleet**
in the blink of an eye!

Pump name	Alarm	Maintenance to be done
Pump Reception hall	OK	Yes
Pump Breakfast room	OK	No
Pump Room 001	NOT OK	No
Pump Room 002	OK	No
Pump Room 003	NOT OK	Yes
Pump Room 004	OK	Yes
Pump Room 005	OK	No
Pump Room 006	OK	No

View all pump datas

Pump name	Pump Room 001
Commissioning date	05/10/2019 - 08:24
Last maintenance date	04/11/2019 - 11:13
Maintenance to be done	No
Alarm overheating	OK
Alarm float high level	NOT OK
Alarm AC Freeze up	OK
Condensate temperature	11°C
Pump temperature	21°C

The pump sends you an email
when an alarm triggers!

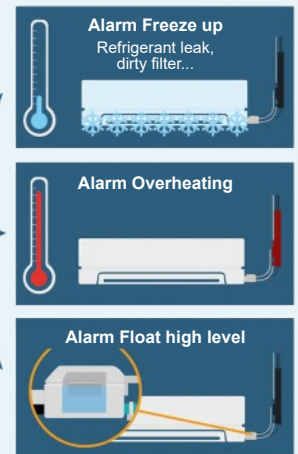


SPECIFICATIONS

Flowrate max	15 l/h
Suction head max	2 m
Discharge head	10 m
Electrical power	21W
Voltage	220-240V 50/60Hz
Alarm	NC
Noise level*	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.6 m
Dimensions	272 x 35 x 43 mm / 75 x 36 x 38 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 100% of the time if necessary.

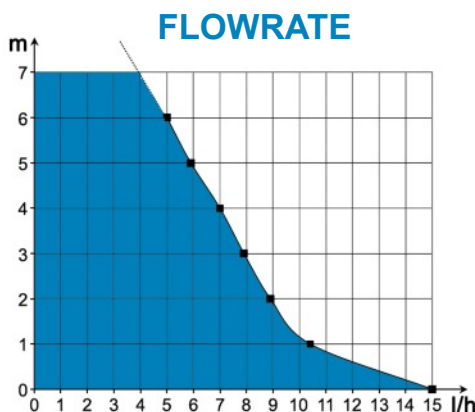

BENEFITS



Web interface

The interface is accessible from a computer, smartphone, or tablet and requires no software or application installation.



Email sending in case of alarm

Be notified immediately in the event of a malfunction (3 alarm cases).



Real-time supervision

Access a wealth of information about your pump fleet in just a few clicks.



Pump interconnection

Create a network of pumps, and allow them to communicate with each other for more productive management of your pump fleet.



Extremely silent

The quietest pump of our range (18.6 dBA), for an installation in any room.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

CONTENTS

Pump - Reservoir with air-vent tube - Reservoir stand - Double-side adhesives - Inlet tube - Suction tube 1.8m - Clamps

mini FLOWWATCH® 3 WiFi DESIGN



siccom

WiFi connected pump in duct version, ready to install, for the condensate removal from air conditioners up to 10kW / 36000BTU.

Ref: DE05WFCD760



All the benefits of the
mini FLOWWATCH® 3 WiFi
in a trunking version



BENEFITS



Web interface

The interface is accessible from a computer, smartphone, or tablet and requires no software or application installation.



Email sending in case of alarm

Be notified immediately in the event of a malfunction (3 alarm cases).

SPECIFICATIONS

Flowrate max	15 l/h
Discharge head	10 m
Electrical power	21W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level*	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.6 m
Trunking dimensions only	800 x 80 x 55 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 100% of the time if necessary.



Real time supervision

Access a wealth of information about your pump fleet in just a few clicks.



Pump interconnection

Create a network of pumps, and allow them to communicate with each other for more productive management of your pump fleet.



Extremely silent


The quietest pump of our range (18.6 dBA), for an installation in any room.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

FLOWRATE

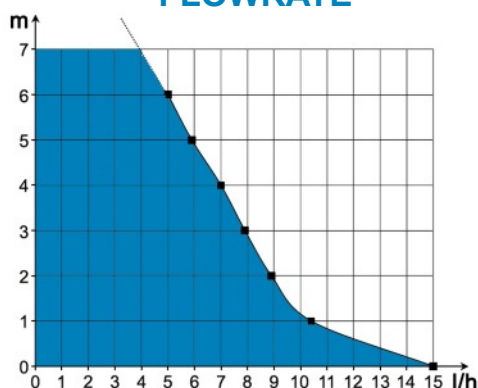

Kit pre-assembled

Pump is already installed in its duct. Installation is easy and quick.

CONTENTS



Duct with elbow- Finishing gasket - Finishing ceiling plate - Pump - Reservoir with air-vent tube - Power / alarm cable - Reservoir stand - Inlet tube - Suction tube 0.25m - Screws and rawlplugs


FLOWATCH® VISION

The only monoblock wall pump on the market, installed horizontally or vertically, for the condensate removal of air conditioners up to 10kW / 36000BTU.



SICCOM

Ref: DE05LCB900

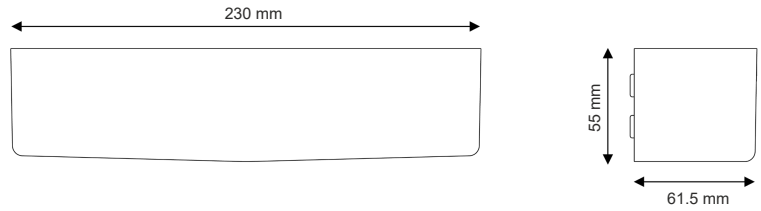

Hose diameter
Discharge : 6/9 mm - not supplied



BENEFITS

4 possible installations

World first - Can be installed horizontally or vertically, on the right or on the left of the air conditioner.



SPECIFICATIONS

Flowrate max	15 l/h
Discharge head	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level*	
Protection rating	IPX3
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.4 m
Dimensions	230 x 61.5 x 55 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 100% of the time if necessary.

Easy maintenance

Access to the pump elements (reservoir, tubes etc.) is made by removing the cover.



Very silent

Very silent pump, suitable for an installation in any room.




Record size

Thanks to its small size, the FLOWATCH® VISION is the most discreet and aesthetic monoblock wall pump of the market.




FLOWRATE

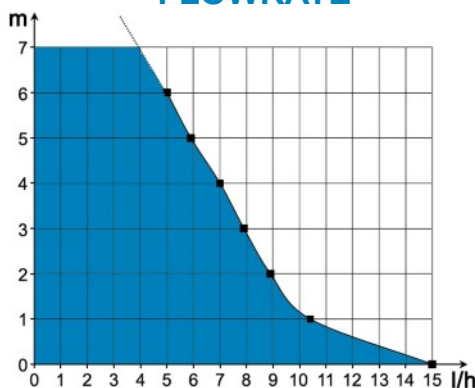

Reservoir with removing filter

Prevents dust and particles to damage the pump. Easy to clean.



CONTENTS

Pump - Reservoir for horizontal installation - Reservoir for vertical installation - Inlet tube - Screws and rawlplugs - 1 clamp




FLOWATCH® TANK 1.3LTR



siccom

Centrifugal pump high efficiency for the removal of acid and charged condensates of gas condensing boilers.

Ref: DE13QCA700

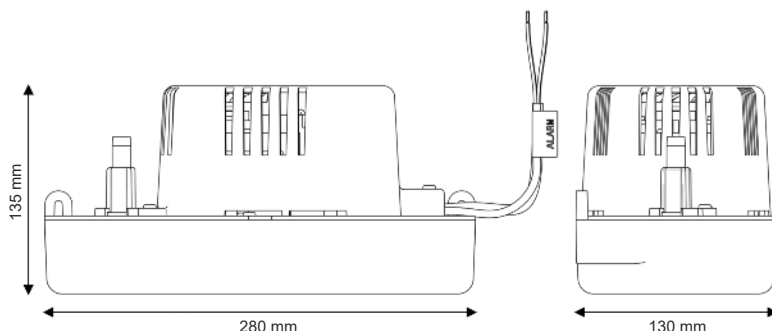

pH > 2.5

Hose diameter

Discharge : 9/12 ou 6/9 mm - not supplied




SPECIFICATIONS

Flowrate max	788 l/h
Discharge head	5.5 m
pH tolerated	pH > 2.5
Condensate max temperature	60°C
Electrical power	80W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level*	
Protection rating	IP20
Thermal protection	Yes
Operating cycle**	30%
Power / alarm cable	2 m / 1 m
Tank capacity	1.3L
Dimensions	280 x 130 x 135 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 30% of the time if necessary.

FLOWRATE

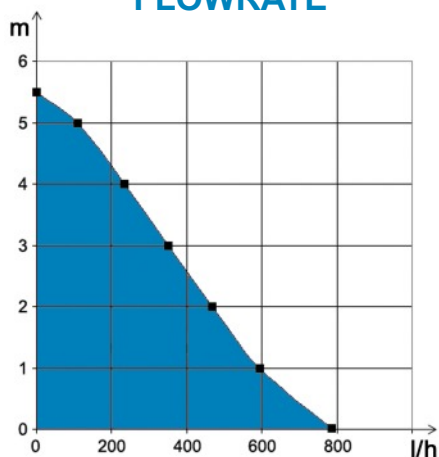

BENEFITS



High efficiency

Flowrate 788 l/h

Discharge head 5.5 m



Reversible pump

Allows the FLOWATCH® TANK to be installed in any configuration.



Removable check valve

The check valve supplied can be removed easily (1/4 turn) to be cleaned.



2 possible outlet diameters

Original outlet for 9/12mm tube
+ reducer for 6/9mm tube



Inlet adapter included

Avoids any problems in connecting the boiler to the pump.

(Can be purchased separately)



CONTENTS

Pump with check valve, 3 taps -
Inlet adapter - 6/9mm outlet adaptor -
Screws and rawlplugs


Centrifugal pump CP08

Universal centrifugal pump dedicated to split cassettes.



SICCOM

Ref: CP08SC6641

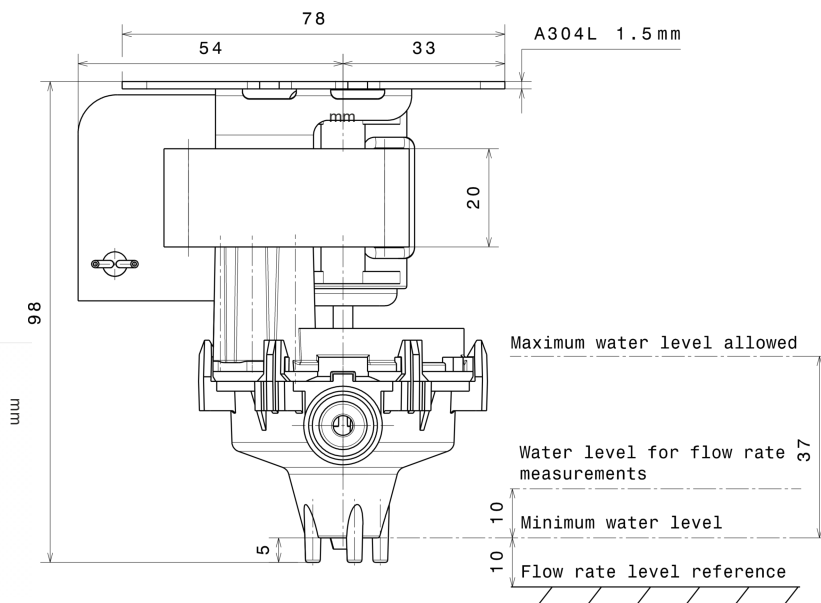


SPECIFICATIONS

Flowrate max	60 l/h
Discharge head	110 cm
Electrical power	8W
Voltage	220-240V 50/60Hz
Noise level*	
Protection rating	IP54
Temperature rise	66K
Operating cycle**	100%
Outlet tube	Ø 14 mm
Dimensions	82.5 x 76 x 97.3 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 100% of the time if necessary.

FLOWRATE

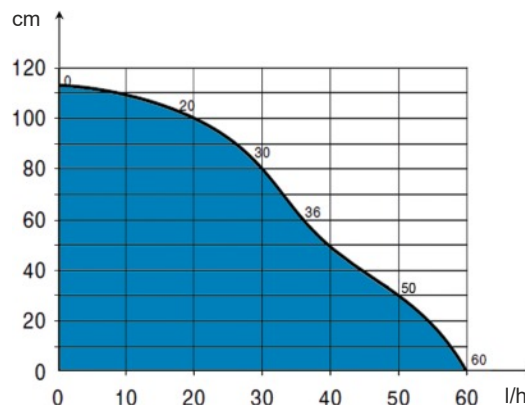

BENEFIT



Universal plate

The CP08 mounting plate has been designed to fit the majority of cassette air conditioners on the market.

It can therefore easily replace another model of centrifugal pump at a cheaper price!



ECO LINE

Mini in-line pump (solenoid), ultra compact and easy to install, for the condensate removal of air conditioners up to 10kW / 36000BTU.



SICCOM

Ref: DE05SCC600

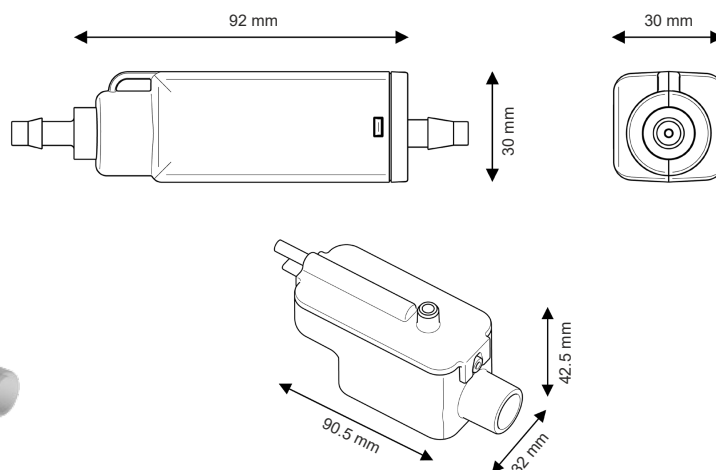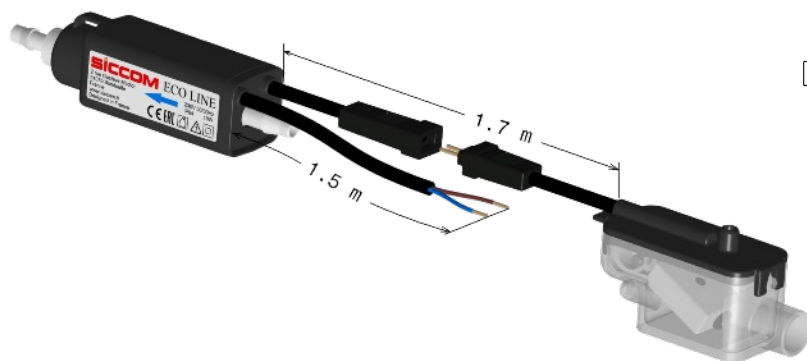

Hose diameter
Suction : 6/9 mm - not supplied
Discharge : 6/9 mm - not supplied

SPECIFICATIONS


Flowrate max	13.2 l/h
Suction head max	1.5 m
Discharge head	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm*	No alarm
Noise level**	
Protection rating	IP64
Thermal protection	Yes
Operating cycle***	100%
Power cable	1.5 m
Dimensions	92 x 30 x 30 mm / 90 x 32 x 42 mm

* Alarm option available on request.

** Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

*** The pump is able to run 100% of the time if necessary.

FLOWRATE

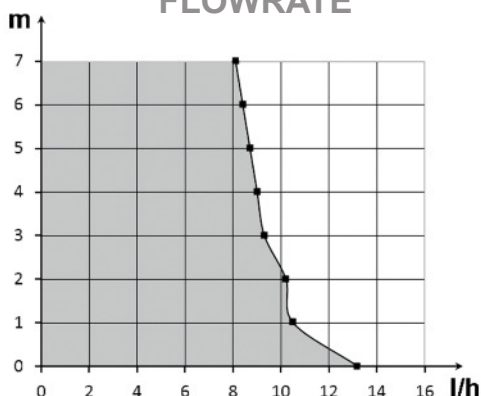

BENEFITS

ULTRA COMPACT pump

The most compact pump of the market!
Easy installation in a duct or inside the air conditioner.



IP64 protection

Protected against water splashes and dust.



Quick connectors

Make installation and maintenance easier.



NEW 2022 - WATERPROOF removable reservoir

The reservoir, which can be removed for easy maintenance, now has a waterproof seal!



Hanging bracket

This astucious hook allows to fix or hang the pump wherever you want (duct, false ceiling, inside de unit...).



Accessories included

All necessary accessories are included in the box.



CONTENTS

Pump - Reservoir - Double-side adhesive for reservoir fixing - Inlet tube - 3 clamps

mini FLOWWATCH® 1 EVO

Economical mini solenoid pump, with alarm, for the condensate removal of air conditioners up to 10kW / 36000BTU.





SICCOM

Ref: DE05LCD600



NEW

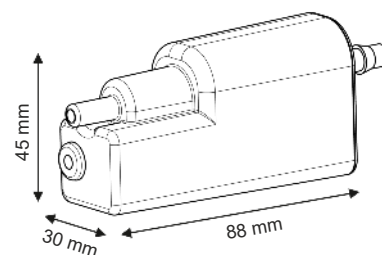

Hose diameter

Suction : 4/6 mm - supplied

Discharge : 6/9 mm - not supplied


SPECIFICATIONS

Flowrate max	13.2 l/h
Suction head max	1.5 m
Discharge head	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NC
Noise level*	
Protection rating	IP24
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.5 m
Dimensions	88 x 30 x 45 / 75 x 36 x 38 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 100% of the time if necessary.

FLOWRATE

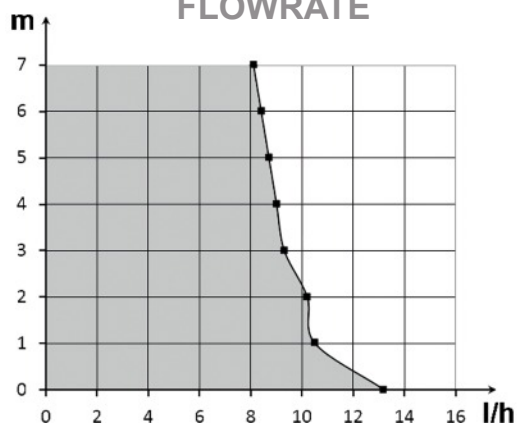

BENEFITS



Quick connectors

Make installation and maintenance easier.



Clear reservoir

Facilitates maintenance thanks to a quick visualization of the reservoir state.



Removable integrated filter

The reservoir has a metal filter that can be easily removed for quick cleaning.



Alarm function

The NC alarm on the mini FLOWWATCH® 1 EVO allows to cut off the air conditioner power supply in the event of condensate overflow.



IP24 protection

Protected against water splashes.



Accessories included

Necessary accessories are supplied in the box.



CONTENTS

Pump - Reservoir with air-vent tube
- Double-side adhesive - Inlet tube -
Suction tube 1.5m - 3 clamps

FLOWITA EVO

Wall-mounted monobloc pump, dismantlable, for the condensate removal from air conditioners up to 10kW / 36000BTU.




SICCOM

Ref: DE05LCC440



NEW

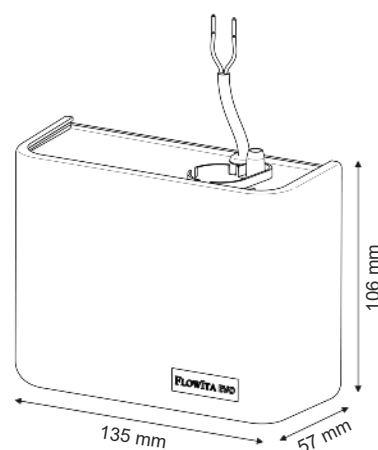

Hose diameter

Discharge : 6/9 mm - not supplied




SPECIFICATIONS

Flowrate max	13.2 l/h
Discharge head	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm*	Optional
Noise level**	
Protection rating	IP24
Thermal protection	Yes
Operating cycle***	100%
Power cable	0.8 m
Tank capacity	170 ml
Dimensions	135 x 57 x 106.5 mm

* Alarm option available on request.

** Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

*** The pump is able to run 100% of the time if necessary.

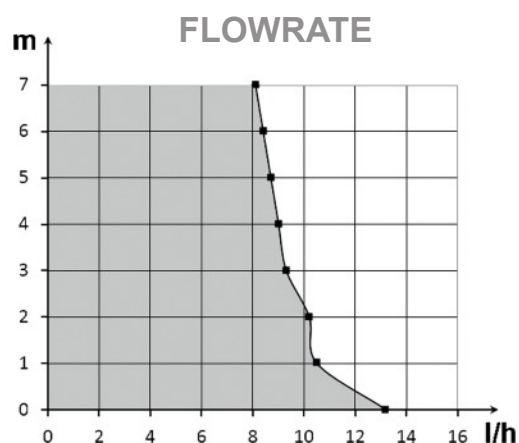


BENEFITS

Dismountable

The FLOWITA EVO can be disassembled in seconds!

Front panel, tank, suction tube... all the elements are removable.

Installation and maintenance has never been so quick and easy!



100ml pumping cycles

Its large reservoir allows the pump to operate optimally: larger and less frequent pumping cycles.



Extremely silent

The most discreet wall-mounted pump on the market!



Quick installation

The FLOWITA EVO can be installed easily and quickly underneath any air conditioner.



IP24 protection

Protected against water splashes.

CONTENTS

Pump - Screws and rawlplugs



ECOTANK+ 1.2 / 2.5

Centrifugal tank pump for the removal of condensates from air conditioners, refrigerated displays or gas condensing boilers.



SICCOM

Ref ECOTANK+ 1.2 50Hz: DE12QCC610

Ref ECOTANK+ 2.5 50Hz: DE25QCC620

Ref ECOTANK+ 2.5 60Hz: DE25QCD140



pH > 2.5




SPECIFICATIONS

	50Hz version	60Hz version
Flowrate max	300 l/h	400 l/h
Discharge head	4.6 m	6 m
pH tolerated	pH > 2.5	pH > 2.5
Condensates max temp.	40°C	40°C
Electrical power	65W	65W
Voltage	230V 50Hz	230V 60Hz
Alarm	NO-NC	NO-NC
Noise level		
Protection rating	IP24	IP24
Thermal protection	Yes	Yes
Operating cycle*	30%	30%
Cable lenght	1.5 m	1.5 m
Dimensions ECOTANK+ 1.2	280 x 130 x 129 mm	
Dimensions ECOTANK+ 2.5	280 x 130 x 159 mm	

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 30% of the time if necessary.

FLOWRATE

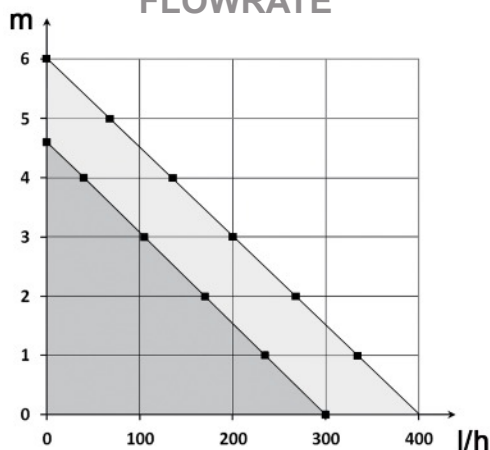

BENEFITS



IP24 protection

The pump is protected against water splashes.



Universal electric plug

Power/alarm cable can be taken off, making easy installation and maintenance.



Outlet for 6/9 or 9/12 mm tube

Thanks to its connector supplied, the discharge can be made with a 6/9mm or a 9/12mm tube.



High capacity tank

Thanks to its 2.5 l tank, the ECOTANK+ 2.5 reduces the number of pumping cycles and answers to a great deal of applications.



Compact tank pump

With only 129mm height, the ECOTANK+ 1.2 fits easily in any space.



Reversible tank

Turning the tank allows to fit in any configuration.



PVC clear tube included (only in 60Hz version)

A 6m discharge tube (10x13mm diameter) is included in the ECOTANK+ 2.5 60Hz version.



CONTENTS

Pump - Cable power / alarm - 6/9mm outlet adaptor - Screws and rawlplugs - PVC clear tube 6m (only in 60Hz version)

mini FLOWATCH® 2 DUO




SICCOM

Mini solenoid pump reliable and silent for the condensate removal of gas condensing boilers up to 60kW / 200 000BTU.

Ref: DE05LCC500



pH > 2.5

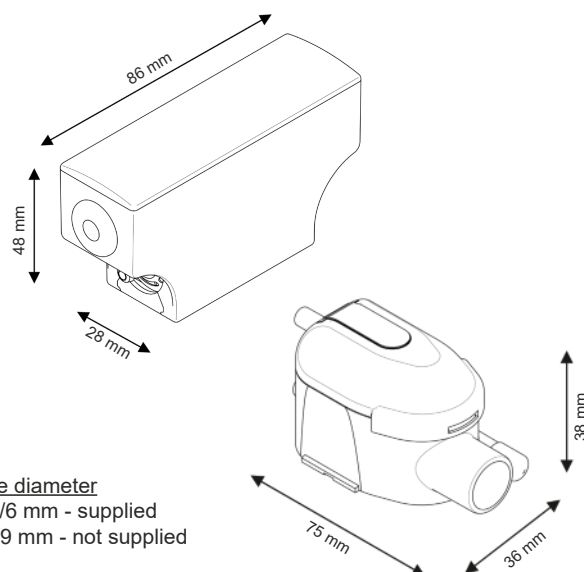


SPECIFICATIONS

Flowrate max	19 l/h
Suction head max	0,5 m
Discharge head	10 m
pH tolerated	pH > 2.5
Condensate max temperature	35°C
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level*	
Protection rating	IP64
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.6 m
Dimensions	86 x 28 x 48 mm / 75 x 38 x 36 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 100% of the time if necessary.

FLOWRATE

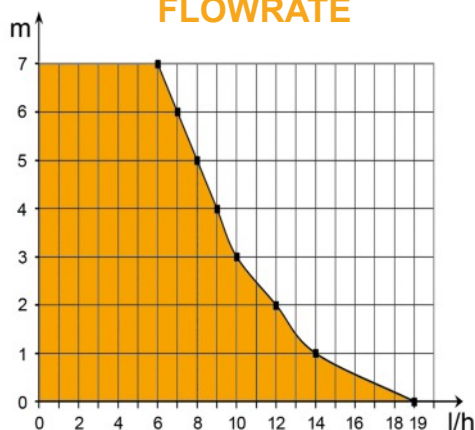

BENEFITS



Very silent

Very silent pump, suitable for an installation in any room.



Quick connectors

Make installation and maintenance easier.



Treated brass outlet

This brass outlet is specially treated to support acid condensates, and is more solid and reliable than plastic outlet.




IP64 protection

Protected against water splashes and dust.



Clear reservoir

Facilitates maintenance thanks to a quick visualization of the reservoir state.



Kit Silence supplied

Pump stand and reservoir stand make the installation easier and reduce the noise level.



CONTENTS

Pump - Reservoir with air-vent tube - Power / alarm cable - Pump stand - Reservoir stand - Double-side adhesive - Inlet tube - Suction tube 0.25m - 1 clamp

FLOWATCH® VISION DUO




SICCOM

Monoblock wall pump (solenoid), silent and innovative, for the condensate removal of gas condensing boilers up to 60kW / 200 000BTU.

Ref: DE05LCC510



pH > 2.5

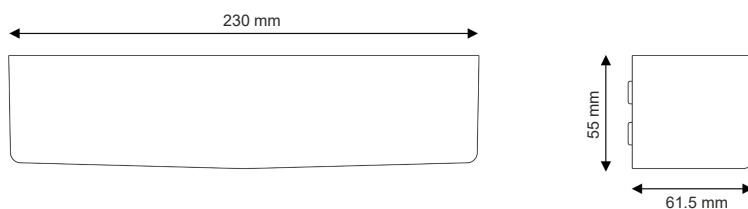

Hose diameter


Discharge : 6/9 mm - not supplied

SPECIFICATIONS

Flowrate max	19 l/h
Discharge head	10 m
pH tolerated	pH > 2.5
Condensate max temperature	35°C
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level*	
Protection rating	IPX3
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.4 m
Dimensions	230 x 61.5 x 55 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 100% of the time if necessary.

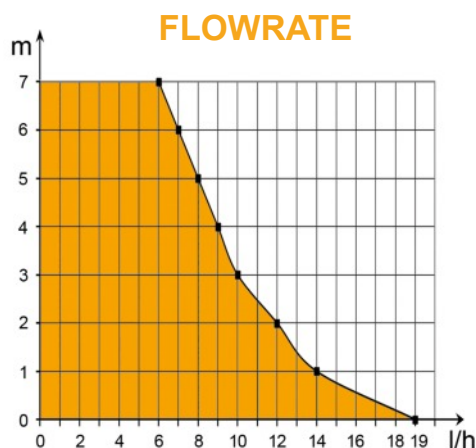

BENEFITS



4 possible installations

World first - Can be installed horizontally or vertically, on the right or on the left of the boiler.



Very silent

Very silent pump, suitable for an installation in any room.



Very easy maintenance

Access to the pump elements (reservoir, tubes etc.) is made by removing the cover.



Record size

Thanks to its small size, the FLOWATCH® VISION DUO is the most discreet and aesthetic monoblock wall pump of the market.



Reservoir with removable filter

Prevent dust and particles to damage the pump. Easy to clean.



CONTENTS

Pump - Inlet tube - Screws and rawplugs
- 1 clamp



SUNNY FLOWWATCH® DUO



SICCOM

Mini tank pump (solenoid) for the condensate removal of gas condensing boilers up to 60kW / 200 000BTU.

Ref: DE05NCC090

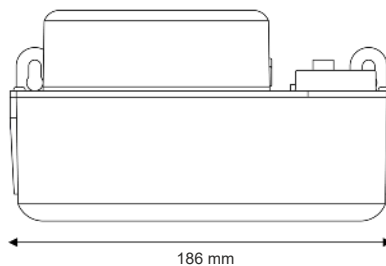

Hose diameter
Discharge : 6/9 mm - not supplied

pH > 2.5




SPECIFICATIONS

Flowrate max	19 l/h
Discharge head	10 m
pH tolerated	pH > 2.5
Condensate max temperature	35°C
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level*	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.5 / 1.3 m
Dimensions	186 x 110 x 100 mm

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 100% of the time if necessary.

FLOWRATE

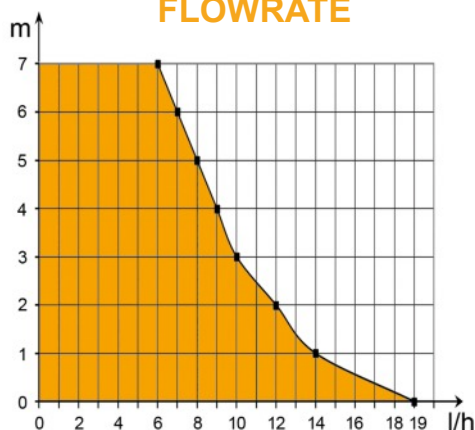

BENEFITS



Very silent

Very silent pump, suitable for an installation in any room.



Compact tank pump

The SUNNY FLOWWATCH® DUO offers the best tank capacity/pump size of the market.



IPX4 protection

Protected against water splashes.



Removable integrated filter

Prevent dust and particles to damage the pump. Easy to remove and to clean.



Mounting brackets

Thanks to its mounting brackets (and screws and rawplugs supplied), pump can be easily fixed to the wall.



Inlet adapter included

This adapter allows condensate to enter the pump via tubes of different diameters.



CONTENTS

Pump - Inlet tube - Screws and rawplugs

Pump accessories

Discover the range of accessories for SICCOM pumps, allowing easy installation and maintenance.




SICCOM



Connection extension kit
(extension cable 2m + suction tube 2m)
Ref: GC1KCTC710

This kit, coupled with a FLOWATCH® DESIGN, allows to move the pump in a false ceiling, and so:

- **REDUCE THE NOISE LEVEL**
- **FREEING UP SPACE IN THE DUCT**

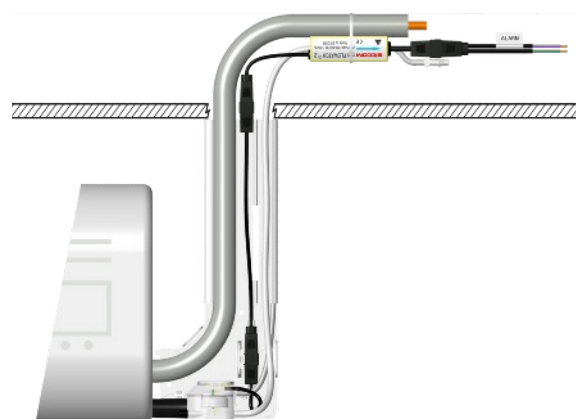

Patented foam casing
and fixing accessories for
mini FLOWATCH® 2

Kit COMFORT
Ref: GC077G1027



Reduces the noise level and
facilitate the installation of
mini FLOWATCH® 2

Kit Silence
Ref: GC1KFX2010



The Stop Siphoning prevents the
phenomenon of negative
discharge on any
installation.

Stop Siphoning
Ref: GC092A1001 (sachet de 10)
GC092A1002 (1 pièce)




Replacement reservoir for
FLOWATCH® DESIGN

Short cable reservoir + air vent tube
Ref: GCDS3BTF4180



Replacement reservoir for
mini FLOWATCH® 2

Long cable reservoir + air vent tube
Ref: GCDS3BTF4650

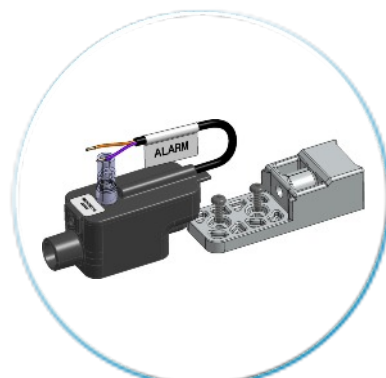

Alarm kit ECO pumps
Ref: DS1HTCC110



Bending tube Øint. 15mm
Ref: GC025D1017



Inlet adapter
FLOWATCH® TANK
Ref: GC078H2008



Inlet adapter
SUNNY FLOWATCH®
Ref: GC078H2007



Check valve
FLOWATCH® TANK
Ref: 91A1006

Sensors

SICCOM also manufactures level and proximity sensors. Discover a part of our range below, and do not hesitate to contact us for further information.

Vertical sensors



DG series
Standard



DP series
Compact



DK series



DX series
Stainless steel



DY series
Detection by microswitches

Horizontal sensors



DHN series
Threaded fixing



DHG series
Seal compression fixing



DHM series
Nut fixing



DXN series
Stainless steel

Specific sensors



DC series
Multi-level
resistive rod



DB series
Suction cane with
level detector



DD series
Resistive probe



DP series
Proximity sensors



OEM series
On-demand products



Find more informations
on our website

Sensors for all your applications



and the medical, food, hydrocarbon, transportation, automotive industries...



StrutFoot

Condensate removal pumps

SICCOM is established all across the world.

As an international manufacturer, we are committed to product quality and reliability.

Listening, communication and service are the three key values for our customer approach.

We will be delighted to provide further information, so please
CONTACT US.



+44 (0) 1283 512513



info@pumps2go.co.uk



www.pumps2go.co.uk