

Independent transformer **5** step speed controller for fans with off position

Supply: **230 VAC**, **50/60** Hz, **1** Phase

IP54 Ingress protection

Switch: **5** positions with off position

Indicator light


Current fuse

230 VAC unregulated output


Ready mounted cable glands

Enclosure: plastic (R-**ABS**, UL**94**-Vo, Grey **RAL 7035**) or sheet steel (**RAL 7035**)


Max ambient temperature, **50°C**

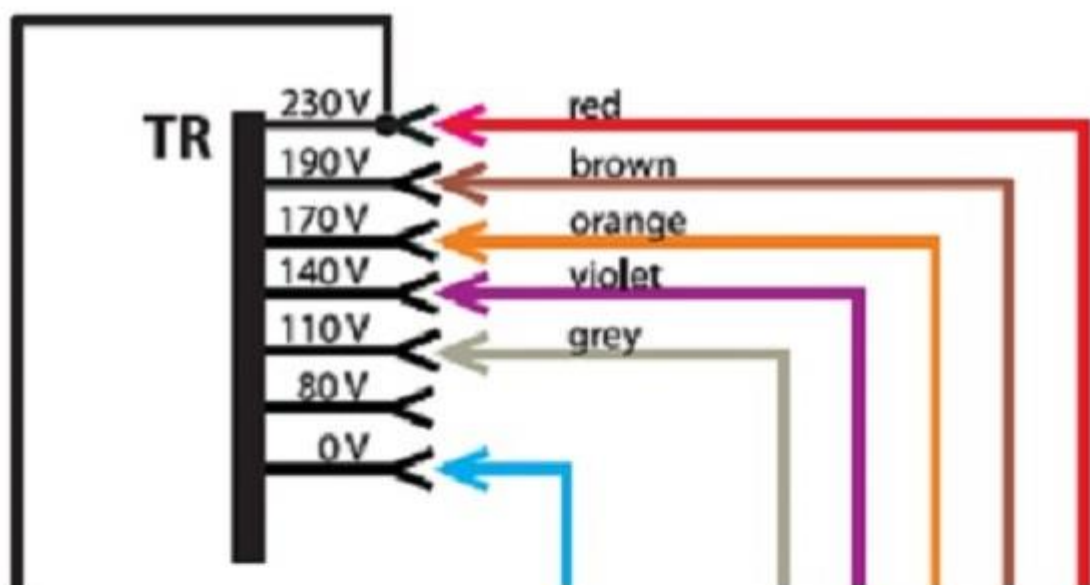

TEID1A

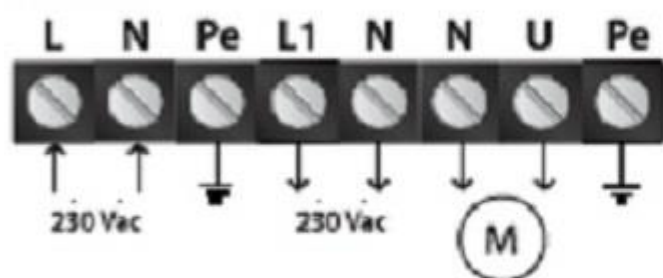




TEID1.5A-2.2A

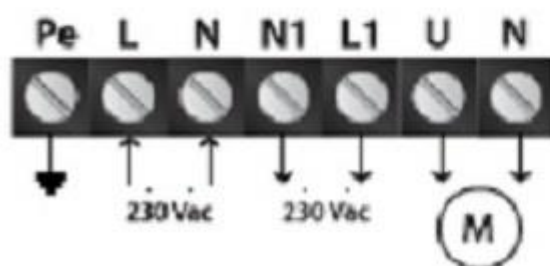

TEID3.5A-13A



DIMENSIONS AND WEIGHTS

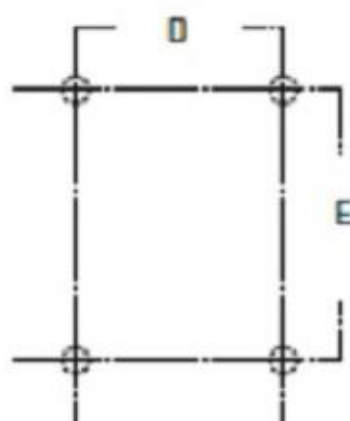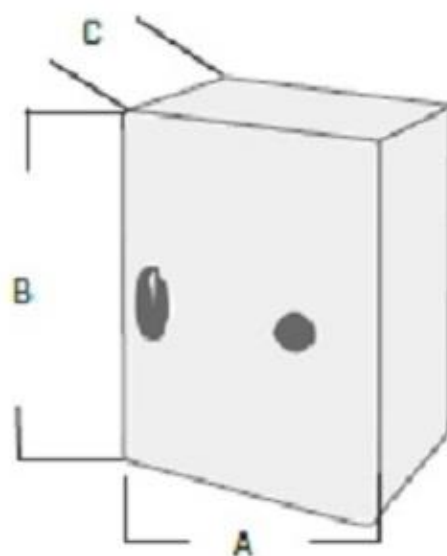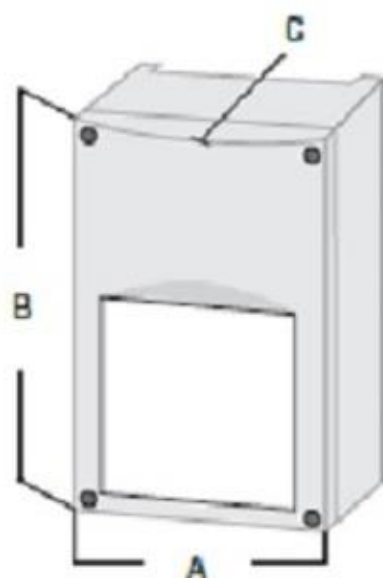

Model	A	B	C	D	E	Net kg	Gross kg	Enclosure
TEIO1A	84	160	88	71	108	1.2	1.3	Plastic
TEIO1.5A	115	205	100	98	140	1.9	2.1	Plastic
TEIO2.2A	115	205	100	98	140	2.1	2.3	Plastic
TEIO3.5A	170	255	140	155	194	4.5	4.7	Plastic
TEIO5A	170	255	140	155	194	5	5.4	Plastic
TEIO7.5A	200	305	140	183	236	7.6	8	Plastic
TEIO13A	300	365	195	255	255	14.8	15.3	Steel