




Performance curve AV 100

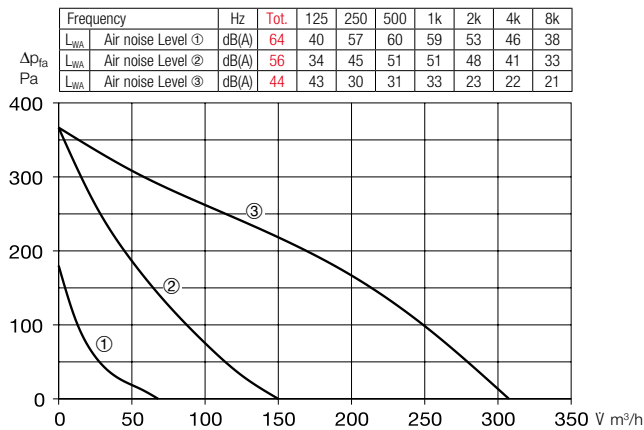


Performance curve AV 125

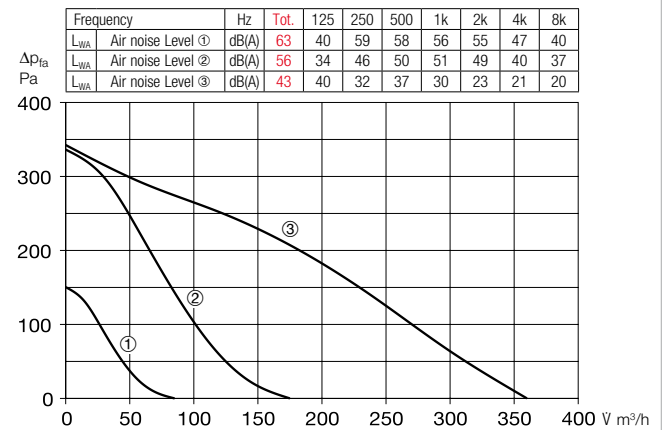

Performance curve AV 150

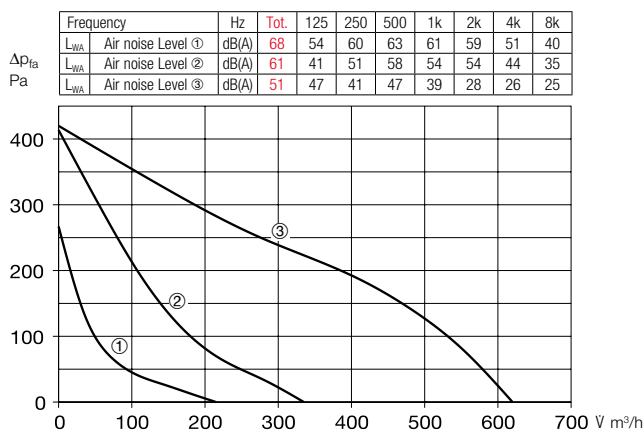

Performance curve AV 200

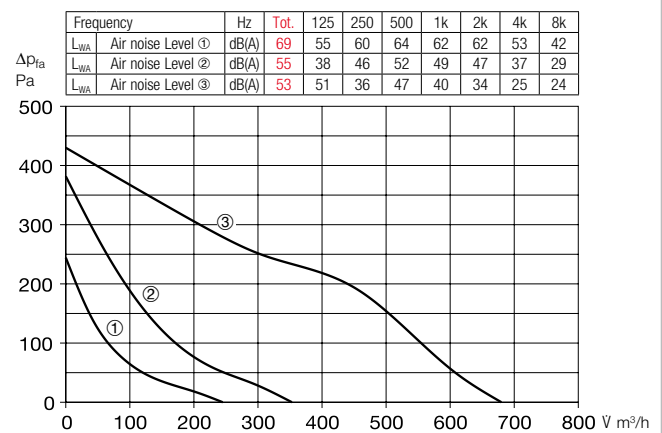

Accessories

Transformer speed controller

TSW 1.5 Ref. no. 01495

Five-step, for surface installation.

1~ alternating current, 230 V.

Max. load 1.5 A

Wiring diagram no. 1494

Dim. mm W 115 x H 205 x D 100



Electronic speed controller

ESU 1 Ref. no. 00236

For flush-mounted installation.

Front and rotary knob made of white plastic. Installation in standard flush-mounted box. Operation indicator via light ring.

Max. load 1 A

Minimum load 0.15 A

Protection category (built-in) IP30

Wiring diagram no. 556.1

Dim. mm W 80 x H 80 x D 21 protr.



Three-step speed and operating switch with 0 position

DSZ Ref. no. 01598

Convenient flush-mounted speed switch for fans with three performance levels. Room light cannot be switched in parallel. Can be used with central ventilation box ZEB EC.

Load capacity AC 3 / 2.2 kW, AC 15 / 6 A

Protection category IP 20

Install. in flush-m. box w/ 55 mm depth

Wiring diagram no. 735

Dimensions mm W 80 x H 80 x D 23



Electronic speed controller

ESA 1 Ref. no. 00238

For surface installation.

White plastic casing, operation indicator via light ring in rotary knob.

Max. load 1 A

Minimum load 0.15 A

Protection category IP40

Wiring diagram no. 556.1

Dimensions mm W 80 x H 80 x D 65



Electronic speed controller, contin. variable flush / surface-mounted		Speed controller, 3-step flush-mounted	
Type	Ref. no.	Type	Ref. no.
ESU 1/ESA 1	00236/00238	DSZ	01598
ESU 1/ESA 1	00236/00238	DSZ	01598
ESU 1/ESA 1	00236/00238	DSZ	01598
ESU 1/ESA 1	00236/00238	DSZ	01598