



Performance curves ALB EC 250 EH

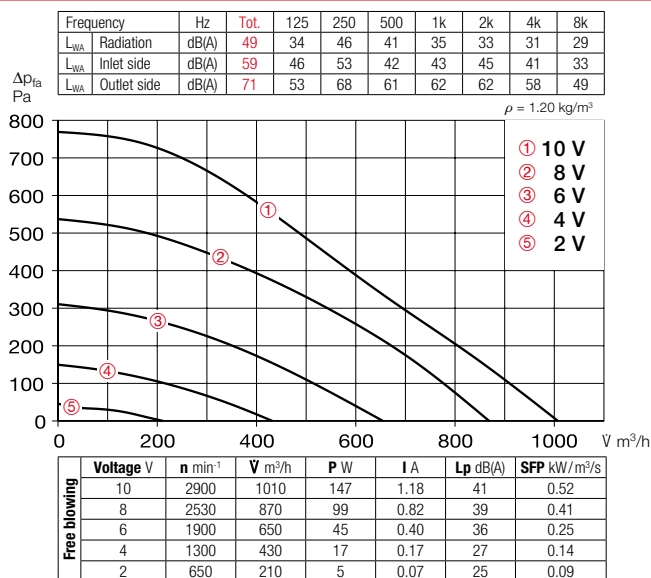

Reference

The integration of air filters ELF-ALB 125 F7 (ISO ePM₁ 50%) and differential pressure switches DDS (accessories) in outdoor installation fulfils the requirements of VDI 6022.

Reference

Planning information 14 ff.

Other accessories

Silencers 494 ff.
Flexible ventilation ducts, ventilation grilles, fittings, shutters, Supply air disc valves 584 f.

Accessories

Replacement and pollen filter

Large cassette filter for long cleaning intervals.

Unit = 3 pcs.

– Filter class ISO ePM_{2.5} 60% (M5)

ELF-ALB 250 M5 No. 07294

– Filter class ISO ePM₁ 50% (F7)

ELF-ALB 250 F7 No. 07305



Differential pressure switch

DDS Ref. no. 00445

Adjustable normally closed / normally open contact for monitoring drops in pressure.

Room sensor – Temperature

TFR-ALB Ref. no. 40000

Room temperature sensor for surface installation.

Temperature range 0 – 30 °C

Protection category IP20

Dim. mm W 86 x H 86 x D 30

Weight approx. 0.1 kg



Flexible cross talk silencer

FSD 250 Ref. no. 00680

For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs).

Pipe clamp connectors

BM 250 Ref. no. 05079

For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs).

Surface-mounted casing incl. frame

ALB-APG Ref. no. 00134

Casing for surface-mounting of control element.

Protection category IP20

Dim. mm W 85 x H 85 x D 48



Duct shutter

RSK 250 Ref. no. 05673

Automatic, casing made from galvanized steel.

External wall cover grille

G 250 Ref. no. 00256

Made of plastic, white. For covering and insertion in round ventilation openings.



Automatic duct shutter

RVS 250 Ref. no. 02592

With spring return, can be installed horizontally in any direction, vertically with throughflow from bottom to top. Shutter opening in flow direction; automatic function through fan operation.