



Performance curves ALB EC 125 EH

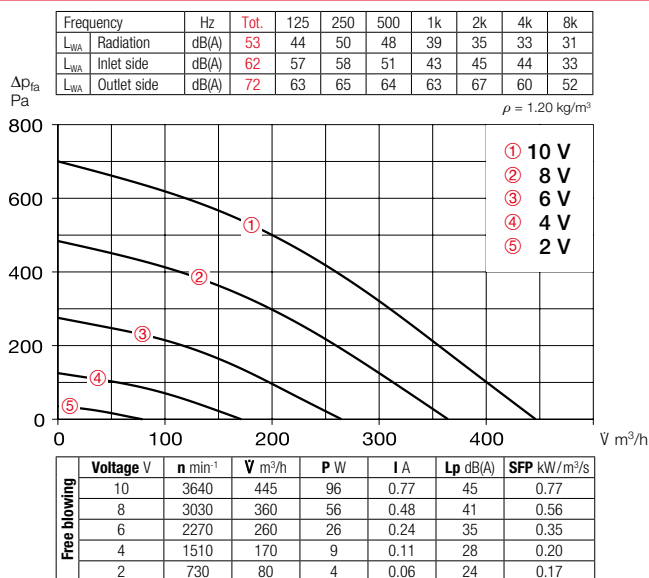

Reference

The integration of air filters ELF-ALB 125 F7 (ISO ePM₁ 50%) and differential pressure switches DDS (accessories) in outdoor installation fulfils the requirements of VDI 6022.

Reference

Planning information 14 ff.

Other accessories

Silencers 494 ff.
Flexible ventilation ducts, ventilation grilles, fittings, shutters, 584 f.
Supply air disc valves

Accessories

Replacement and pollen filter

Large cassette filter for long cleaning intervals.

Unit = 3 pcs.

– Filter class ISO ePM_{2.5} 60% (M5)

ELF-ALB 125 M5 No. 07231

– Filter class ISO ePM₁ 50% (F7)

ELF-ALB 125 F7 No. 07337



Differential pressure switch

DDS Ref. no. 00445

Adjustable normally closed / normally open contact for monitoring drops in pressure.

Room sensor – Temperature

TFR-ALB Ref. no. 40000

Room temperature sensor for surface installation.

Temperature range 0 – 30 °C

Protection category IP20

Dim. mm W 86 x H 86 x D 30

Weight approx. 0.1 kg



Flexible cross talk silencer

FSD 125 Ref. no. 00677

Made of aluminium pipe with double-sided plug-in connectors. Sound insulation lining 50 mm thick, installation length 1 m.

Pipe clamp connectors

BM 125 Ref. no. 05076

For structure-borne noise-free connection of fan and piping and for suspension (1 set = 2 pcs).

Surface-mounted casing incl. frame

ALB-APG Ref. no. 00134

Casing for surface-mounting of control element.

Protection category IP20

Dim. mm W 85 x H 85 x D 48



External wall cover grille

G 160 Ref. no. 00893

Made of plastic, white. For covering and insertion in round ventilation openings.

Duct shutter

RSKK 125 Ref. no. 05107

Automatic, made of plastic.

Plastic supply air disc valve

KTVZ 125 Ref. no. 02737

Made of plastic, for low and high flow velocities or resistances.



Metal supply air disc valve

MTVZ 125 Ref. no. 09605

Made of metal, for low and high flow velocities.