

EM DUO 200 EC 01

139972


ruck

- Efficient diagonal fan, redundant operation
- Optimally tuned and CFD-optimized aerodynamics
- Soundproof housing made of galvanized sheet steel
- High efficiency EC motor, steplessly controllable
- Built-in ETAMASTER with highest efficiency
- Conveyed medium temperature up to 40 °C in continuous operation



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

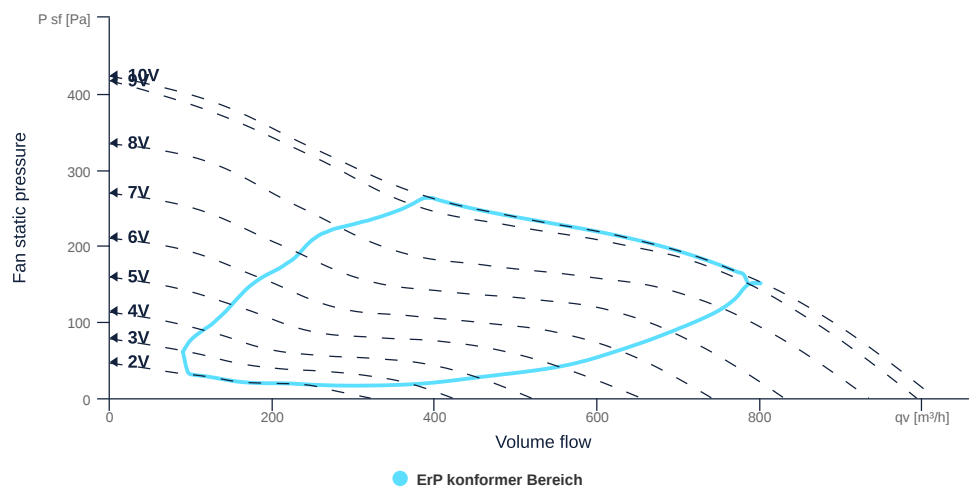

zur Produktseite

EM DUO 200 EC 01

139972



GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN200		DN



[zur Produktseite](#)

EM DUO 200 EC 01

139972

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
Weight	40	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	B		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	117	117	W	P _{ed, max}
Max. operating current (device)	0.99	0.99	A	I _{ed, max}
Max. speed	3150	3150	1/min	n _{max}
Max. stat. efficiency	33.2	33.2	%	η _{es}
Max. fan efficiency	36.4	36.4	%	η _e
Max. flowrate	1015	1015	m³/h	Q _{v, max}
Max. stat pressure	420	420	Pa	p _{sf, max}
Max. medium temperature	40	40	°C	T _{m, max}
Max. environment temperature	40	40	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}



zur Produktseite

EM DUO 200 EC 01

139972

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protect _{motor}
Protection class		IP54		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwr _{sup} _{motor}
Rated voltage	230	230	V	U _{rated, f1}
Rated current	0.93	0.93	A	I _{rated, f1}
Shaft power	121	121	W	P _{out, f1}
Speed	2929	2929	1/min	n _{f1}
Min. temperature	-30	-30	°C	T _{motor, min}
UL-Certification motor		None		UL _{cert}



ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2817	1/min	n _{opt}
Efficiency level	61.4	%	N
Efficiency category	total		catefficiency
Input power of the motor at the energy efficiency optimum	0.12	kW	P _{e, opt}
Overall efficiency	81.5	%	η _{ges}
Measurement category	B		meas cat
Fan pressure at energy efficiency optimum	273	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	849	m³/h	q _{v, opt}

zur Produktseite







SCHALTPLÄNE / MASSZEICHNUNGEN

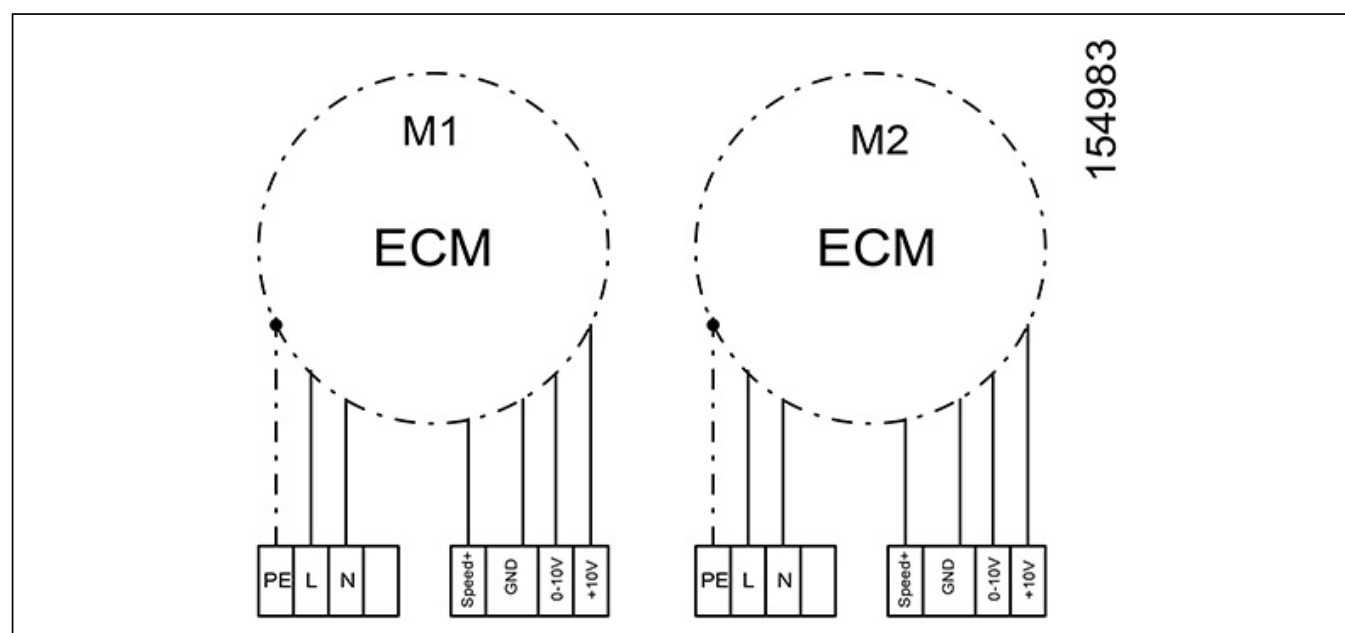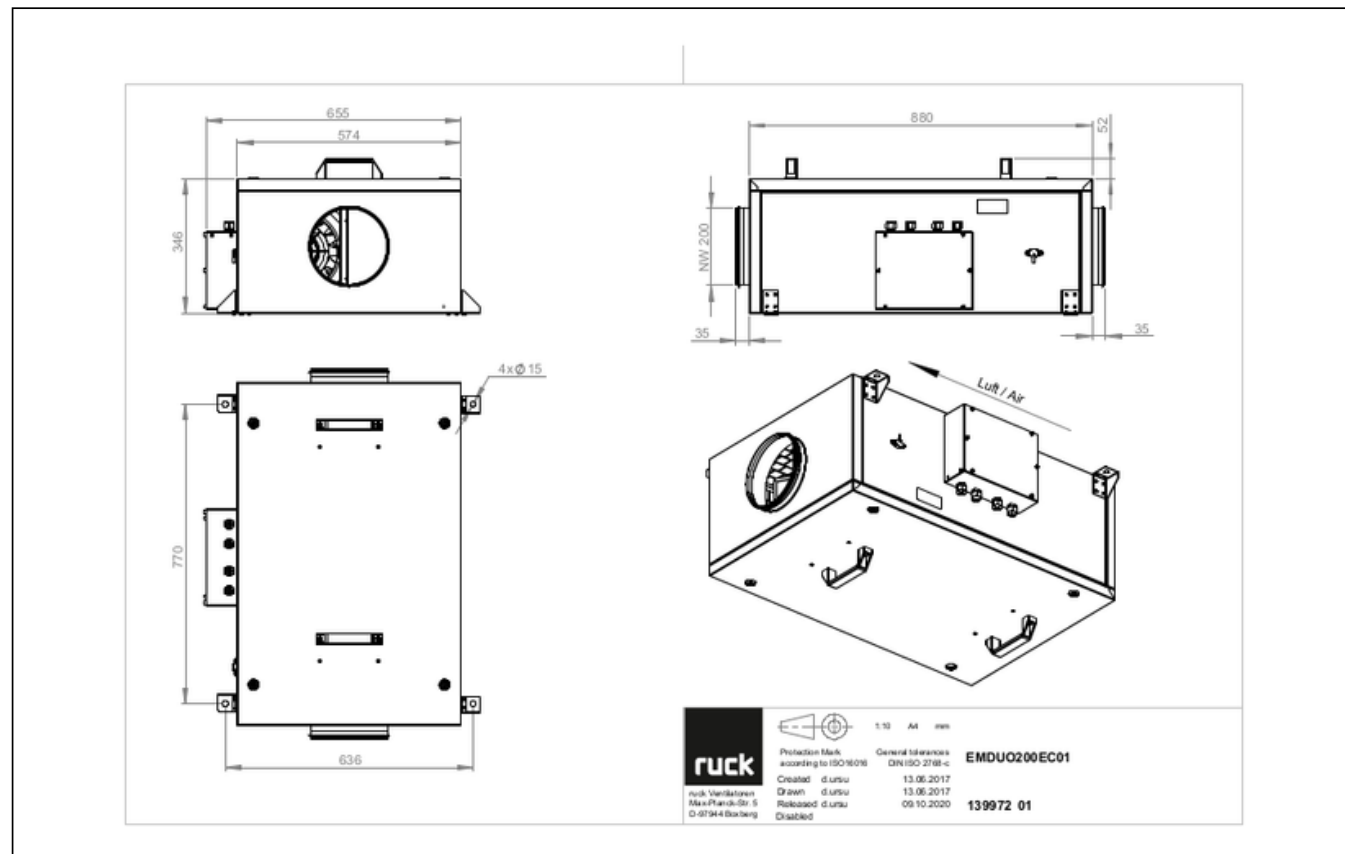

EM DUO 200 EC 01

139972

ruck

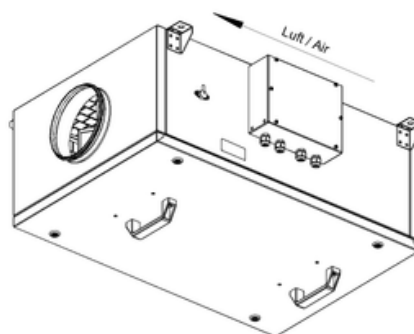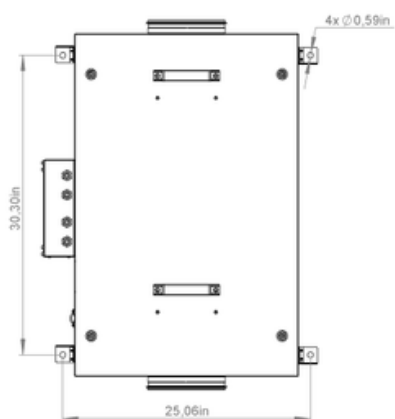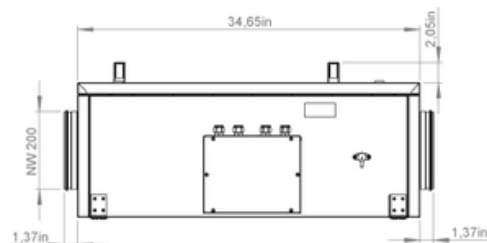

139972 01




zur Produktseite

EM DUO 200 EC 01

139972

ruck

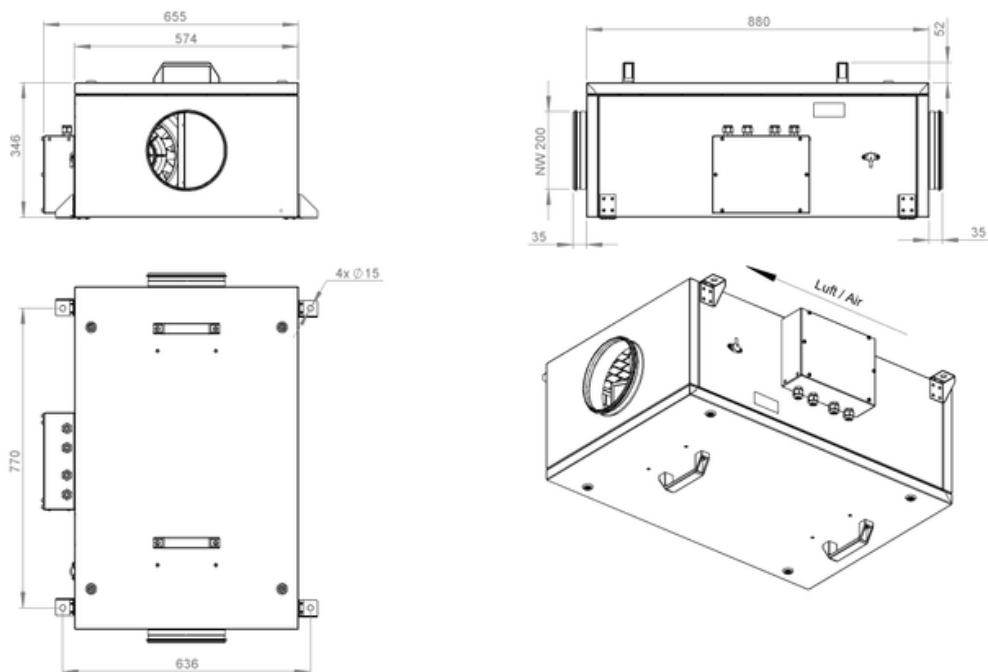

139972 01




zur Produktseite

EM DUO 200 EC 01

139972


ruck

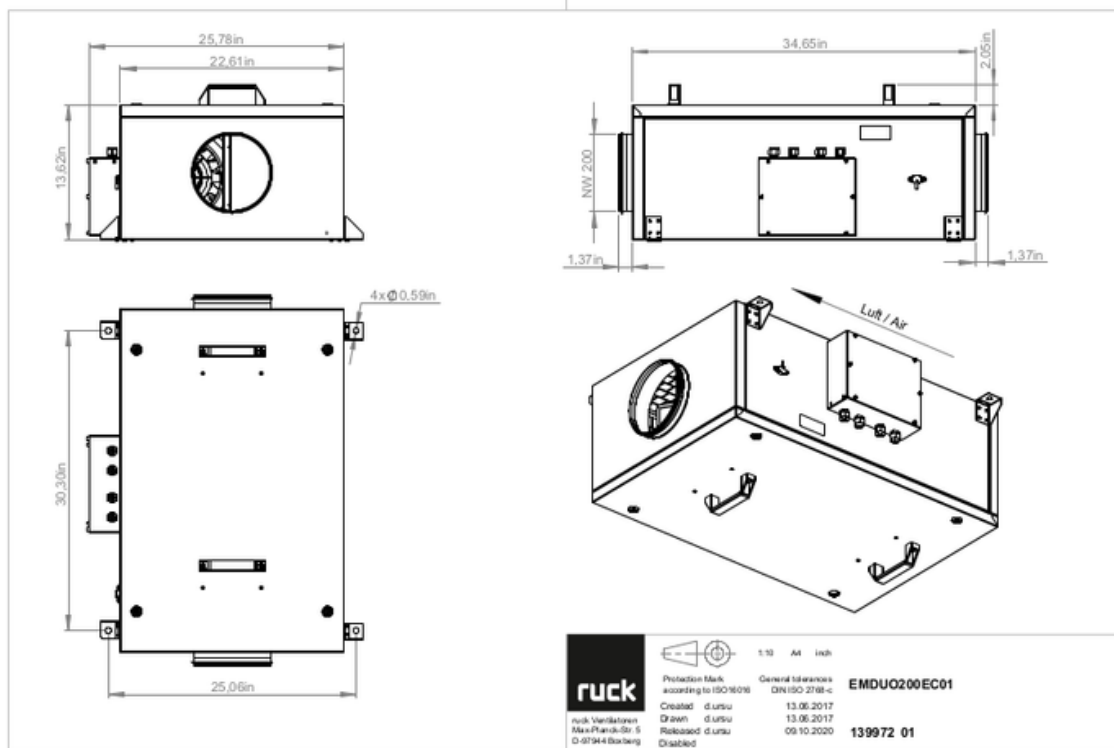

zur Produktseite

MECHANICAL ACCESSORIES

FV 200 | 112832



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 200 | 112840



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 200 | 112853



- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 200 | 102662



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

RSK 200D | 113487




- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

VM 200 | 102650



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

SG 200 01 | 102898



- Protection grille for tube connection
- Galvanized wire

SDS 200 | 102719



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

SDF 200 | 102704



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm



ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400 \text{ V}$, $I_{max} = 25 \text{ A}$
- Switching capacity $400 \text{ V } 3\sim = 5,5 \text{ kW}$
- Protection class IP 55

MTP 20 | 128146



- Potentiometer $10 \text{ k}\Omega$
- Switching contact $1\text{A}/250\text{V AC} - 2,5\text{A}/12\text{V DC}$
- Max. ambient temperature 50°C
- VDE

MTP 30 | 143289



- Stepped potentiometer $10 \text{ k}\Omega$
- Step 1 + 2 settable $10\% - 100\% \text{ Vdc}$
- Step 3 $100\% \text{ Vdc}$
- Supply voltage $+10 \text{ Vdc}$

MTP 40 | 147359



- Potentiometer $10 \text{ k}\Omega$
- Connection in terminal box
- Max. ambient temperature 50°C
- PU: 20 pieces

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output $0-10 \text{ V DC} + \text{FC enable} + \text{setpoint reached}$
- Pressure setting by means of decade switch

MTP 50 | 153133



- Potentiometer with multifunction output
- $230 \text{ VAC} \pm 10\% / 50-60 \text{ Hz}$
- Selectable output: $1-10 \text{ VDC} / 2-20 \text{ mA}$ / $10-100\% \text{ PWM}$
- Min. and max. output value adjustable



zur Produktseite