

EM DUO 250 EC 01

139973


ruck

- Efficient diagonal fan, redundant operation
- Optimally tuned and CFD-optimized aerodynamics
- Soundproof housing made of galvanized sheet steel
- High efficiency EC motor, steplessly controllable
- Built-in ETAMASTER with highest efficiency
- Conveyed medium temperature up to 40 °C in continuous operation



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

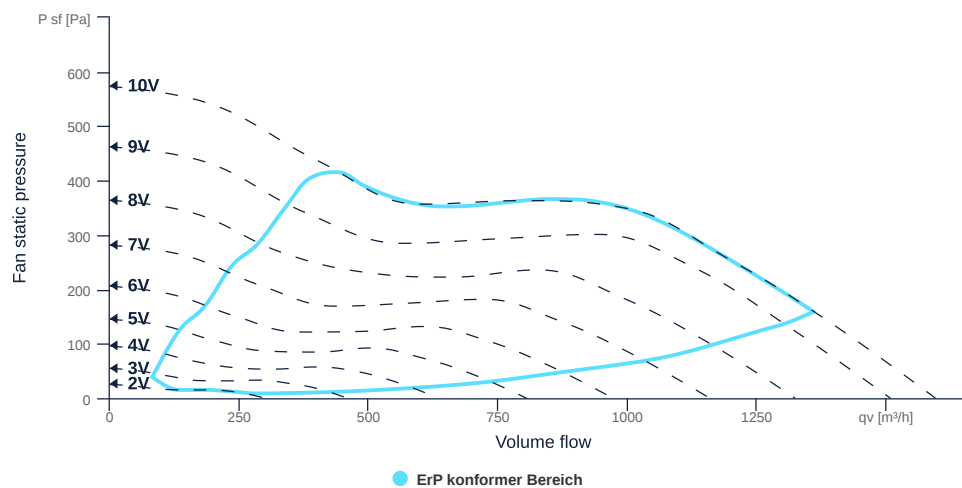

zur Produktseite

EM DUO 250 EC 01

139973



GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN250		DN



[zur Produktseite](#)

EM DUO 250 EC 01

139973

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
Weight	45	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	189	189	W	P _{ed, max}
Max. operating current (device)	1.6	1.6	A	I _{ed, max}
Max. speed	3390	3390	1/min	n _{max}
Max. stat. efficiency	48.6	48.6	%	η _{es}
Max. fan efficiency	51.2	51.2	%	η _e
Max. flowrate	1595	1595	m³/h	Q _{v, max}
Max. stat pressure	570	570	Pa	p _{sf, max}
Max. medium temperature	40	40	°C	T _{m, max}
Max. environment temperature	40	40	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}



zur Produktseite

EM DUO 250 EC 01

139973

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP30		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Rated voltage	230	230	V	U _{rated, f1}
Rated current	1.39	1.39	A	I _{rated, f1}
Shaft power	193	193	W	P _{out, f1}
Speed	3255	3255	1/min	n _{f1}
Min. temperature	-30	-30	°C	T _{motor, min}
UL-Certification motor		None		ULcert



ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	3110	1/min	n _{opt}
Efficiency level	67.3	%	N
Efficiency category	statisch		catefficiency
Input power of the motor at the energy efficiency optimum	0.17	kW	P _{e, opt}
Overall efficiency	85.8	%	η _{ges}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	338	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	1172	m³/h	q _{v, opt}

zur Produktseite




SCHALTPLÄNE / MASSZEICHNUNGEN

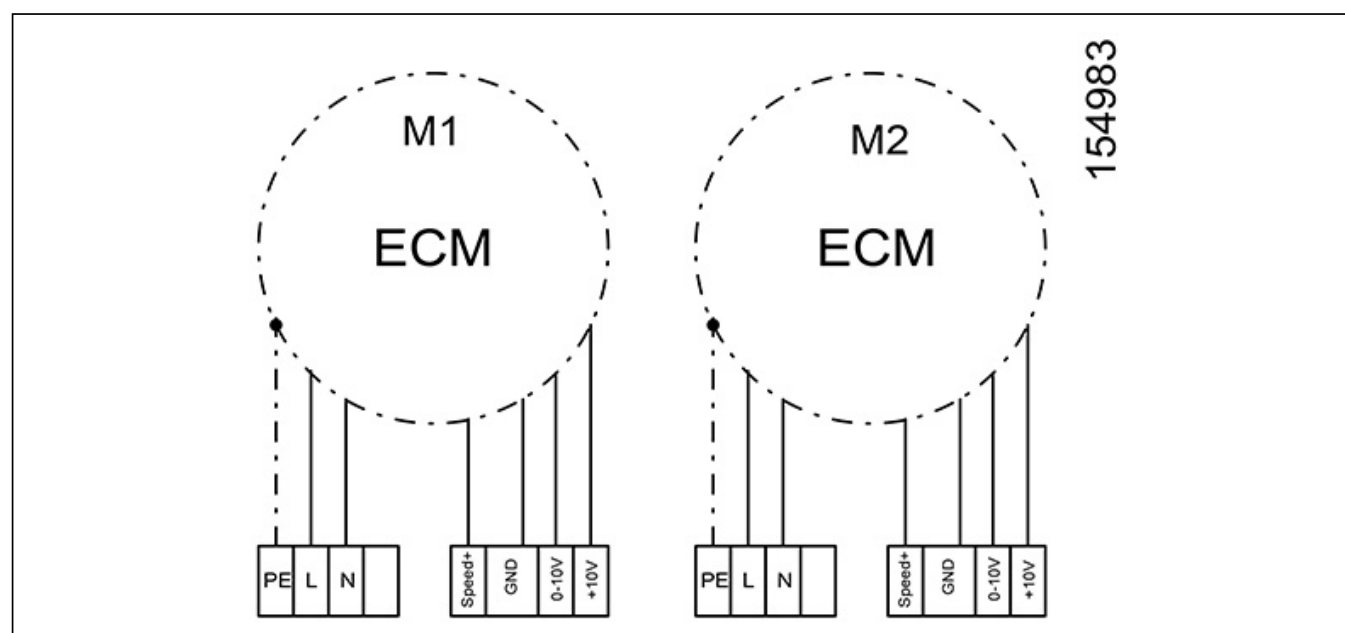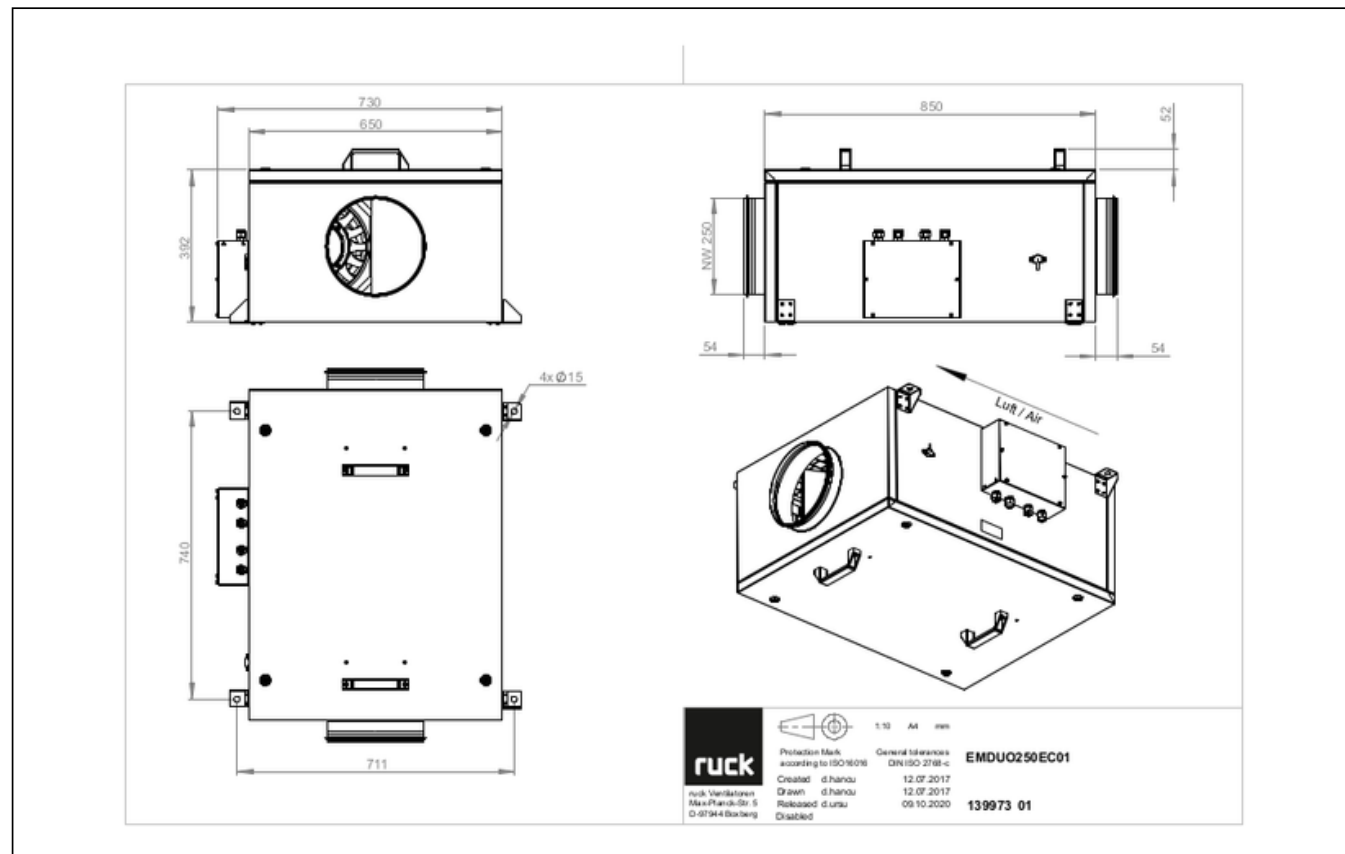

EM DUO 250 EC 01

139973

ruck

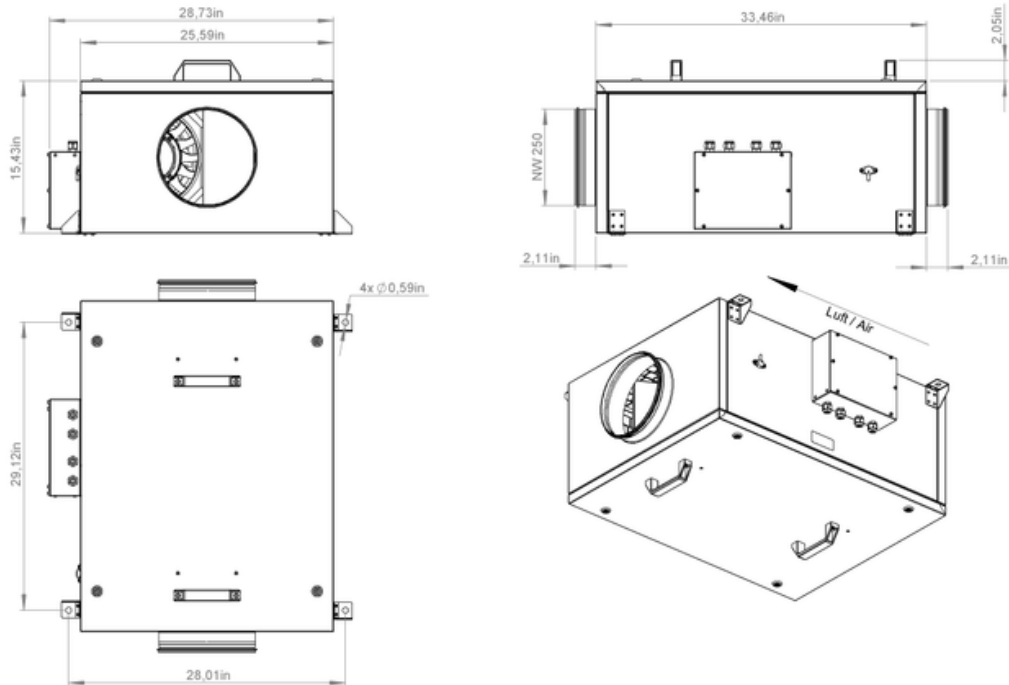

139973 01




zur Produktseite

EM DUO 250 EC 01

139973

ruck

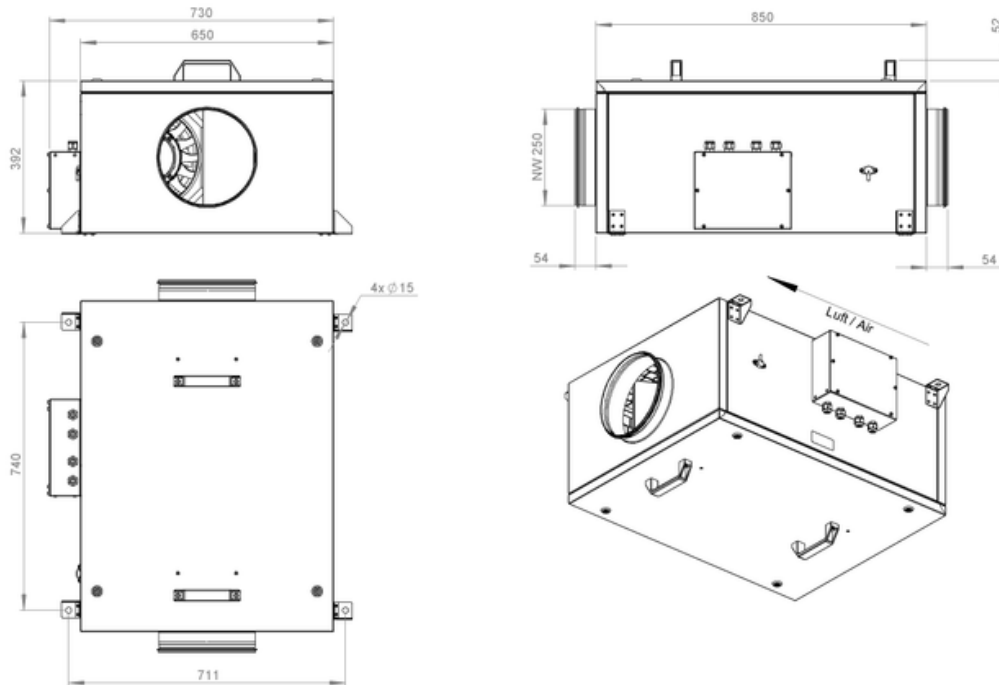

139973 01




zur Produktseite

EM DUO 250 EC 01

139973


ruck

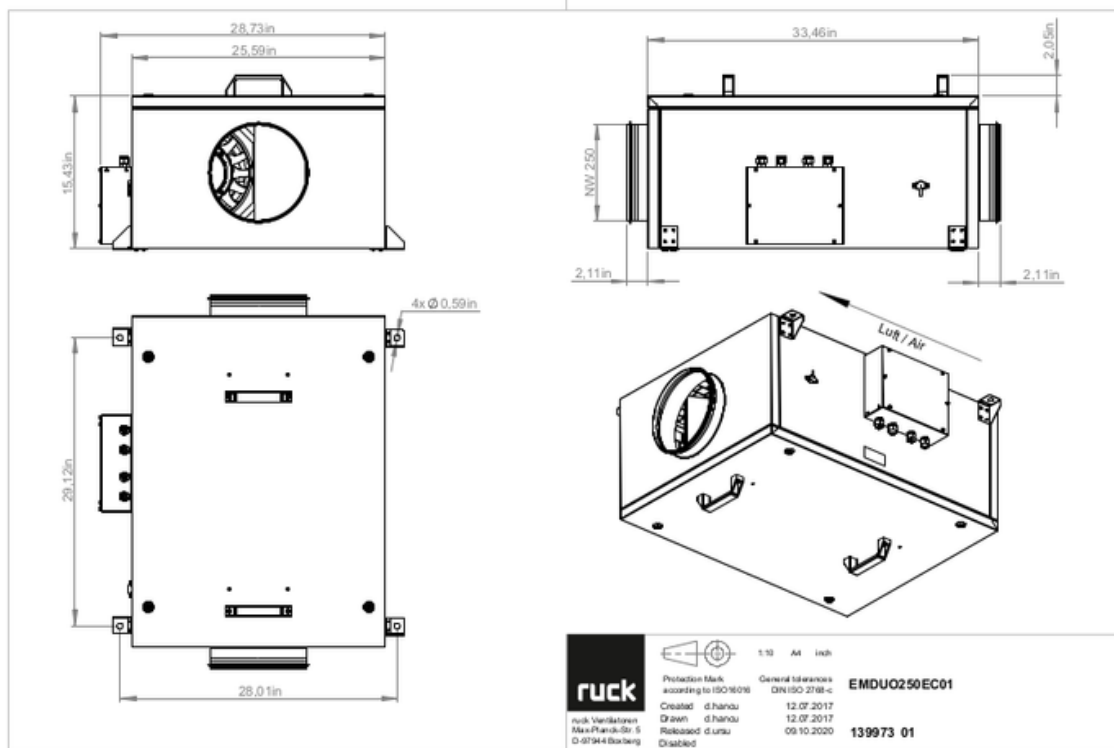

zur Produktseite


MECHANICAL ACCESSORIES

FV 250 | 112833




- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 250 | 112845



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 250 | 112854



- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 250D | 113488



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

VM 250 | 102651



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

KWR 250 02 | 124066



- Cold water cooler, uninsulated
- Version left
- Connection ND 250
- Galvanized steel sheet with condensate tray

DVR 250 01 | 126775




- Direct evaporator for reversing circuit
- Integrated condensate tray

DVR 250 02 | 126776



- Direct evaporator for reversing circuit
- Integrated condensate tray

SG 250 01 | 102899



- Protection grille for tube connection
- Galvanized wire

SDF 250 | 102705



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm

RSK 250 | 102686



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

SDS 250 | 102721



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)

KWR 250 01 | 124065



- Cold water cooler, uninsulated
- Version right
- Connection ND 250
- Galvanized steel sheet with condensate tray



ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400 \text{ V}$, $I_{max} = 25 \text{ A}$
- Switching capacity $400 \text{ V } 3\sim = 5,5 \text{ kW}$
- Protection class IP 55

MTP 20 | 128146



- Potentiometer $10 \text{ k}\Omega$
- Switching contact $1\text{A}/250\text{V AC} - 2,5\text{A}/12\text{V DC}$
- Max. ambient temperature 50°C
- VDE

MTP 30 | 143289



- Stepped potentiometer $10 \text{ k}\Omega$
- Step 1 + 2 settable $10\% - 100\% \text{ Vdc}$
- Step 3 $100\% \text{ Vdc}$
- Supply voltage $+10 \text{ Vdc}$

MTP 40 | 147359



- Potentiometer $10 \text{ k}\Omega$
- Connection in terminal box
- Max. ambient temperature 50°C
- PU: 20 pieces

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output $0-10 \text{ V DC} + \text{FC enable} + \text{setpoint reached}$
- Pressure setting by means of decade switch

MTP 50 | 153133



- Potentiometer with multifunction output
- $230 \text{ VAC} \pm 10\% / 50-60 \text{ Hz}$
- Selectable output: $1-10 \text{ VDC} / 2-20 \text{ mA}$ / $10-100\% \text{ PWM}$
- Min. and max. output value adjustable



zur Produktseite