

EM DUO 355 EC 01

139977


ruck

- Efficient diagonal fan, redundant operation
- Optimally tuned and CFD-optimized aerodynamics
- Soundproof housing made of galvanized sheet steel
- High efficiency EC motor, steplessly controllable
- Built-in ETAMASTER with highest efficiency
- Conveyed medium temperature up to 40 °C in continuous operation



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

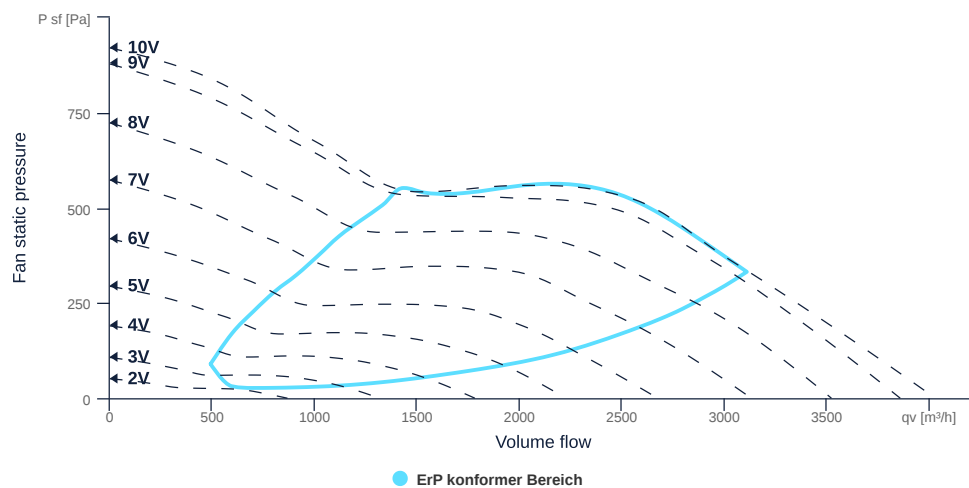

zur Produktseite



EM DUO 355 EC 01

139977



GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN355		DN



[zur Produktseite](#)

EM DUO 355 EC 01

139977

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Plastic		matimpeller
Weight	82	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	A		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	724	724	W	P _{ed, max}
Max. operating current (device)	3.36	3.36	A	I _{ed, max}
Max. speed	3010	3010	1/min	n _{max}
Max. stat. efficiency	48.4	48.4	%	η _{es}
Max. fan efficiency	51.4	51.4	%	η _e
Max. flowrate	4030	4030	m³/h	Q _{v, max}
Max. stat pressure	920	920	Pa	p _{sf, max}
Max. medium temperature	40	40	°C	T _{m, max}
Max. environment temperature	40	40	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}

zur Produktseite



EM DUO 355 EC 01

139977

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP20		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Rated voltage	230	230	V	U _{rated, f1}
Rated current	3.3	3.3	A	I _{rated, f1}
Shaft power	600	600	W	P _{out, f1}
Speed	2300	2300	1/min	n _{f1}
Min. temperature	-25	-25	°C	T _{motor, min}
UL-Certification motor		UL recognized		ULcert



ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2821	1/min	n _{opt}
Efficiency level	63.4	%	N
Efficiency category	statisch		catefficiency
Input power of the motor at the energy efficiency optimum	0.73	kW	P _{e, opt}
Overall efficiency	75.4	%	η _{ges}
Measurement category	A		meas cat
Fan pressure at energy efficiency optimum	550	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	2955	m³/h	q _{v, opt}

zur Produktseite




SCHALTPLÄNE / MASSZEICHNUNGEN

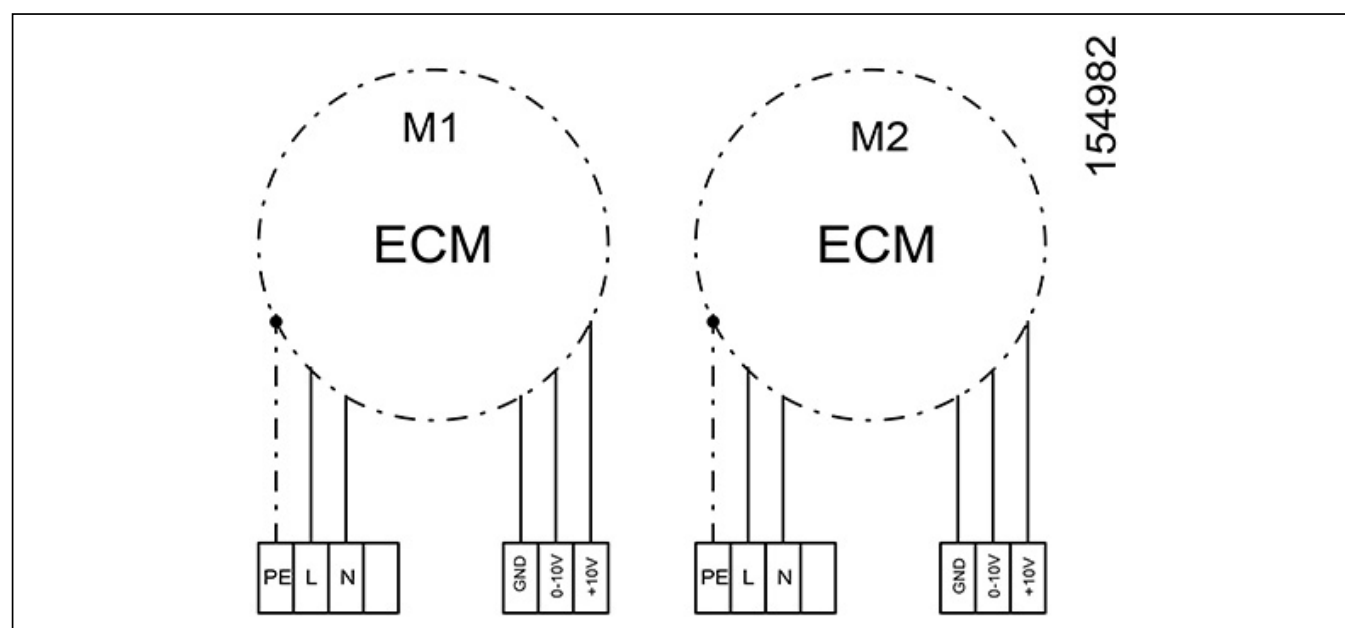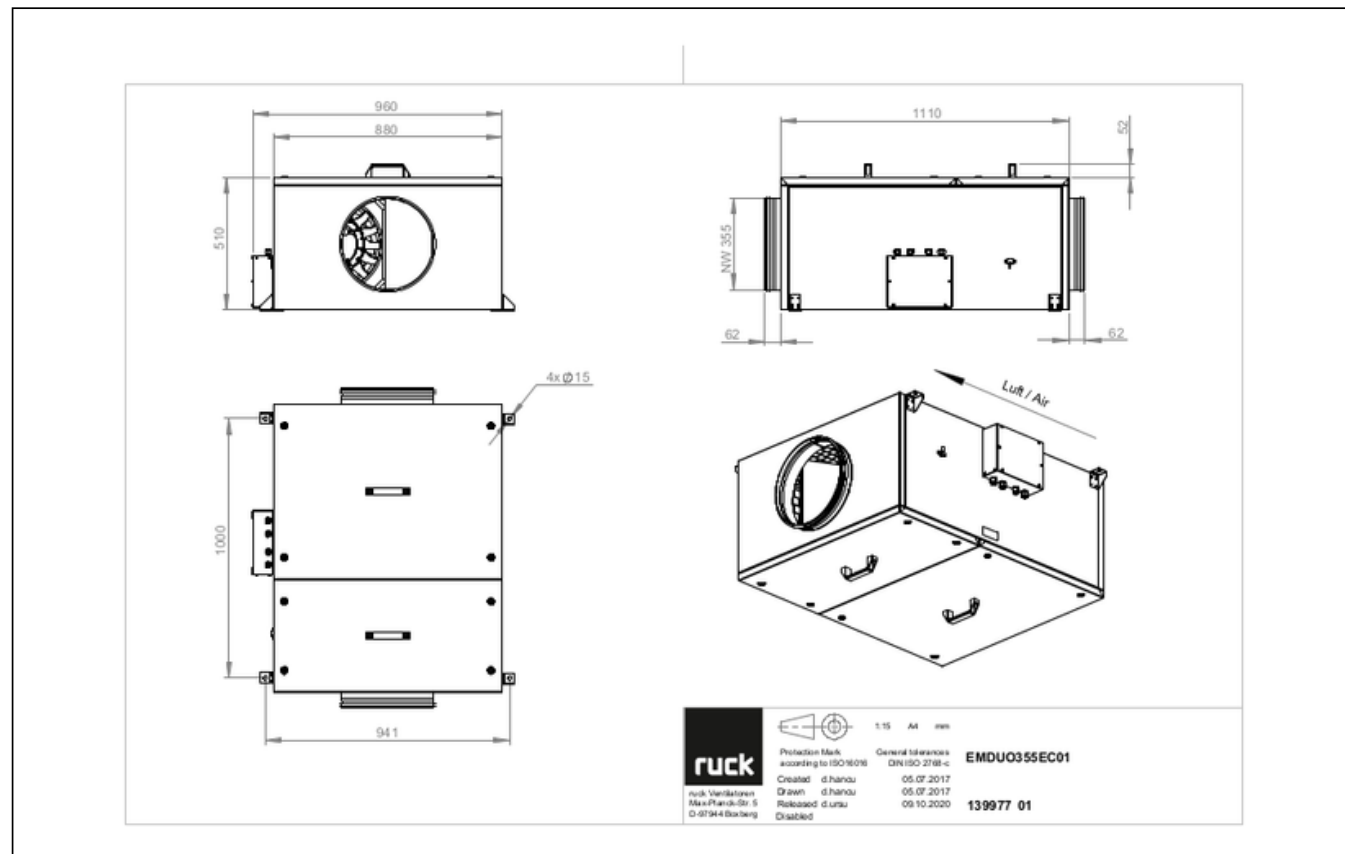

EM DUO 355 EC 01

139977

ruck

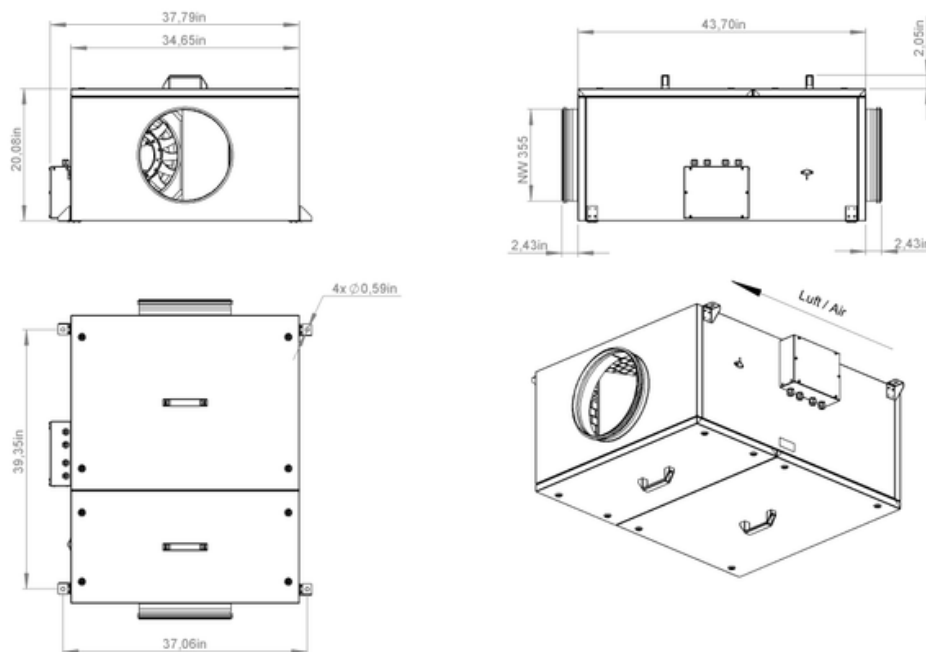

139977 01




zur Produktseite

EM DUO 355 EC 01

139977

ruck

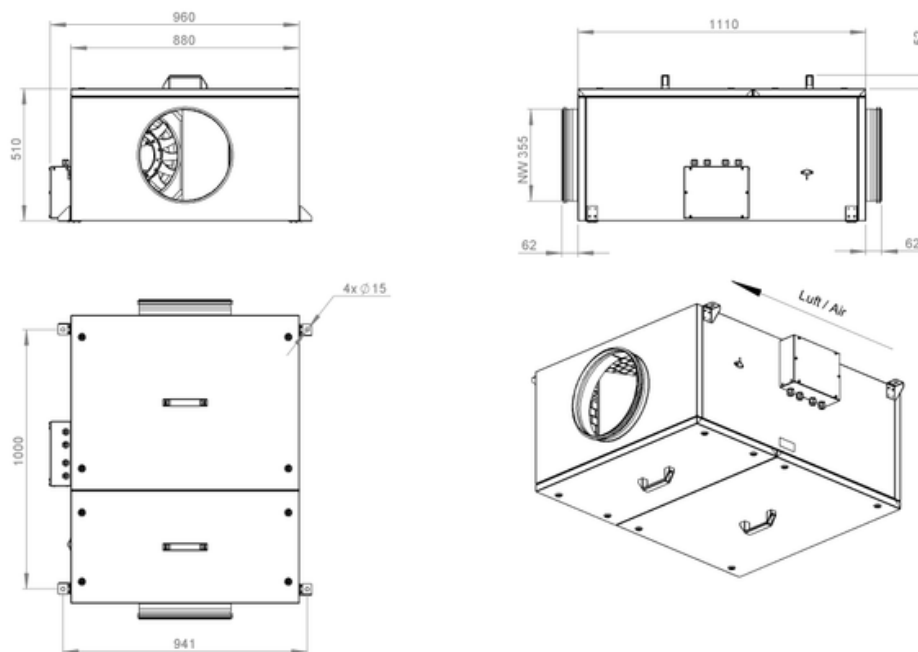

139977 01




zur Produktseite

EM DUO 355 EC 01

139977


ruck

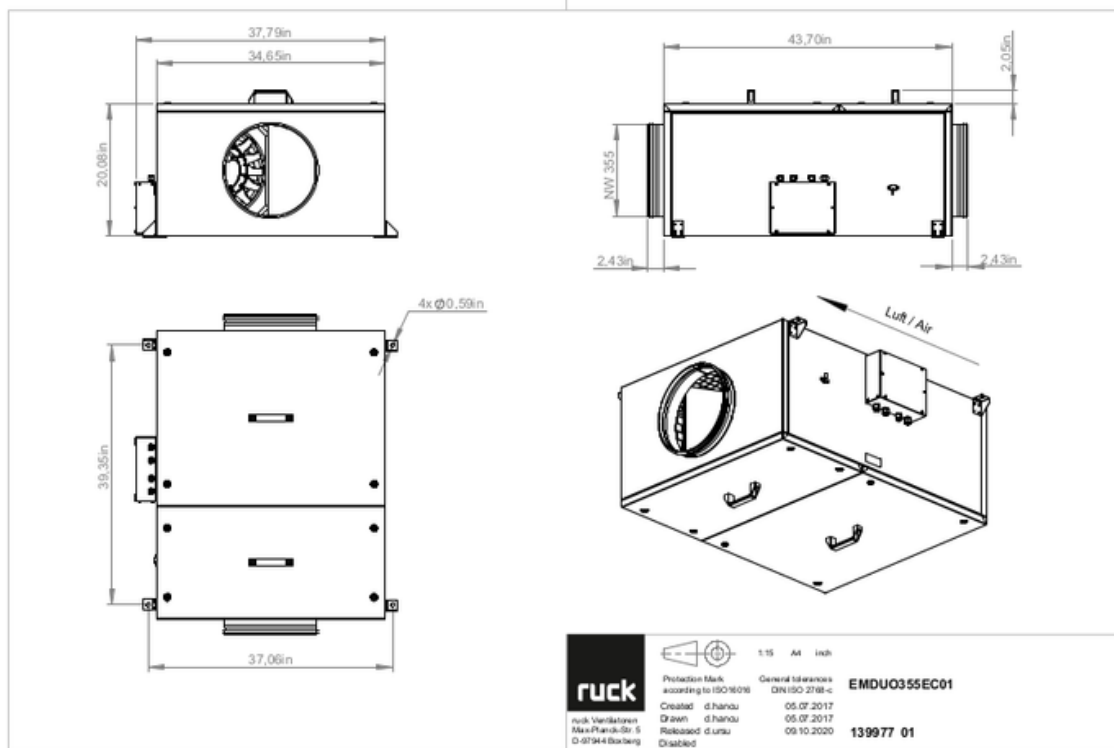

zur Produktseite

MECHANICAL ACCESSORIES

FV 355 | 112835



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 355 | 112847



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 355 | 112856



- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 355 | 102665



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

RSK 355D | 113491




- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

VM 355 | 102653



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

SG 355 01 | 102901



- Protection grille for tube connection
- Galvanized wire

SDF 355 | 102707



- Flexible tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm

SDS 355 | 102725



- Rigid tube silencer
- Galvanized steel sheet
- Sound insulation packing 50 mm (mineral wool)



ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400 \text{ V}$, $I_{max} = 25 \text{ A}$
- Switching capacity $400 \text{ V } 3\sim = 5,5 \text{ kW}$
- Protection class IP 55

MTP 20 | 128146



- Potentiometer $10 \text{ k}\Omega$
- Switching contact $1\text{A}/250\text{V AC}$ - $2,5\text{A}/12\text{V DC}$
- Max. ambient temperature 50°C
- VDE

MTP 30 | 143289



- Stepped potentiometer $10 \text{ k}\Omega$
- Step 1 + 2 settable $10\% - 100\% \text{ Vdc}$
- Step 3 $100\% \text{ Vdc}$
- Supply voltage $+10 \text{ Vdc}$

MTP 40 | 147359



- Potentiometer $10 \text{ k}\Omega$
- Connection in terminal box
- Max. ambient temperature 50°C
- PU: 20 pieces

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output $0-10 \text{ V DC}$ + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 50 | 153133



- Potentiometer with multifunction output
- $230 \text{ VAC} \pm 10\% / 50-60 \text{ Hz}$
- Selectable output: $1-10 \text{ VDC} / 2-20 \text{ mA}$ / $10-100\% \text{ PWM}$
- Min. and max. output value adjustable



zur Produktseite