


MPC 280 EC 40

157955


ruck

- Radial fan with backward curved impeller
- Variable discharge direction right / left / linear
- Double wall housing made of galvanized steel sheet, insulated
- Highly efficient EC motor, steplessly controllable
- Internal electronic temperature monitoring
- With bottom tray

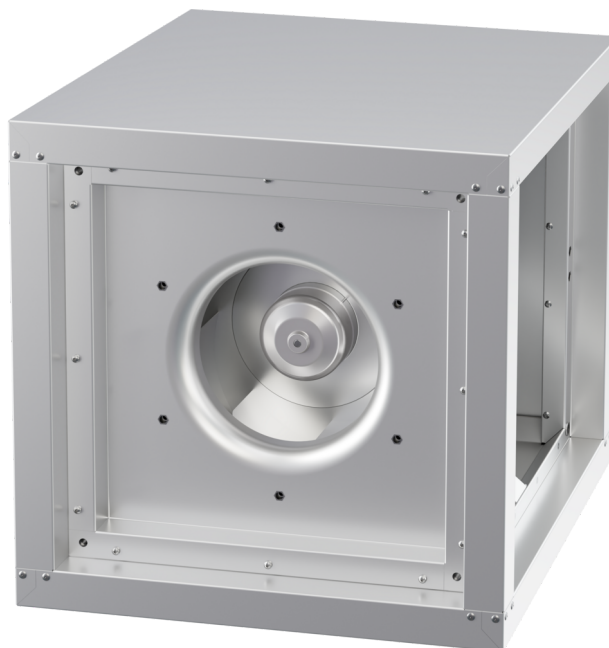

MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

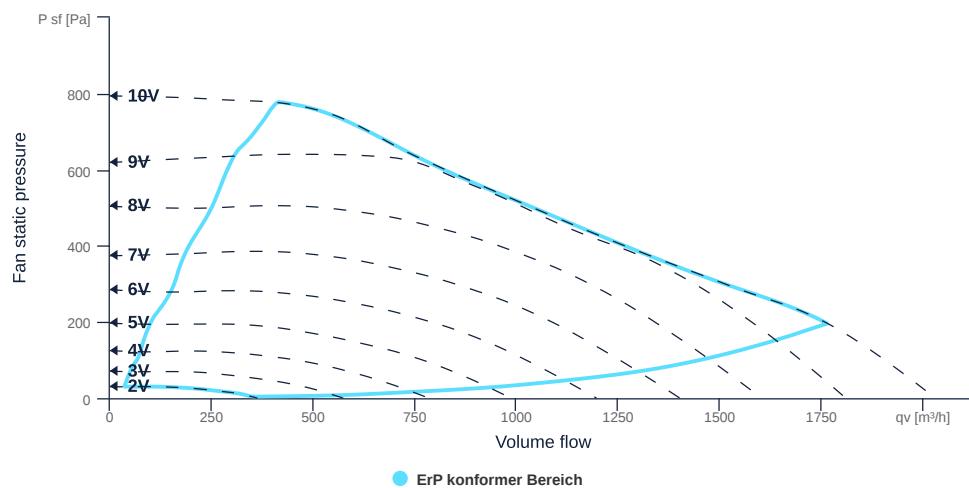

zur Produktseite

MPC 280 EC 40

157955

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Certifications	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN355		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		matcasing
Impeller material	Steel		matimpeller
IP-protection class (entire device)	IPX4		IPcompl
IP-Protection class (terminal box)	IP44		IPebox
Weight	29.1	kg	m
Nominal air flow rate, nominal point m³/h	1764	m³/h	q _{v,nom}
Nominal external pressure, static	196	Pa	p _{s,nom}
Fan type	Radial		Fantype
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.49	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.28	kW	P _{e,nom}
Face velocity, nominal point	3.63	m/s	V _{nom}
Nominal external pressure, static	196	Pa	p _{s,nom}
static efficiency of the extract fan, nominal point	34.14	%	η _{es,EHA}
Highest external air leakage rate	0.15	%	
Enclosure sound level, nominal point	61.47	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



zur Produktseite

MPC 280 EC 40

157955

ruck


MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	270	270	W	$P_{ed, max}$
Max. operating current (device)	1.91	1.91	A	$I_{ed, max}$
Max. speed	2900	2900	1/min	n_{max}
Max. stat. efficiency	51.2	51.2	%	η_{es}
Max. fan efficiency	51.4	51.4	%	η_e
Max. flowrate	2030	2030	m ³ /h	$Q_{v, max}$
Max. stat pressure	790	790	Pa	$p_{sf, max}$
Max. medium temperature	55	55	°C	$T_{m, max}$
Max. environment temperature	55	55	°C	$T_{amb, max}$
Min. environment temperature	-30	-30	°C	$T_{amb, min}$



zur Produktseite


SCHALTPLÄNE / MASSZEICHNUNGEN

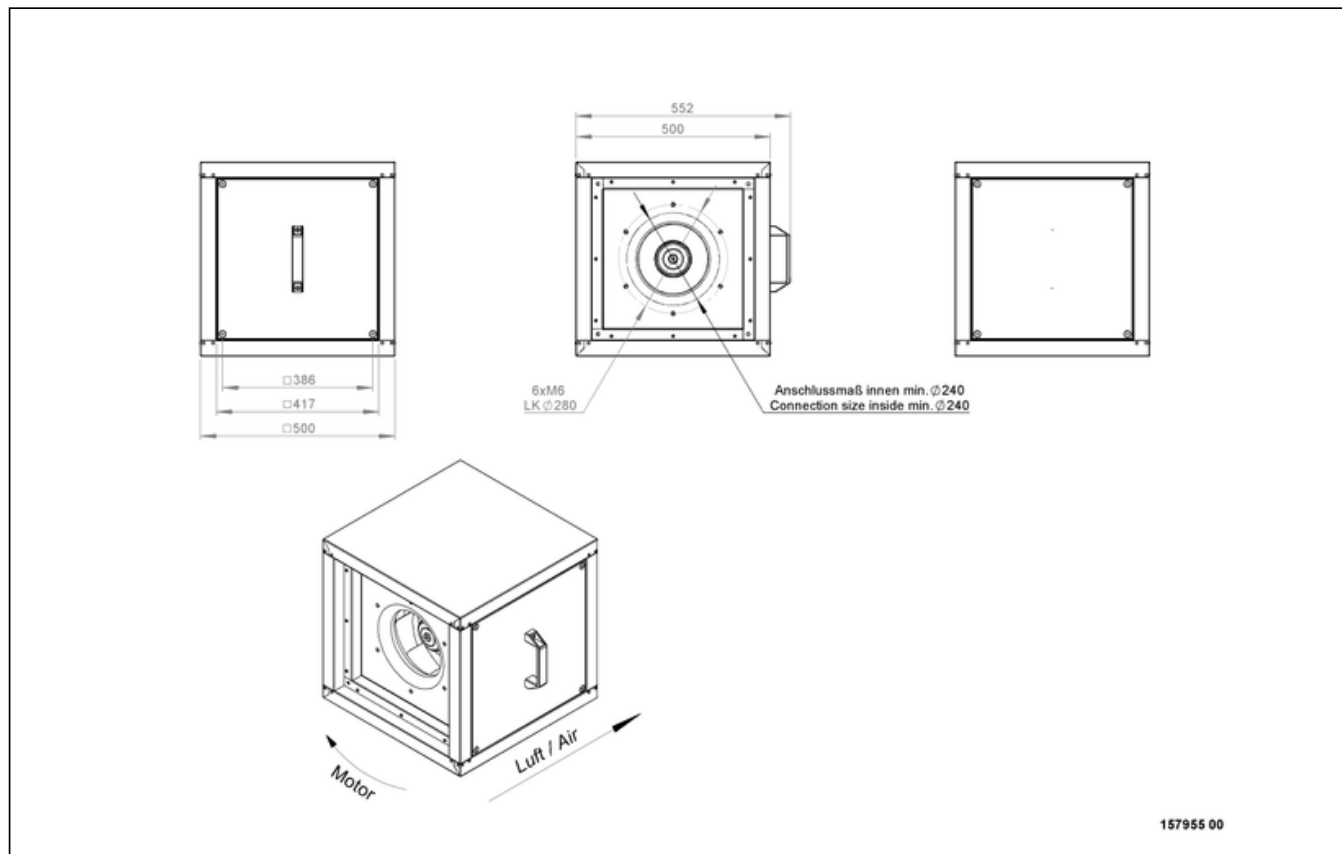

MPC 280 EC 40

157955

ruck

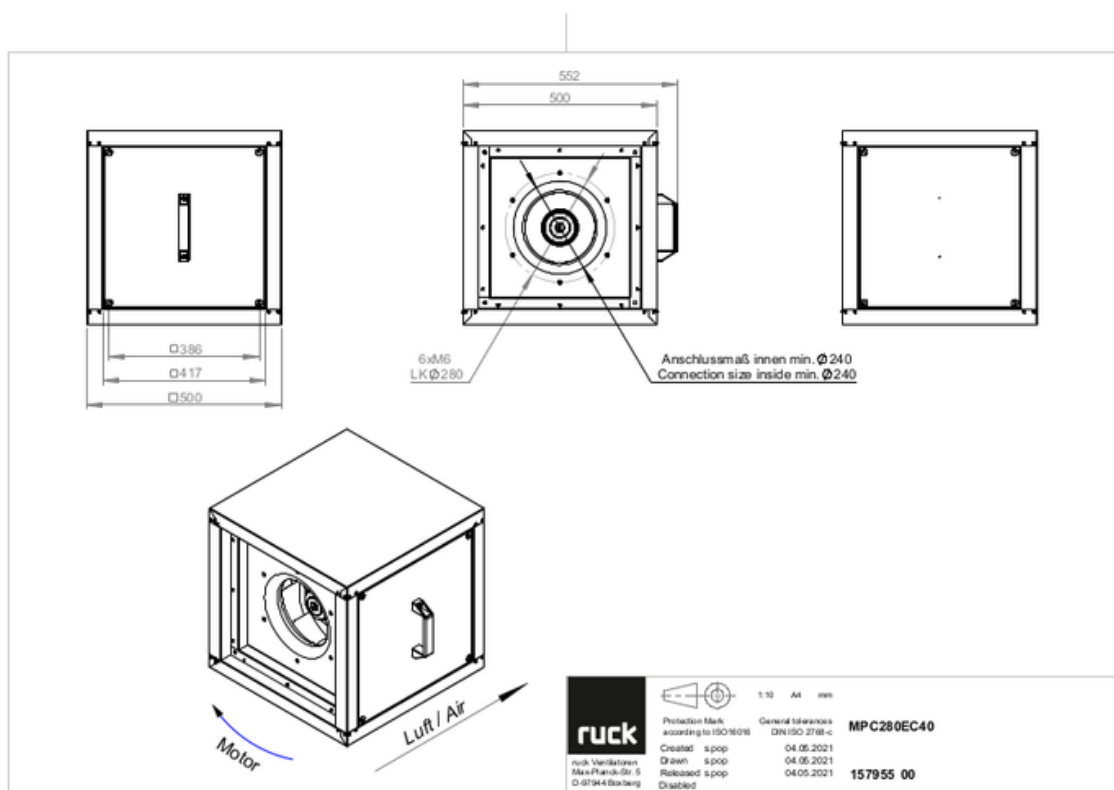


zur Produktseite

MPC 280 EC 40

157955

ruck

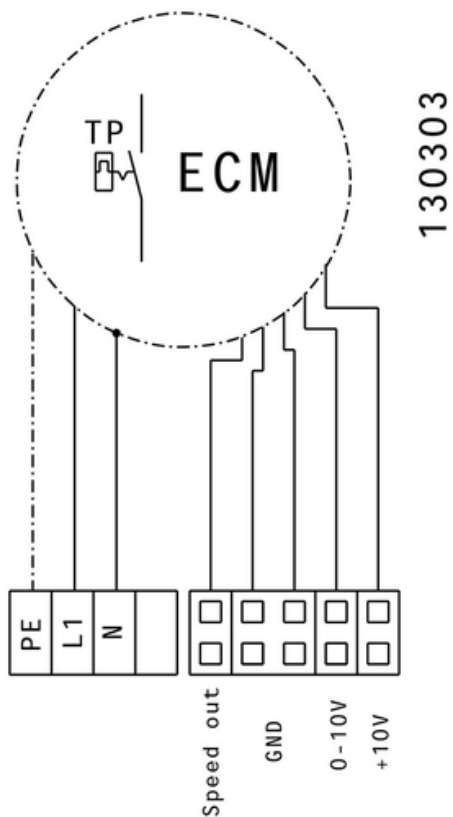


zur Produktseite

MPC 280 EC 40

157955

ruck

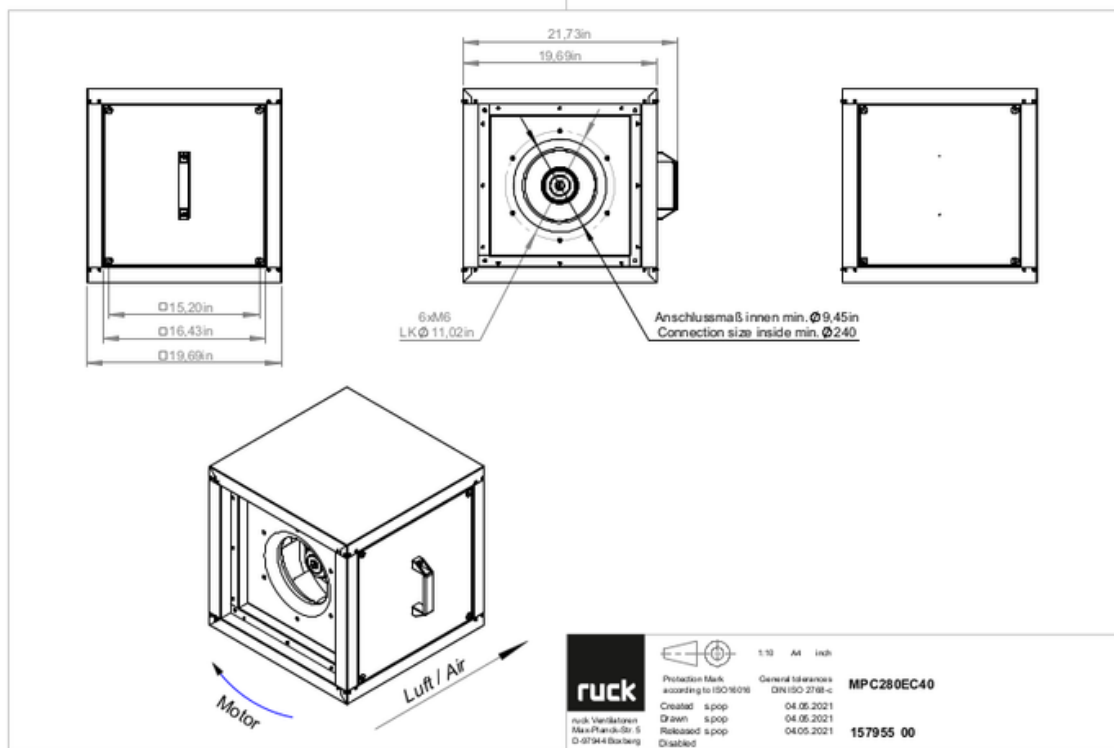


zur Produktseite

MPC 280 EC 40

157955

ruck

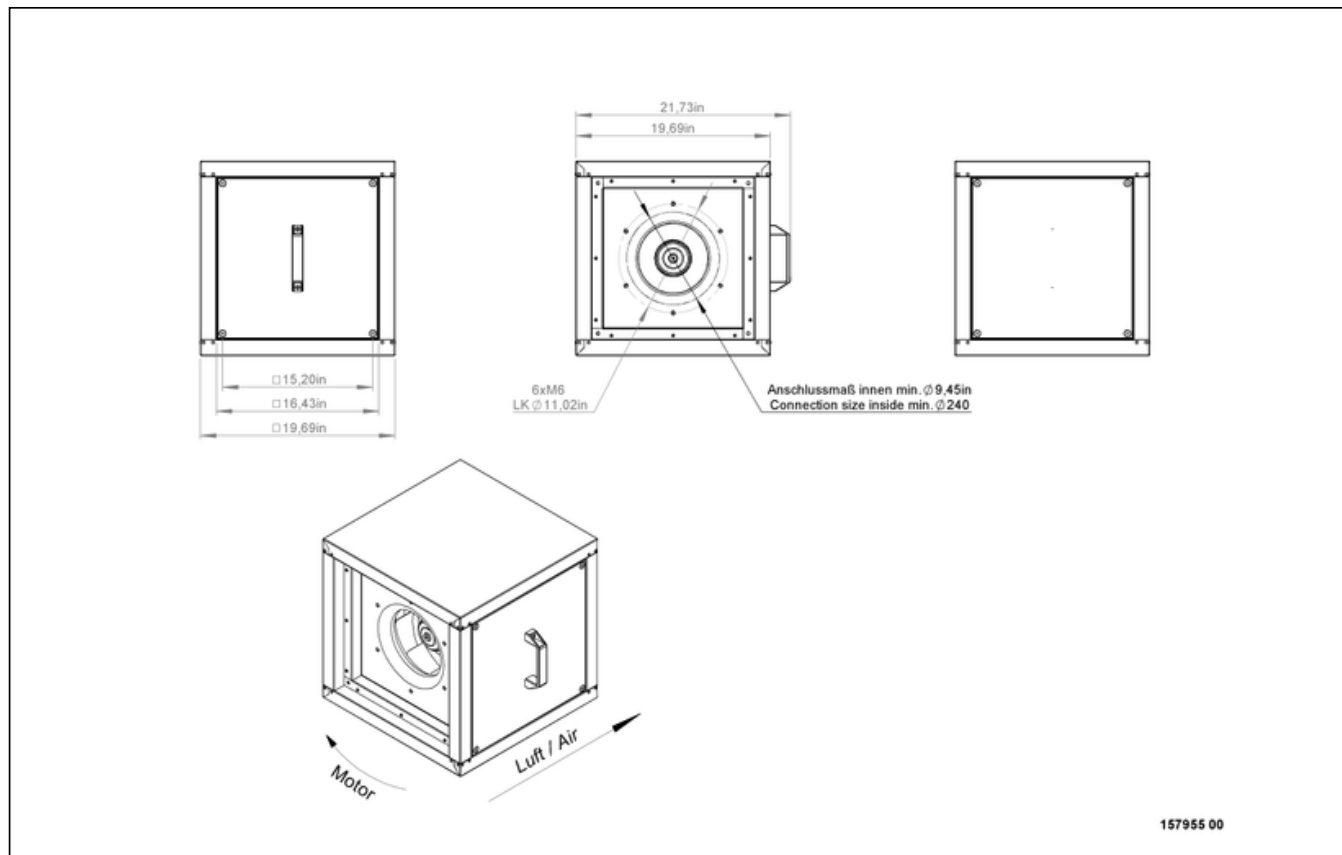

zur Produktseite

MECHANICAL ACCESSORIES

FB 500 | 160864



- Air filter box for panel filter
- For MPC box 500
- For 1 or 2 filter (not included)
- Housing made of galvanized sheet steel

USM 500 315 | 107181



- Transition spigot
- Galvanized steel sheet
- Insulated

USM 500 355 | 107182




- Transition spigot
- Galvanized steel sheet
- Insulated

GR MPC 01 | 123430



- Base frame für MPC
- Galvanized steel sheet

UCP 500 | 142567



- Closed panel
- Galvanized steel sheet

UQR 500 315 01 | 136201



- Transition duct/tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

UQR 500 250 01 | 136232



- Transition duct/tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

VM 250 | 102651



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

VM 355 | 102653



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

AS MPC 250 | 140836



- Inlet spigot
- Galvanized steel sheet

AS MPC 315 | 140844



- Inlet spigot
- Galvanized steel sheet

AS MPC 355 | 140956



- Inlet spigot
- Galvanized steel sheet

WSH MPC 01 | 123431



- Weather protection hood
- Galvanized steel sheet

WSG MPC 500 | 140741



- Weather protection grille
- Galvanized steel sheet

RD MPC 500 | 140073



- Rain cover for outdoor installation
- Galvanized steel sheet

VM 315 | 102652



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces



zur Produktseite

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400 \text{ V}$, $I_{max} = 25 \text{ A}$
- Switching capacity $400 \text{ V } 3\sim = 5,5 \text{ kW}$
- Protection class IP 55

MTP 20 | 128146



- Potentiometer $10 \text{ k}\Omega$
- Switching contact $1\text{A}/250\text{V AC} - 2,5\text{A}/12\text{V DC}$
- Max. ambient temperature $50 \text{ }^\circ\text{C}$
- VDE

MTP 30 | 143289



- Stepped potentiometer $10 \text{ k}\Omega$
- Step 1 + 2 settable $10\% - 100\% \text{ Vdc}$
- Step 3 $100\% \text{ Vdc}$
- Supply voltage $+10 \text{ Vdc}$

MTP 40 | 147359



- Potentiometer $10 \text{ k}\Omega$
- Connection in terminal box
- Max. ambient temperature $50 \text{ }^\circ\text{C}$
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature $0...+50 \text{ }^\circ\text{C}$
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output $0-10 \text{ V DC} + \text{FC enable} + \text{setpoint reached}$
- Pressure setting by means of decade switch

MTP 50 | 153133



- Potentiometer with multifunction output
- $230 \text{ VAC} \pm 10\% / 50-60 \text{ Hz}$
- Selectable output: $1-10 \text{ VDC} / 2-20 \text{ mA} / 10-100\% \text{ PWM}$
- Min. and max. output value adjustable

