


MPC 560 D4 40


157203

- Radial fan with backward curved impeller
- Variable discharge direction right / left / linear
- Double wall housing made of galvanized steel sheet, insulated
- Efficient IE3 motor, frequency controllable
- Motor protection via frequency converter or motor protection switch
- With bottom tray

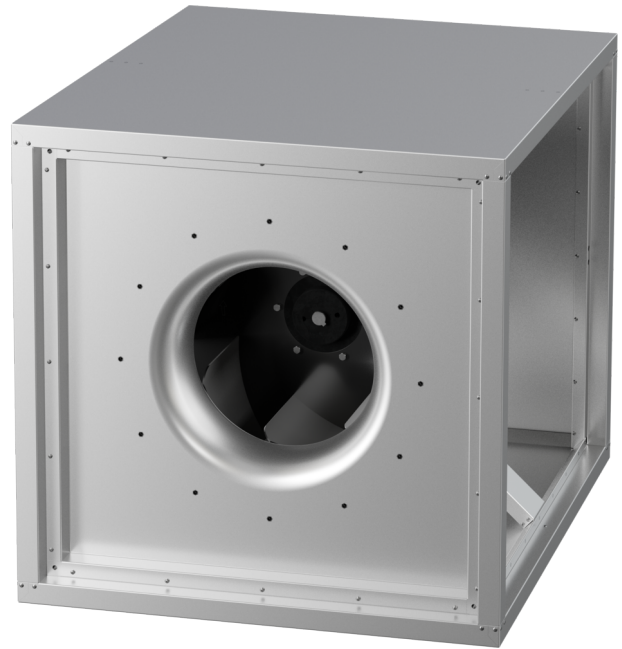

MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

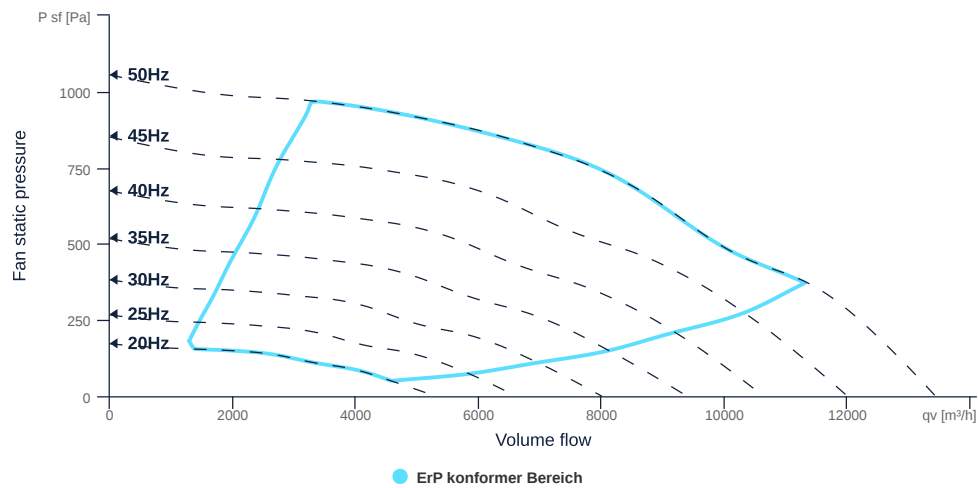

zur Produktseite

MPC 560 D4 40

157203

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Certifications	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN630		DN
Rated voltage (entire device)	400	V	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Steel		mat _{impeller}
Weight	134	kg	m
Nominal air flow rate, nominal point m³/h	8038.8	m³/h	q _{v,nom}
Nominal external pressure, static	735.7	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	2.23	m³/s	q _{v,nom}
Actual electrical input power, nominal point	2.69	kW	P _{e,nom}
Face velocity, nominal point	3.7	m/s	v _{nom}
Nominal external pressure, static	735.7	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	63.4	%	η _{es,SUP}
Enclosure sound level, nominal point	74	dB(A)	L _{WA2}
Rating	Product is compliant 2018		


MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	2688	W	P _{ed, max}
Max. operating current (device)	5.04	A	I _{ed, max}
Max. speed	1470	1/min	n _{max}
Max. stat. efficiency	57.5	%	η _{es}
Max. fan efficiency	58.1	%	η _e
Max. flowrate	13410	m³/h	q _{v, max}
Max. stat pressure	1050	Pa	p _{sf, max}
Max. medium temperature	60	°C	T _{m, max}
Max. environment temperature	60	°C	T _{amb, max}
Min. environment temperature	-20	°C	T _{amb, min}



zur Produktseite


SCHALTPLÄNE / MASSZEICHNUNGEN

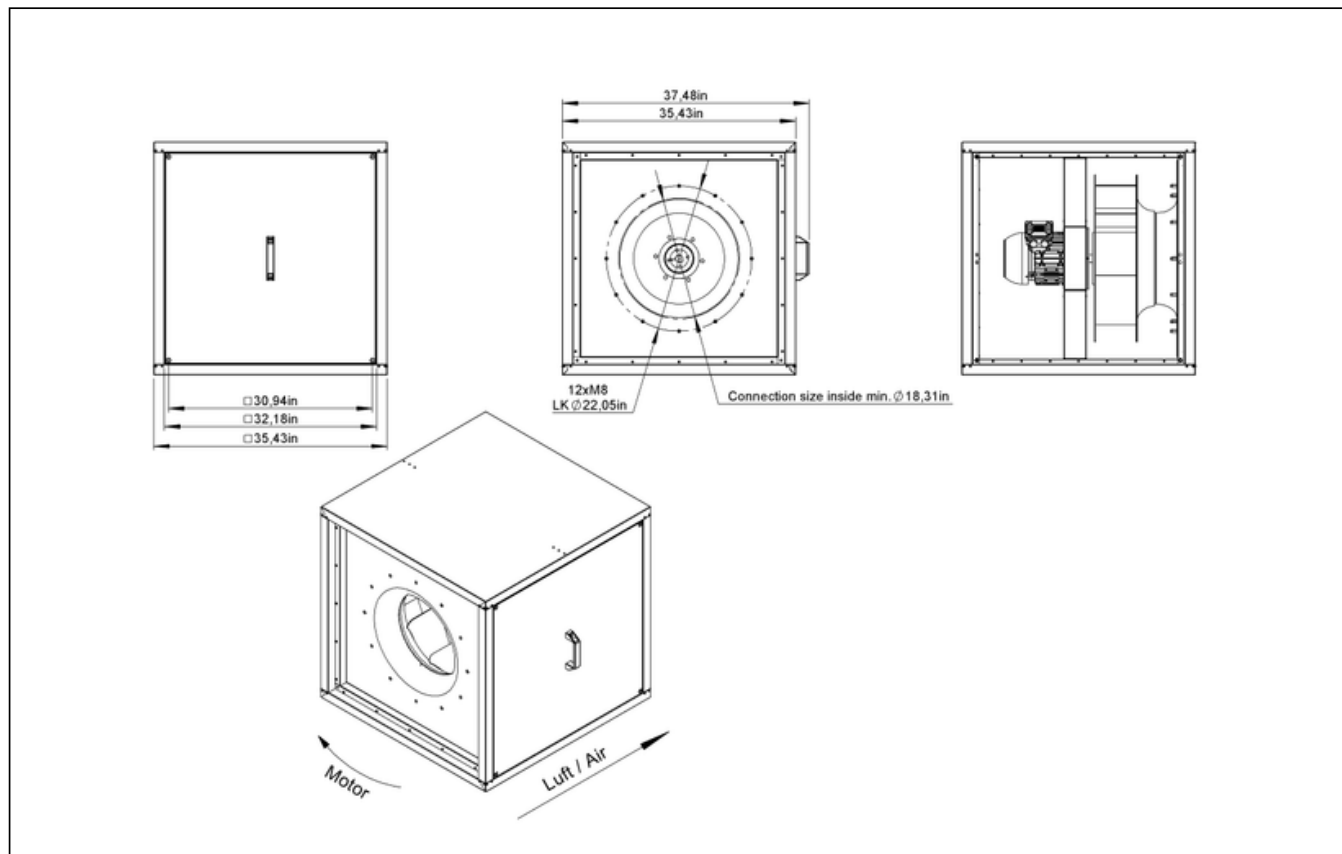

MPC 560 D4 40

157203

ruck

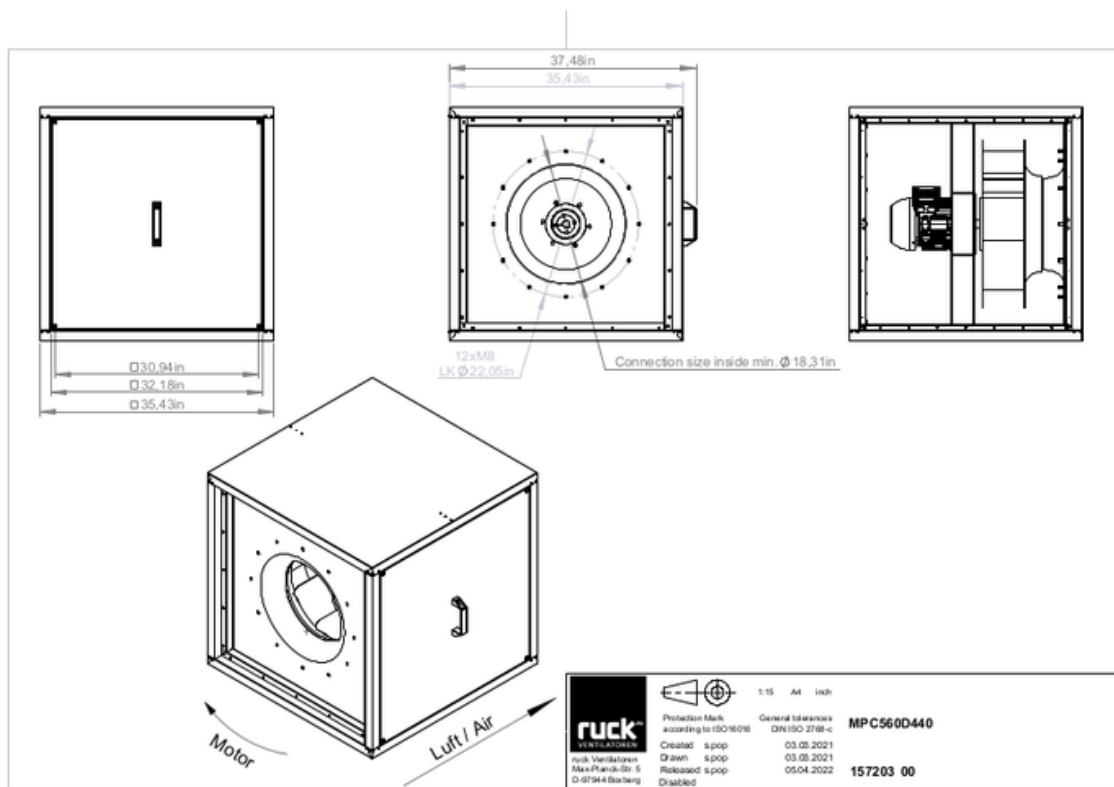


zur Produktseite

MPC 560 D4 40

157203

ruck

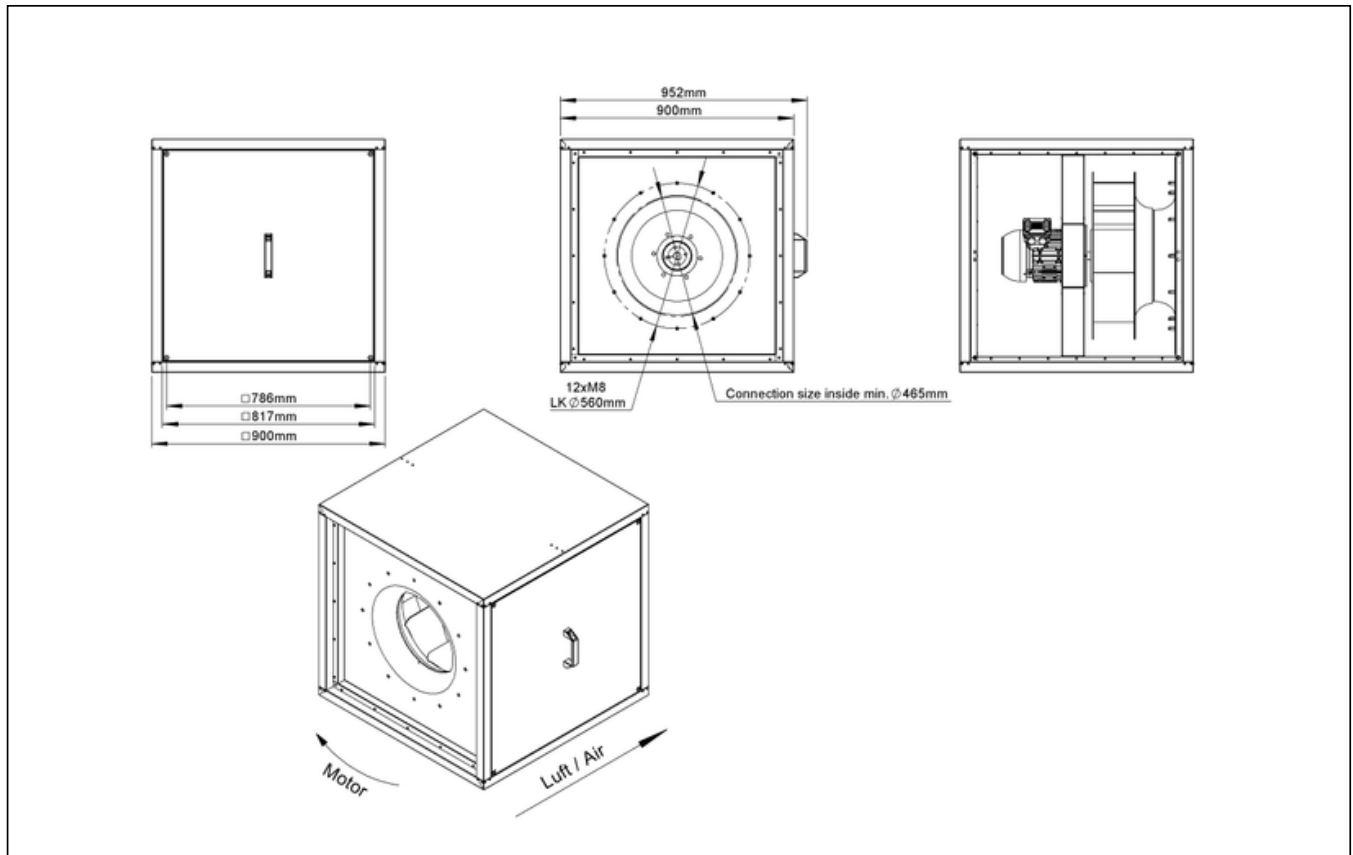


zur Produktseite


MPC 560 D4 40

157203

ruck

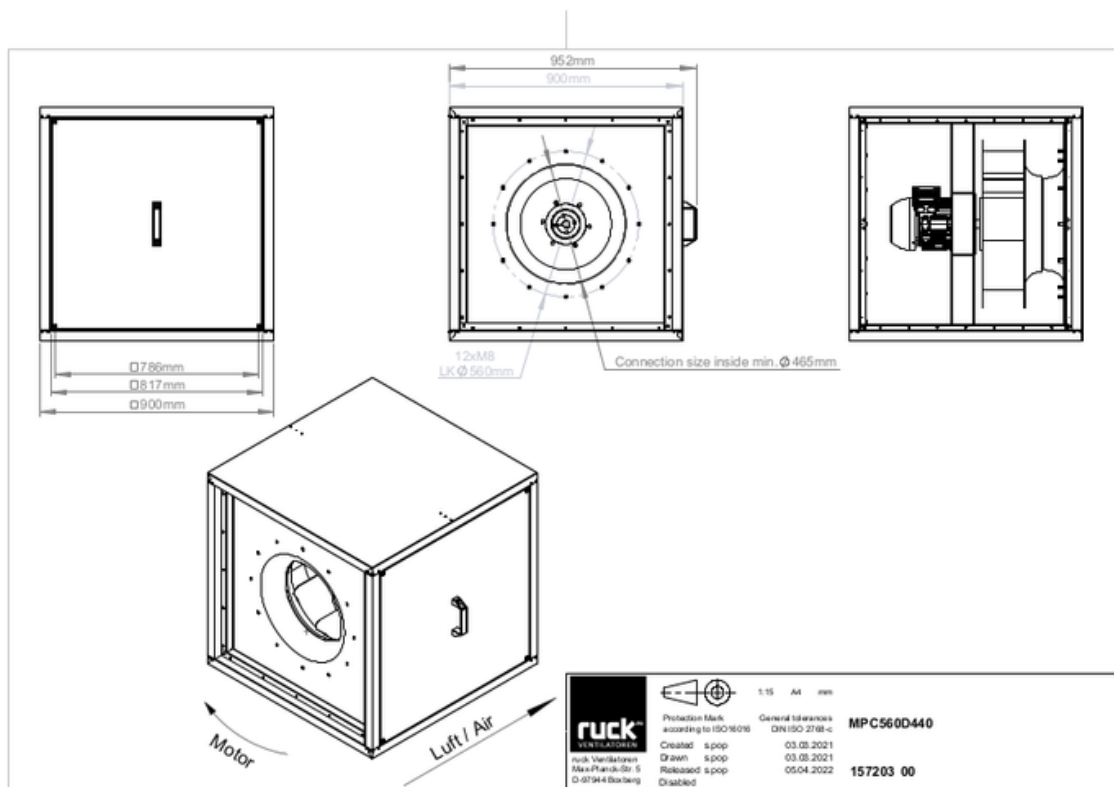

zur Produktseite

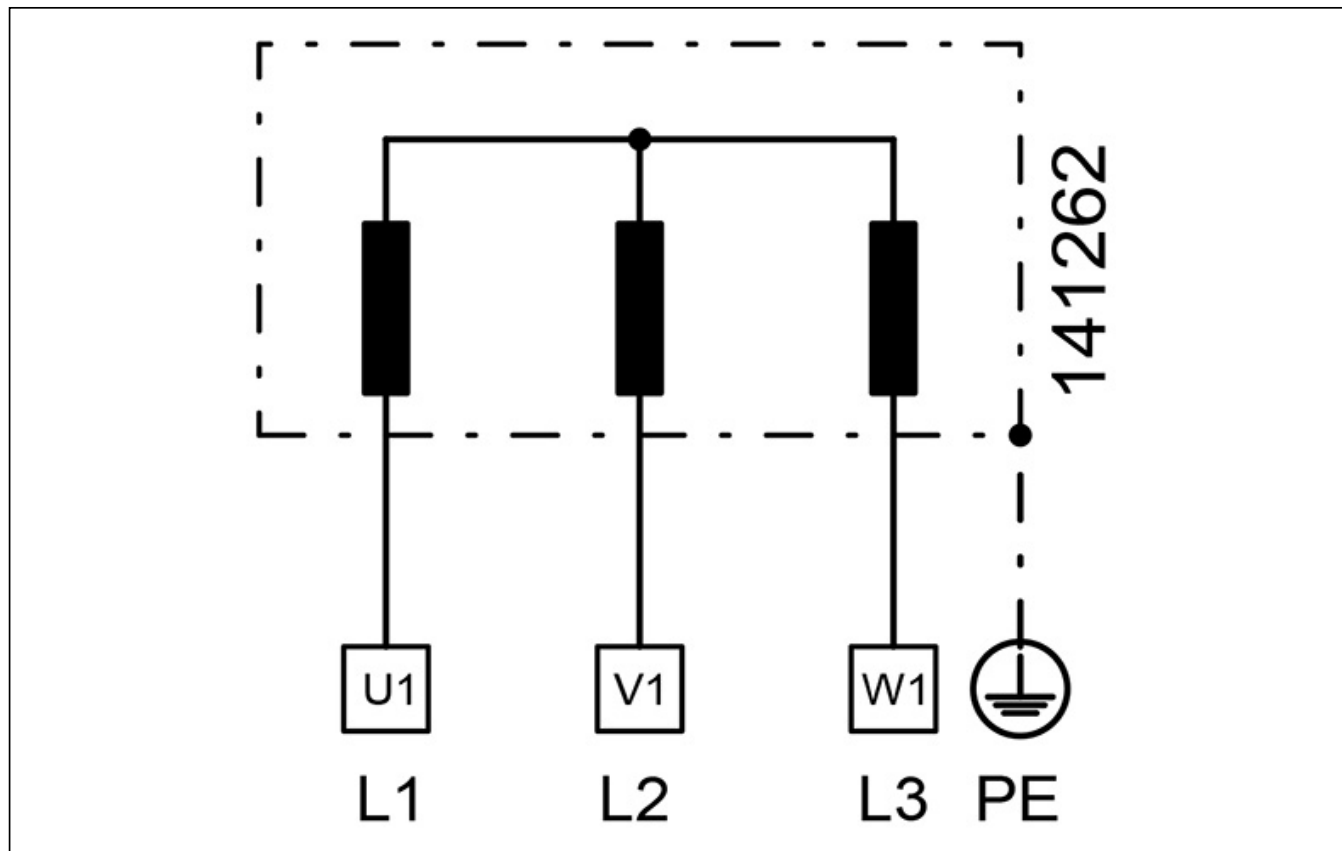

MECHANICAL ACCESSORIES

FB 900 | 160868



- Air filter box for panel filter
- For MPC box 900
- For 1 or 2 filter (not included)
- Housing made of galvanized sheet steel

GR MPC 03 | 123434



- Base frame für MPC
- Galvanized steel sheet

USM 900 560 | 139997



- Transition spigot
- Galvanized steel sheet
- Insulated

USM 900 630 | 140061




- Transition spigot
- Galvanized steel sheet
- Insulated

USM 900 500 | 140364



- Transition spigot
- Galvanized steel sheet
- Insulated

UCP 900 | 142569



- Closed panel
- Galvanized steel sheet

RVK 500 | 153900



- Automatic tube shutter
- Sheet steel, powder coated
- For vertical installation
- Flange mounting

RVK H 500 | 154688



- Automatic tube shutter
- Sheet steel, powder coated
- For horizontal installation
- Flange mounting

UQR 900 560 01 | 139875



- Transition duct / tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

UQR 900 630 01 | 139887



- Transition duct/tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

VM 500 | 118094



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

VM 560 | 119496



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

VM 630 | 119497



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

AS MPC 500 | 140871



- Inlet spigot
- Galvanized steel sheet

AS MPC 560 | 140876



- Inlet spigot
- Galvanized steel sheet

AS MPC 630 | 140880



- Inlet spigot
- Galvanized steel sheet

RAF 500 | 154021

RVS 500 | 154193

ESD 500 | 153956

WSH MPC 03 | 123435



zur Produktseite

MPC 560 D4 40

157203



- Round flange
- Sheet steel, powder coated



- Tube connection spigot
- Sheet steel, powder coated
- Suitable for outdoor installation
- Flange mounting



- Inlet cone
- Steel sheet, powder coated
- Flange mounting




- Weather protection hood
- Galvanized steel sheet

WSG MPC 900 | 140755



- Weather protection grille
- Galvanized steel sheet

SGW 500 | 154052



- Protection grille, wide meshed
- Steel sheet, galvanized
- Flange mounting

RD MPC 900 | 140101




- Rain cover for outdoor installation
- Galvanized steel sheet

RAS 500 | 154250



- Round spigot, flexible
- Galvanized steel sheet, plastic band (PES)
- Temperature resistant up to 75 °C
- Flange mounting

SGE 500 | 154076



- Protection grille, narrow meshed
- Steel sheet, galvanized
- Flange mounting



zur Produktseite

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400\text{ V}$, $I_{max} = 25\text{ A}$
- Switching capacity $400\text{ V } 3\sim = 5,5\text{ kW}$
- Protection class IP 55

MS 03 | 140411



- Motor protection switch with Isolator switchfunktion
- $I_{max} = 400\text{ V}$, 50/60 Hz
- Max. 2.2 kW
- Protection class IP 55

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage+10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

FU 22 10 | 141845



- Frequency converter
- Supply voltage 230 V 1~ 50/60 Hz
- Output voltage 0 - 230 V 3~
- Protection class IP 20, for switch cabinet

FU 22 14 | 141867



- Frequency converter
- Supply voltage 400 V 3~ 50/60 Hz
- Output voltage 0 - 400 V 3~
- Protection class IP 20, for switch cabinet

FU 22 12 | 141856



- Frequency converter IP66
- Supply voltage 230 V 1~ 50/60 Hz
- Output voltage 0 - 230 V 3~
- Fire mode function (smoke extract fans)

FU 22 16 | 141878



- Frequency converter
- Supply voltage 400 V 3~ 50/60 Hz
- Output voltage 0 - 400 V 3~
- Fire mode function (smoke extract fans)

MTP 50 | 153133



- Potentiometer with multifunction output
- 230 VAC $\pm 10\%$ / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable

