


MPC 560 EC 40

157961


ruck

- Radial fan with backward curved impeller
- Variable discharge direction right / left / linear
- Double wall housing made of galvanized steel sheet, insulated
- Highly efficient EC motor, steplessly controllable
- Internal electronic temperature monitoring
- With bottom tray

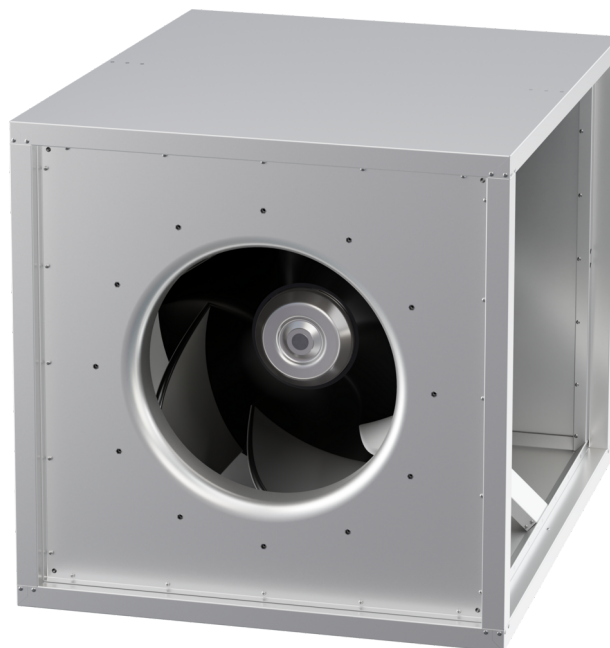

MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

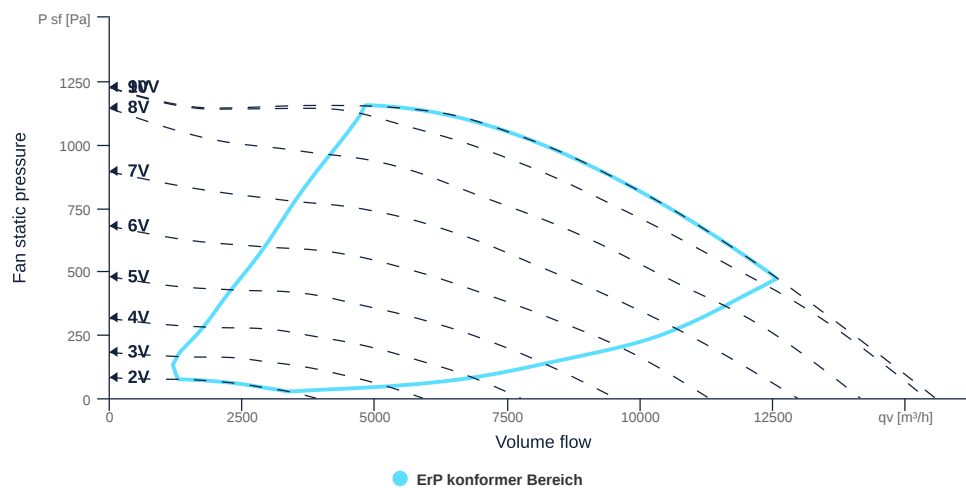

zur Produktseite

MPC 560 EC 40

157961

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Certifications	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN630		DN
Rated voltage (entire device)	400	V	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Steel		mat _{impeller}
Weight	101.1	kg	m
Nominal air flow rate, nominal point m³/h	7567.2	m³/h	q _{v,nom}
Nominal external pressure, static	574.7	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	2.1	m³/s	q _{v,nom}
Actual electrical input power, nominal point	1.82	kW	P _{e,nom}
Face velocity, nominal point	3.1	m/s	v _{nom}
Nominal external pressure, static	574.7	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	64.2	%	η _{es,SUP}
Highest external air leakage rate	0.26	%	
Enclosure sound level, nominal point	73	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



zur Produktseite

MPC 560 EC 40

157961




MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	3530	3530	W	P _{ed, max}
Max. operating current (device)	5.42	5.42	A	I _{ed, max}
Max. speed	1790	1790	1/min	n _{max}
Max. stat. efficiency	60.8	60.8	%	η _{es}
Max. fan efficiency	61.5	61.5	%	η _e
Max. flowrate	15560	15560	m³/h	Q _{v, max}
Max. stat pressure	1225	1225	Pa	p _{sf, max}
Max. medium temperature	60	60	°C	T _{m, max}
Max. environment temperature	60	60	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}



[zur Produktseite](#)


SCHALTPLÄNE / MASSZEICHNUNGEN

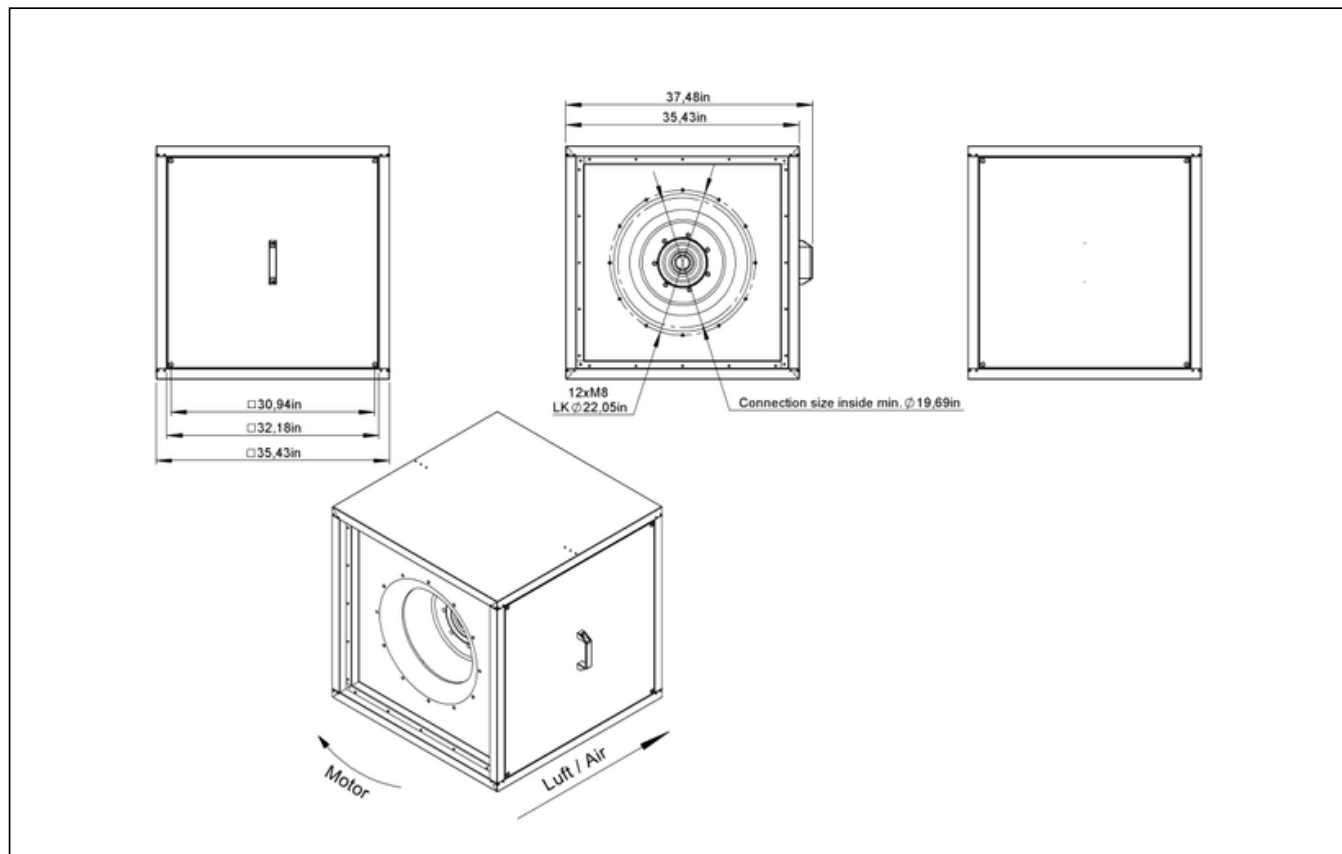

MPC 560 EC 40

157961

ruck

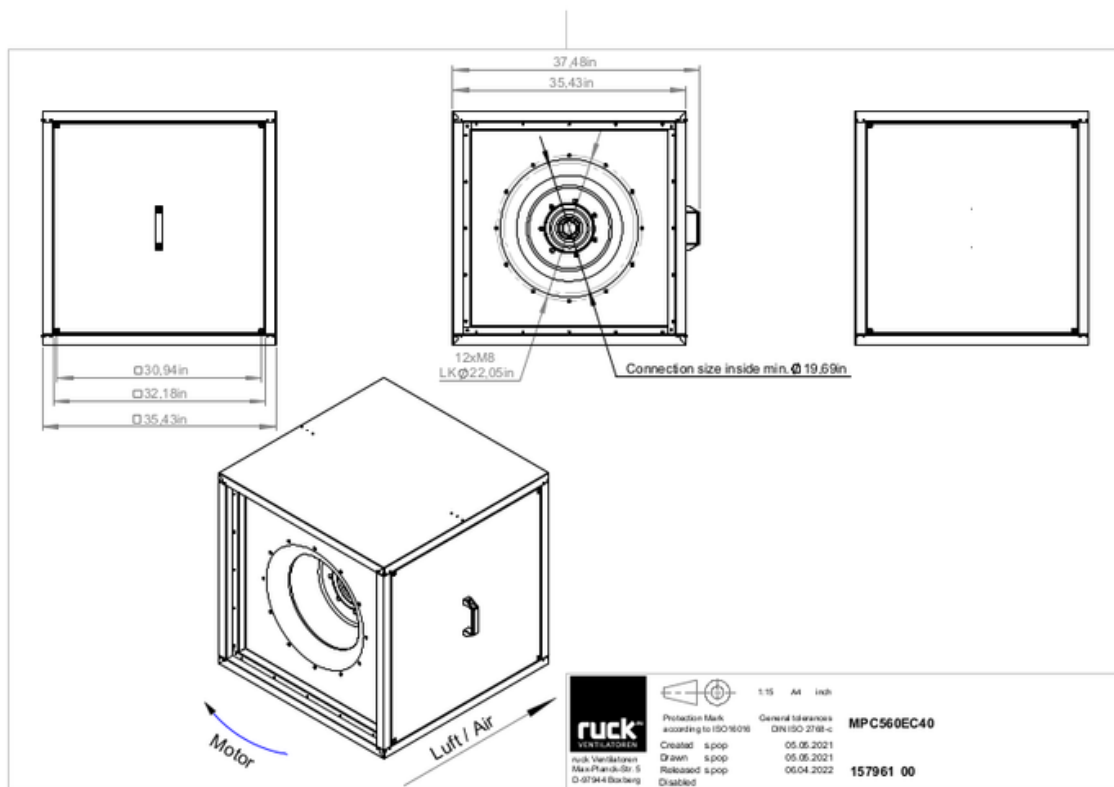


zur Produktseite

MPC 560 EC 40

157961

ruck

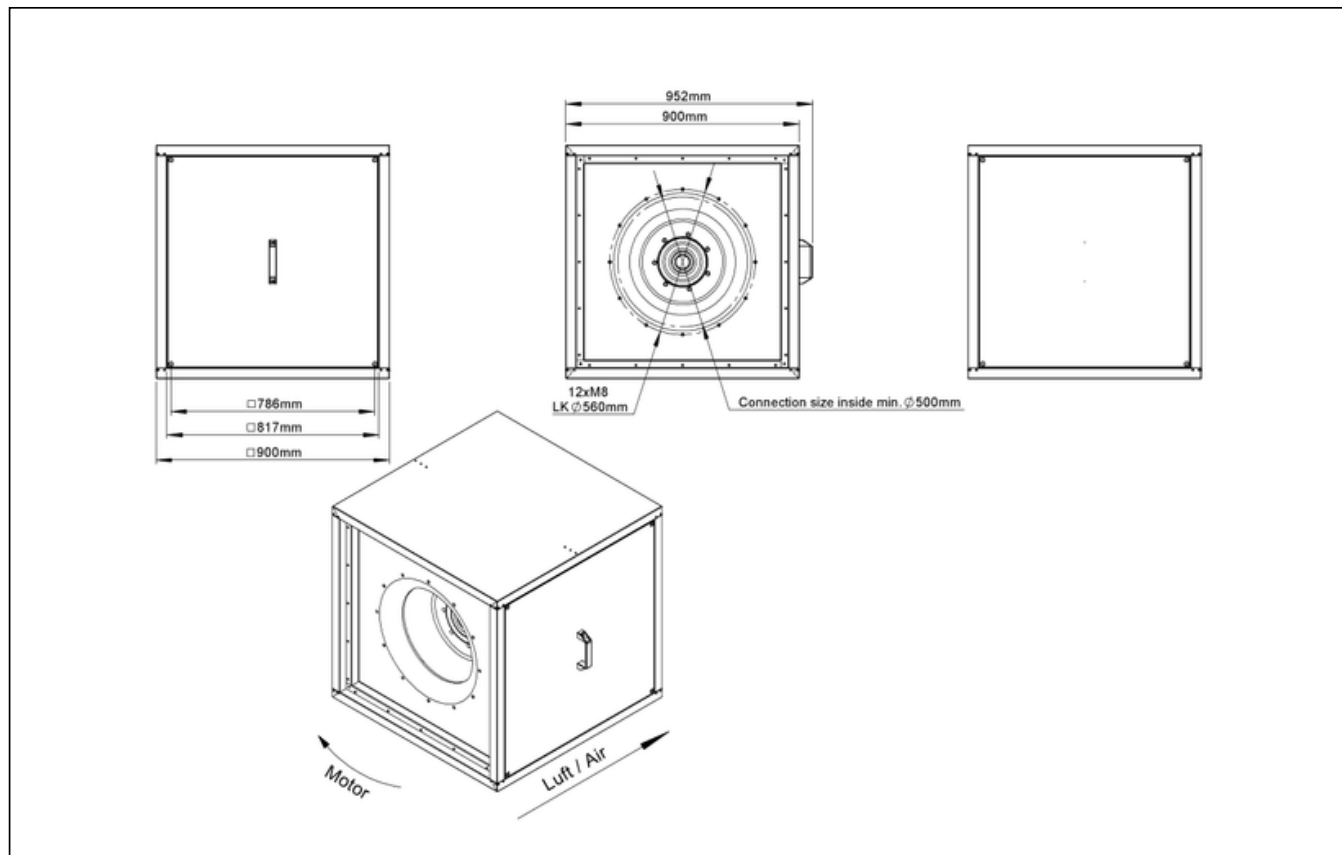


zur Produktseite

MPC 560 EC 40

157961

ruck

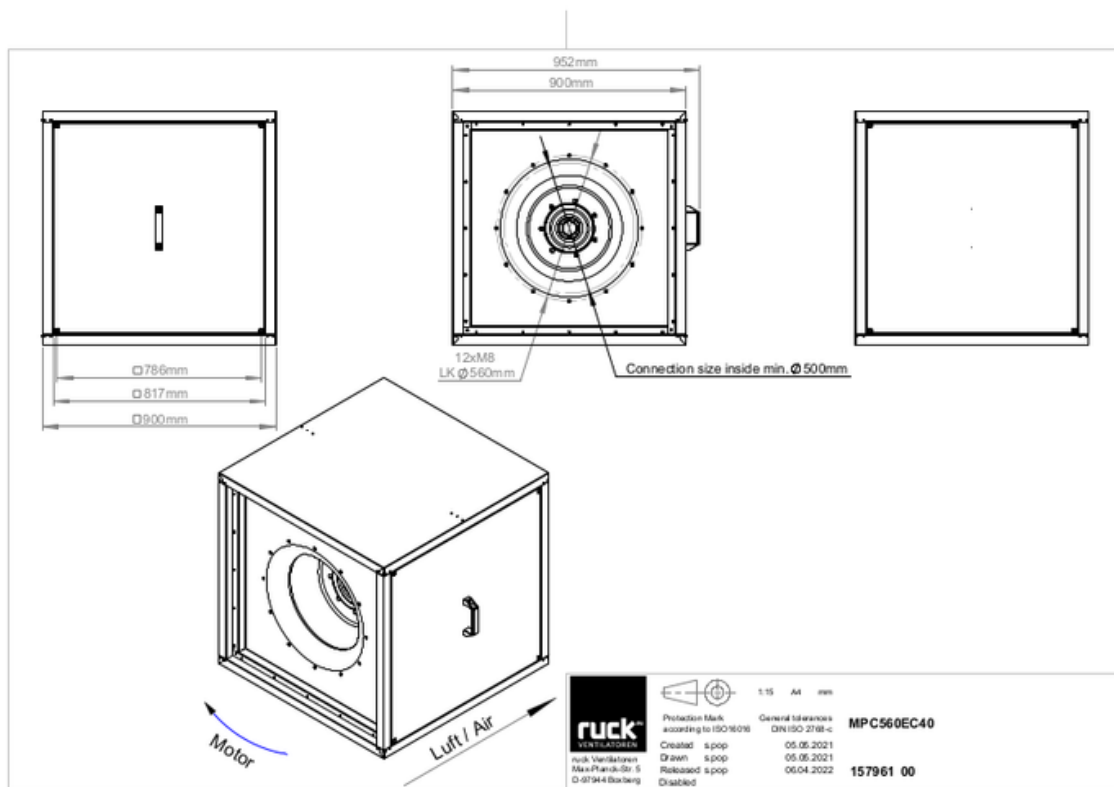


zur Produktseite

MPC 560 EC 40

157961

ruck

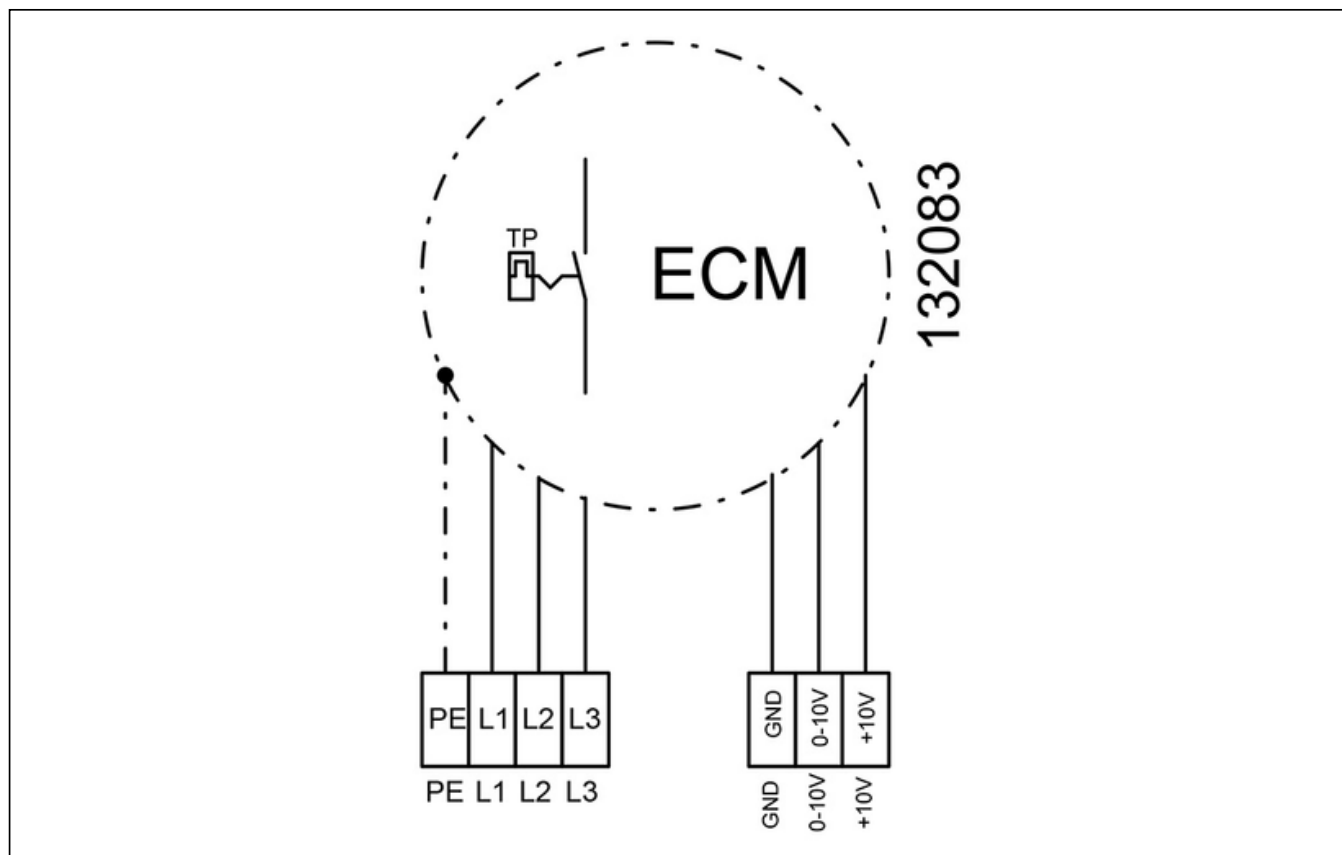


zur Produktseite

MPC 560 EC 40

157961

ruck

169852

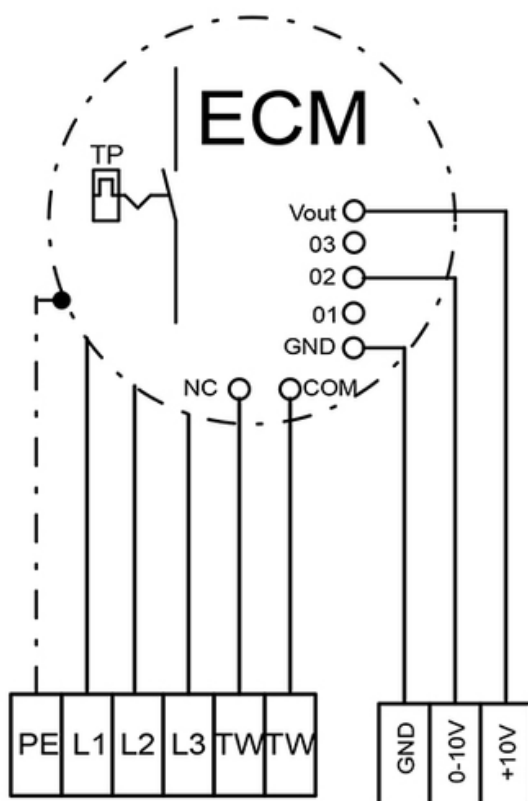

zur Produktseite

MECHANICAL ACCESSORIES

FB 900 | 160868



- Air filter box for panel filter
- For MPC box 900
- For 1 or 2 filter (not included)
- Housing made of galvanized sheet steel

GR MPC 03 | 123434



- Base frame für MPC
- Galvanized steel sheet

USM 900 560 | 139997



- Transition spigot
- Galvanized steel sheet
- Insulated

USM 900 630 | 140061




- Transition spigot
- Galvanized steel sheet
- Insulated

USM 900 500 | 140364



- Transition spigot
- Galvanized steel sheet
- Insulated

UCP 900 | 142569



- Closed panel
- Galvanized steel sheet

RVK 500 | 153900



- Automatic tube shutter
- Sheet steel, powder coated
- For vertical installation
- Flange mounting

RVK H 500 | 154688



- Automatic tube shutter
- Sheet steel, powder coated
- For horizontal installation
- Flange mounting

UQR 900 560 01 | 139875



- Transition duct / tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

UQR 900 630 01 | 139887



- Transition duct/tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

VM 500 | 118094



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

VM 560 | 119496



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

VM 630 | 119497



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

AS MPC 500 | 140871



- Inlet spigot
- Galvanized steel sheet

AS MPC 560 | 140876



- Inlet spigot
- Galvanized steel sheet

AS MPC 630 | 140880



- Inlet spigot
- Galvanized steel sheet

RAF 500 | 154021

RVS 500 | 154193

ESD 500 | 153956

WSH MPC 03 | 123435



zur Produktseite

MPC 560 EC 40

157961

ruck



- Round flange
- Sheet steel, powder coated



- Tube connection spigot
- Sheet steel, powder coated
- Suitable for outdoor installation
- Flange mounting



- Inlet cone
- Steel sheet, powder coated
- Flange mounting




- Weather protection hood
- Galvanized steel sheet

WSG MPC 900 | 140755



- Weather protection grille
- Galvanized steel sheet

SGW 500 | 154052



- Protection grille, wide meshed
- Steel sheet, galvanized
- Flange mounting

RD MPC 900 | 140101




- Rain cover for outdoor installation
- Galvanized steel sheet

RAS 500 | 154250



- Round spigot, flexible
- Galvanized steel sheet, plastic band (PES)
- Temperature resistant up to 75 °C
- Flange mounting

SGE 500 | 154076



- Protection grille, narrow meshed
- Steel sheet, galvanized
- Flange mounting



zur Produktseite

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400 \text{ V}$, $I_{max} = 25 \text{ A}$
- Switching capacity $400 \text{ V } 3\sim = 5,5 \text{ kW}$
- Protection class IP 55

MTP 20 | 128146



- Potentiometer $10 \text{ k}\Omega$
- Switching contact $1\text{A}/250\text{V AC} - 2,5\text{A}/12\text{V DC}$
- Max. ambient temperature $50 \text{ }^\circ\text{C}$
- VDE

MTP 30 | 143289



- Stepped potentiometer $10 \text{ k}\Omega$
- Step 1 + 2 settable $10\% - 100\% \text{ Vdc}$
- Step 3 $100\% \text{ Vdc}$
- Supply voltage $+10 \text{ Vdc}$

MTP 40 | 147359



- Potentiometer $10 \text{ k}\Omega$
- Connection in terminal box
- Max. ambient temperature $50 \text{ }^\circ\text{C}$
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature $0...+50 \text{ }^\circ\text{C}$
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output $0-10 \text{ V DC} + \text{FC enable} + \text{setpoint reached}$
- Pressure setting by means of decade switch

MTP 50 | 153133



- Potentiometer with multifunction output
- $230 \text{ VAC} \pm 10\% / 50-60 \text{ Hz}$
- Selectable output: $1-10 \text{ VDC} / 2-20 \text{ mA} / 10-100\% \text{ PWM}$
- Min. and max. output value adjustable

