


MPC 630 D6 T40

164831


ruck

- Backward curved radial impeller
- Variable discharge direction right / left / up
- Galvanized sheet steel housing, double-walled, mineral wool
- IE3 motor outside airflow, frequency controllable
- Conveyed medium temperature up to 120 °C in continuous operation
- Housing bottom designed with integrated drain

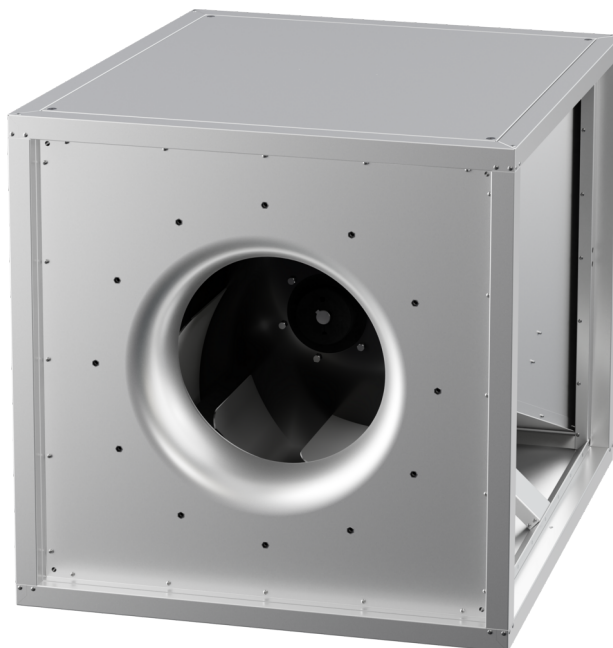

MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

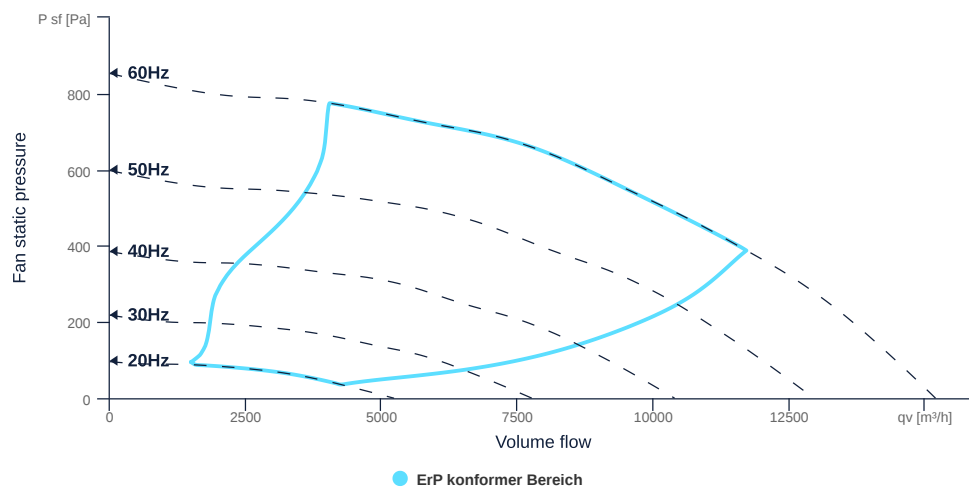

zur Produktseite

MPC 630 D6 T40

164831

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Certifications	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN630		DN
Rated voltage (entire device)	400	V	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Steel		mat _{impeller}
Weight	127	kg	m
Nominal air flow rate, nominal point m³/h	11710.8	m³/h	q _{v,nom}
Nominal external pressure, static	388	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	3.25	m³/s	q _{v,nom}
Actual electrical input power, nominal point	2.63	kW	P _{e,nom}
Face velocity, nominal point	5.45	m/s	V _{nom}
Nominal external pressure, static	388	Pa	p _{s,nom}
static efficiency of the extract fan, nominal point	48	%	η _{es,EHA}
Highest external air leakage rate	0.12	%	
Enclosure sound level, nominal point	72.6	dB(A)	L _{WA2}
Rating	Product is compliant 2018		


MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	2547	W	P _{ed, max}
Max. operating current (device)	5.2	A	I _{ed, max}
Max. speed	1190	1/min	n _{max}
Max. stat. efficiency	55.6	%	η _{es}
Max. fan efficiency	56.3	%	η _e
Max. flowrate	15190	m³/h	q _{v, max}
Max. stat pressure	850	Pa	p _{sf, max}
Max. medium temperature	120	°C	T _{m, max}
Max. environment temperature	60	°C	T _{amb, max}
Min. environment temperature	-20	°C	T _{amb, min}



zur Produktseite


SCHALTPLÄNE / MASSZEICHNUNGEN

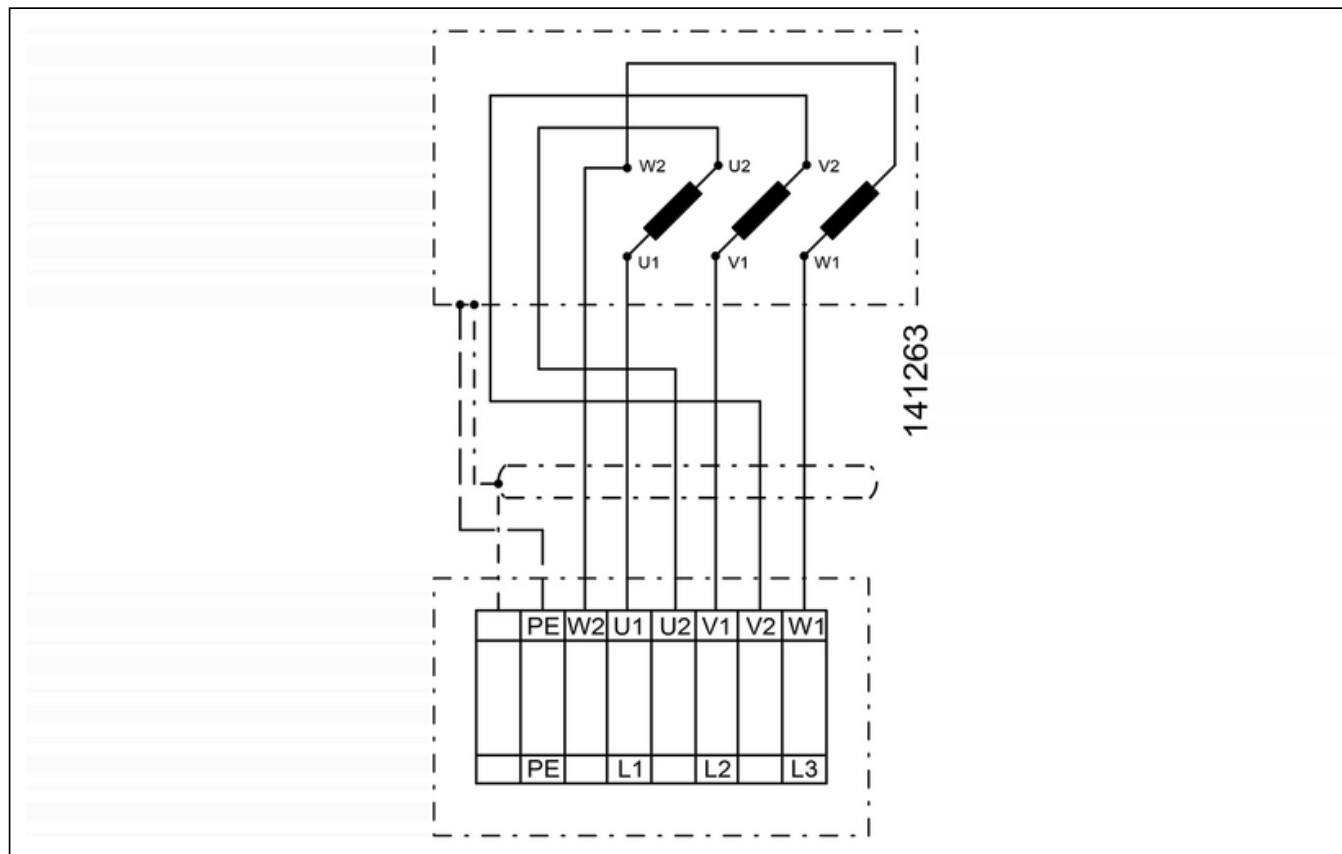

MPC 630 D6 T40

164831

ruck

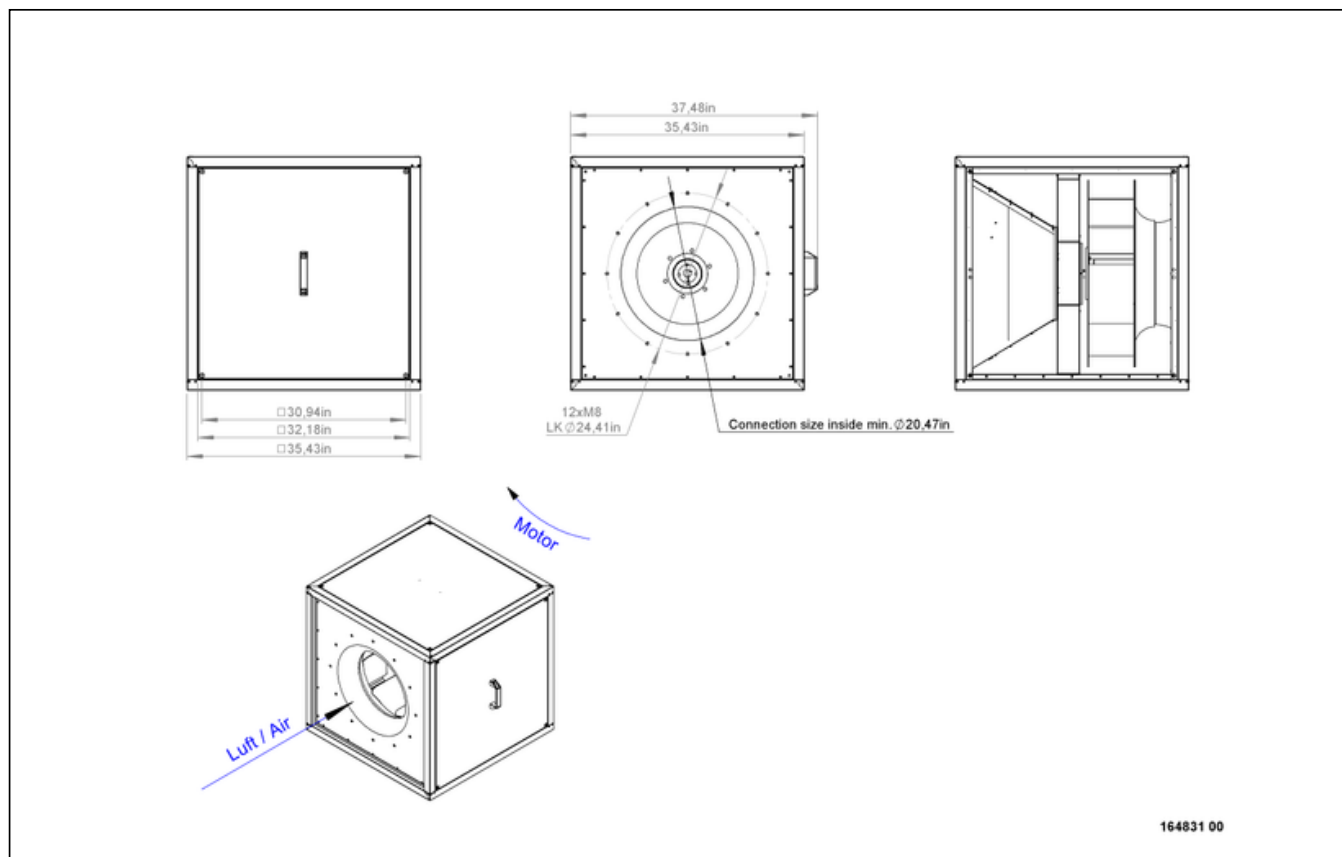


zur Produktseite

MPC 630 D6 T40

164831

ruck

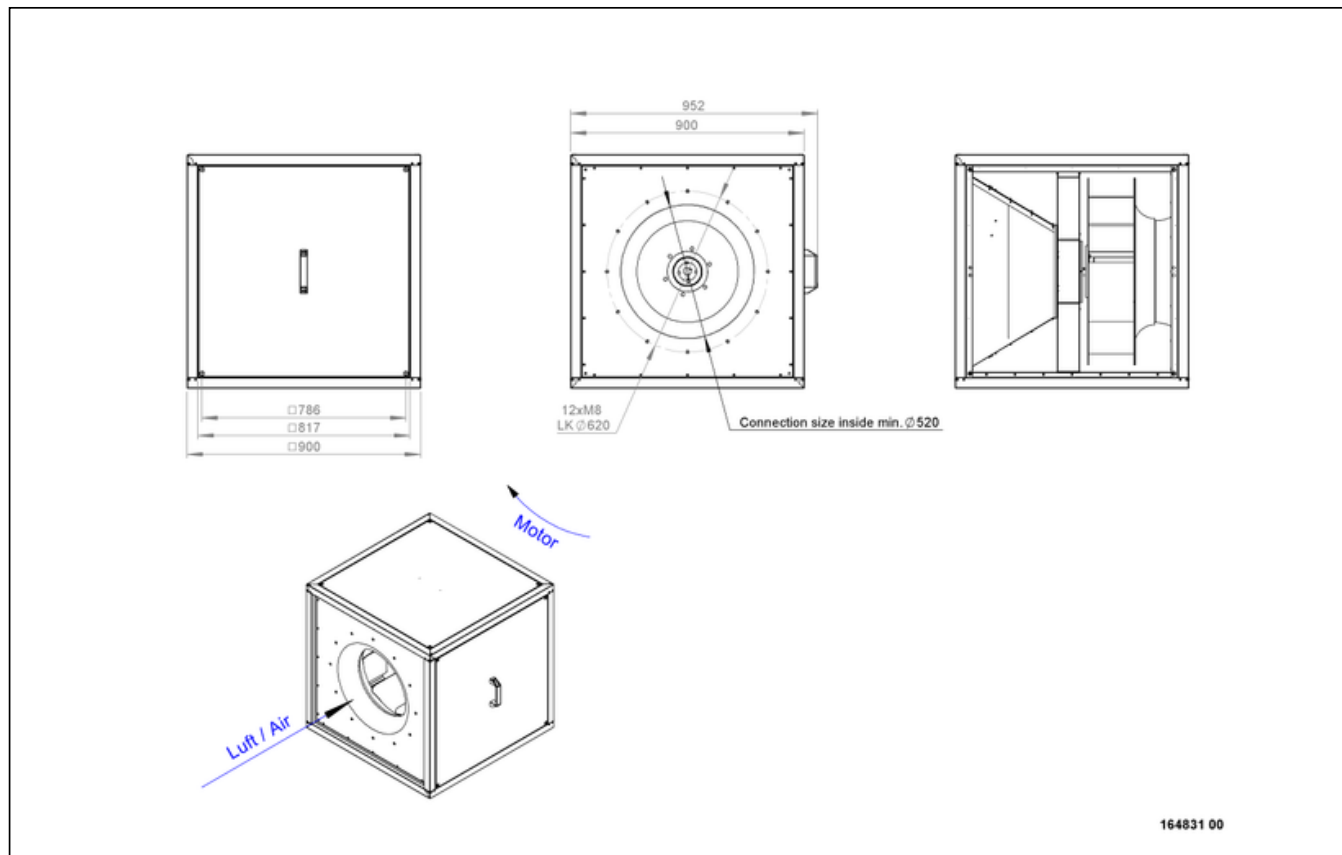


zur Produktseite

MPC 630 D6 T40

164831

ruck

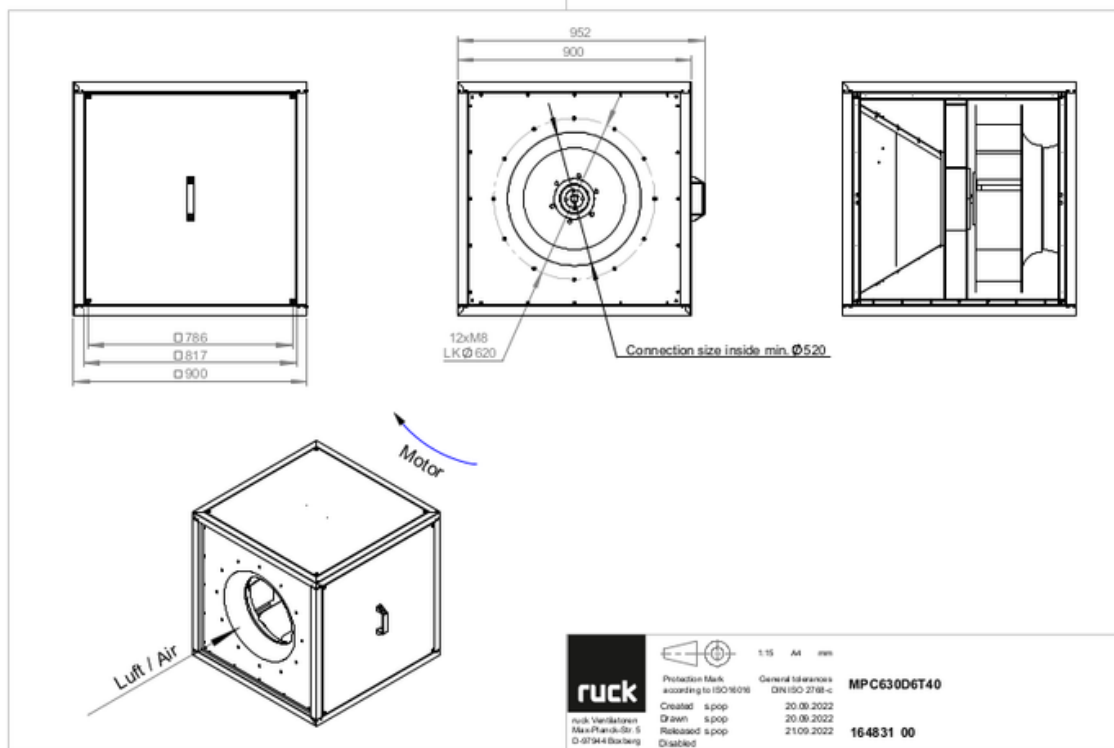


zur Produktseite

MPC 630 D6 T40

164831

ruck

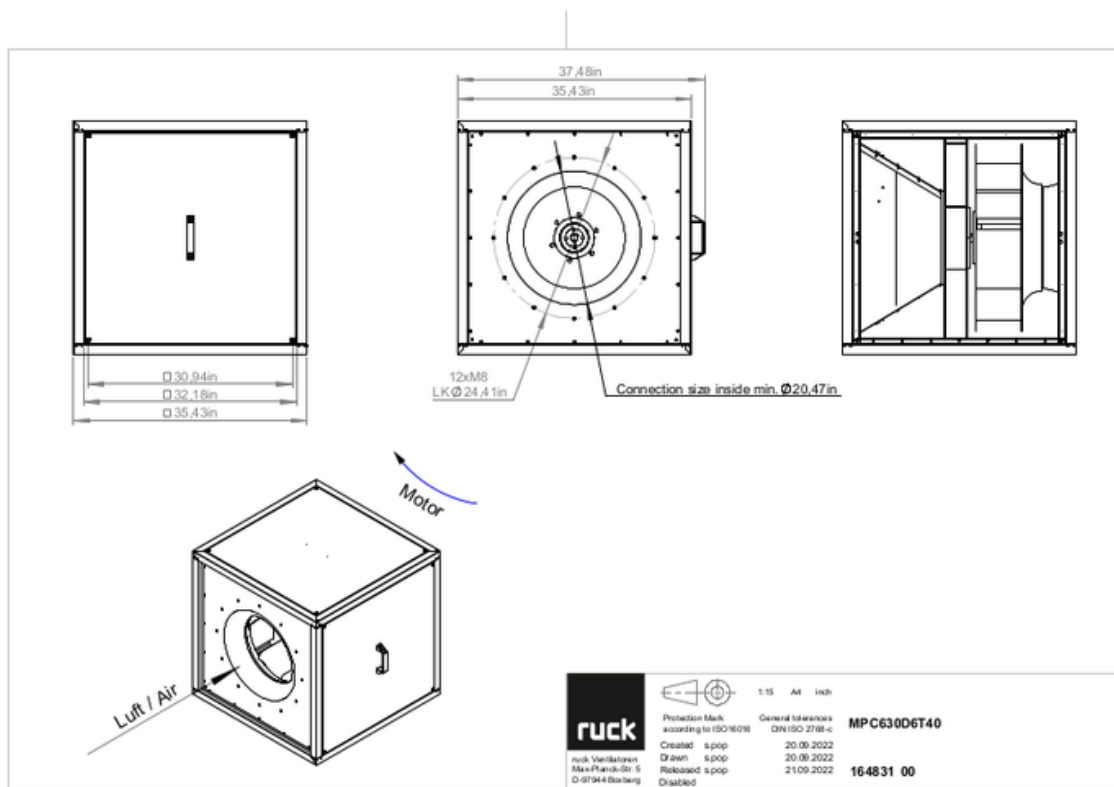

zur Produktseite

MECHANICAL ACCESSORIES

FB 900 | 160868



- Air filter box for panel filter
- For MPC box 900
- For 1 or 2 filter (not included)
- Housing made of galvanized sheet steel

MB MPC 03 | 122305



- Motor protection shield
- Sendzimir galvanized sheet

GR MPC 03 | 123434



- Base frame für MPC
- Galvanized steel sheet

USM 900 560 | 139997



- Transition spigot
- Galvanized steel sheet
- Insulated

USM 900 630 | 140061




- Transition spigot
- Galvanized steel sheet
- Insulated

USM 900 500 | 140364



- Transition spigot
- Galvanized steel sheet
- Insulated

UCP 900 | 142569



- Closed panel
- Galvanized steel sheet

RVK 560 | 153906



- Automatic tube shutter
- Sheet steel, powder coated
- For vertical installation
- Flange mounting

RVK H 560 | 155628



- Automatic tube shutter
- Sheet steel, powder coated
- For horizontal installation
- Flange mounting

UQR 900 560 01 | 139875



- Transition duct / tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

UQR 900 630 01 | 139887



- Transition duct/tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

VM 500 | 118094



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

VM 560 | 119496



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

VM 630 | 119497



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

AS MPC 500 | 140871



- Inlet spigot
- Galvanized steel sheet

AS MPC 560 | 140876



- Inlet spigot
- Galvanized steel sheet

AS MPC 630 | 140880

RVS 560 | 154195

SGW 560 | 154053

SGE 560 | 154077



zur Produktseite

MPC 630 D6 T40

164831


ruck




- Inlet spigot
- Galvanized steel sheet



- Tube connection spigot
- Sheet steel, powder coated
- Suitable for outdoor installation
- Flange mounting



- Protection grille, wide meshed
- Steel sheet, galvanized
- Flange mounting



- Protection grille, narrow meshed
- Steel sheet, galvanized
- Flange mounting

SG FB 900 | 159836



- Protection grille
- For filter box MPC size 900
- Galvanized sheet steel

WSH MPC 03 | 123435



- Weather protection hood
- Galvanized steel sheet

WSG MPC 900 | 140755



- Weather protection grille
- Galvanized steel sheet

LFP 56 ISO coarse 90% | 160699



- Air filter panel
- ISO coarse 90%
- 798x737x96 mm

LFP 56 ISO ePM1 55% | 160702



- Air filter panel
- ISO ePM1 55% (F7)
- 798x737x96 mm

LFP 56 ISO ePM10 50% | 160701



- Air filter panel
- ISO ePM10 50% (M5)
- 798x737x96 mm

LFP 56 ISO ePM1 80% | 160703



- Air filter panel
- ISO ePM1 80%
- 798x737x96 mm

RAF 560 | 154022



- Round flange
- Sheet steel, powder coated

RD MPC 900 | 140101



- Rain cover for outdoor installation
- Galvanized steel sheet

RAS 560 | 154251



- Round spigot, flexible
- Galvanized steel sheet, plastic band (PES)
- Temperature resistant up to 75 °C
- Flange mounting



zur Produktseite

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400\text{ V}$, $I_{max} = 25\text{ A}$
- Switching capacity $400\text{ V } 3\sim = 5,5\text{ kW}$
- Protection class IP 55

MS 03 | 140411



- Motor protection switch with Isolator switchfunktion
- $I_{max} = 400\text{ V}$, 50/60 Hz
- Max. 2.2 kW
- Protection class IP 55

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage+10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 50 | 153133



- Potentiometer with multifunction output
- 230 VAC $\pm 10\%$ / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable

FU 22 53 | 165487



- Frequency converter
- Supply voltage 230 V 1~ 50/60 Hz
- Output voltage 0 - 230 V 3~
- Protection class IP 20, for switch cabinet

FU 22 54 | 165488



- Frequency converter IP66
- Supply voltage 230 V 1~ 50/60 Hz
- Output voltage 0 - 230 V 3~
- Fire mode function (smoke extract fans)

FU 22 55 | 165489



- Frequency converter
- Supply voltage 400 V 3~ 50/60 Hz
- Output voltage 0 - 400 V 3~
- Protection class IP 20, for switch cabinet

FU 22 56 | 165490



- Frequency converter
- Supply voltage 400 V 3~ 50/60 Hz
- Output voltage 0 - 400 V 3~
- Fire mode function (smoke extract fans)

