

MPS 500 E4 21


138045

- Backward curved radial impeller
- Swing out fan unit
- Sheet steel housing double-walled, 40 mm mineral wool
- AC motor outside the airflow, controllable
- Conveyed medium temperature up to 120 °C in continuous operation
- With condensate and grease drain



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

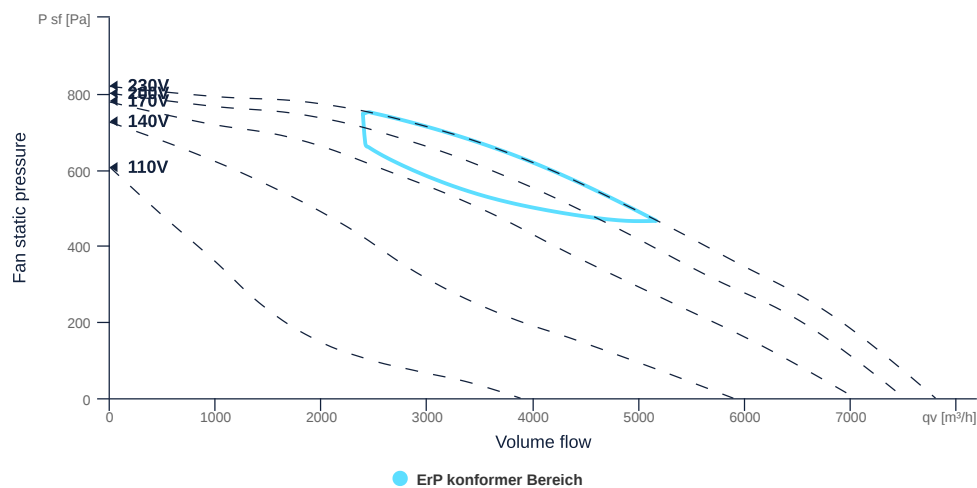

zur Produktseite

MPS 500 E4 21

138045

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Certifications	none		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN400		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	10 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Steel		mat _{impeller}
Weight	118	kg	m
Nominal air flow rate, nominal point m³/h	4615.2	m³/h	q _{v,nom}
Nominal external pressure, static	541	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	1.28	m³/s	q _{v,nom}
Actual electrical input power, nominal point	1.47	kW	P _{e,nom}
Face velocity, nominal point	10.2	m/s	v _{nom}
Nominal external pressure, static	541	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	54.3	%	η _{es,SUP}
Highest external air leakage rate	0.03	%	
Enclosure sound level, nominal point	74	dB(A)	L _{WA2}
Rating	Product is compliant 2018		

zur Produktseite



MPS 500 E4 21

138045

ruck


MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	1505	W	$P_{ed, max}$
Max. operating current (device)	8.43	A	$I_{ed, max}$
Max. speed	1460	1/min	n_{max}
Max. stat. efficiency	46.2	%	η_{es}
Max. fan efficiency	50	%	η_e
Max. flowrate	7800	m ³ /h	$Q_{v, max}$
Max. stat pressure	815	Pa	$p_{sf, max}$
Max. medium temperature	120	°C	T_m, max
Max. environment temperature	40	°C	$T_{amb, max}$
Min. environment temperature	-25	°C	$T_{amb, min}$
Min. voltage	110	V	U_{min}



zur Produktseite

SCHALTPLÄNE / MASSZEICHNUNGEN

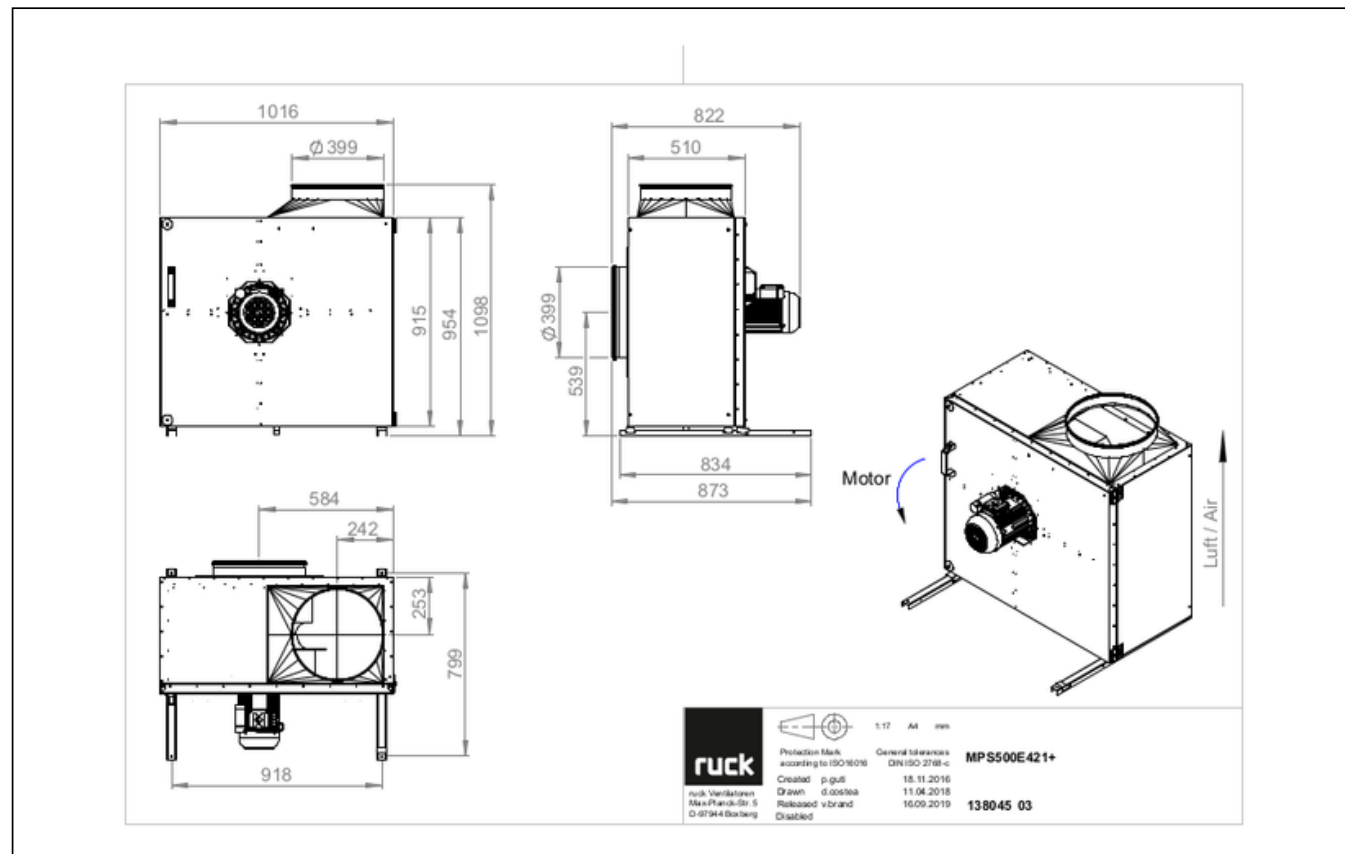


zur Produktseite

MPS 500 E4 21

138045

ruck

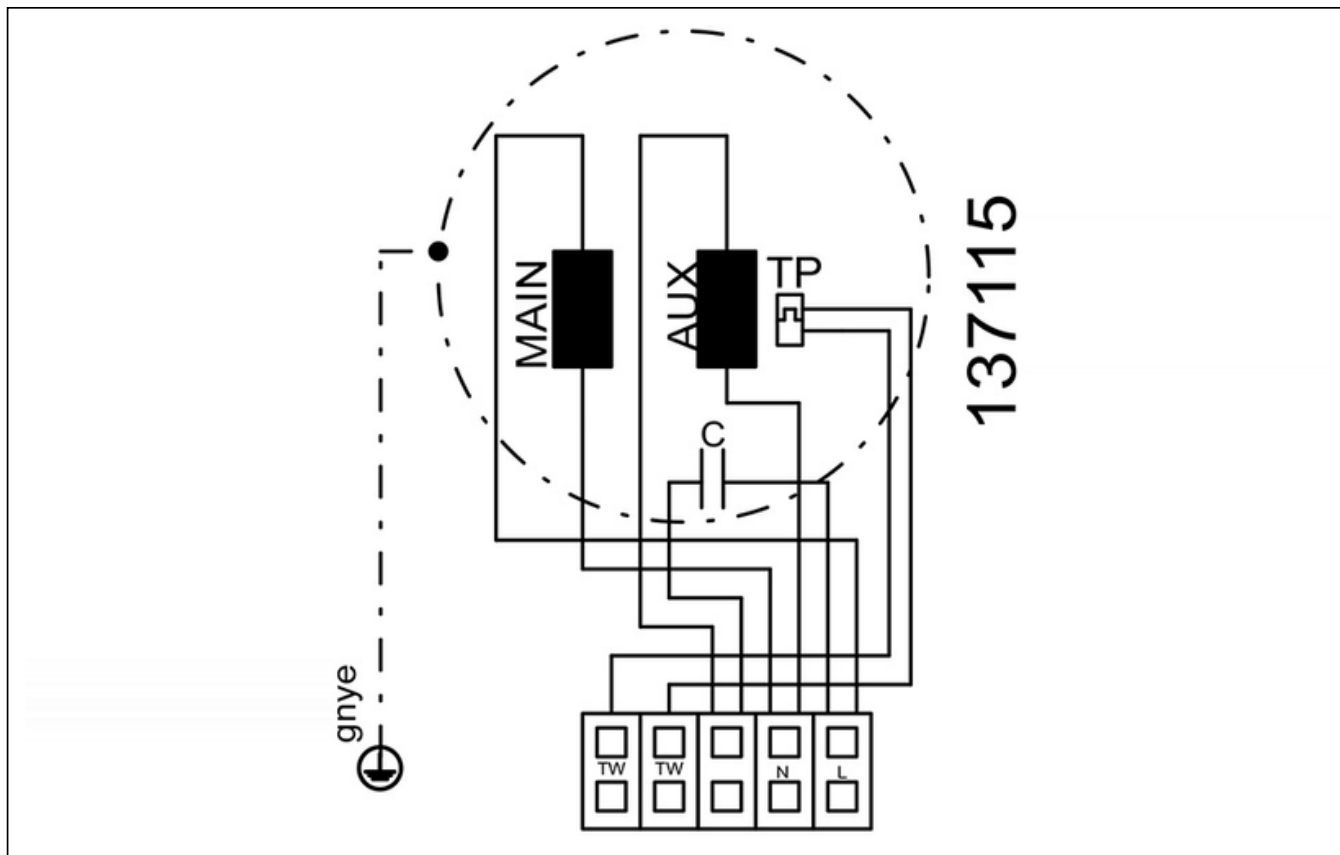


zur Produktseite

MPS 500 E4 21

138045

ruck

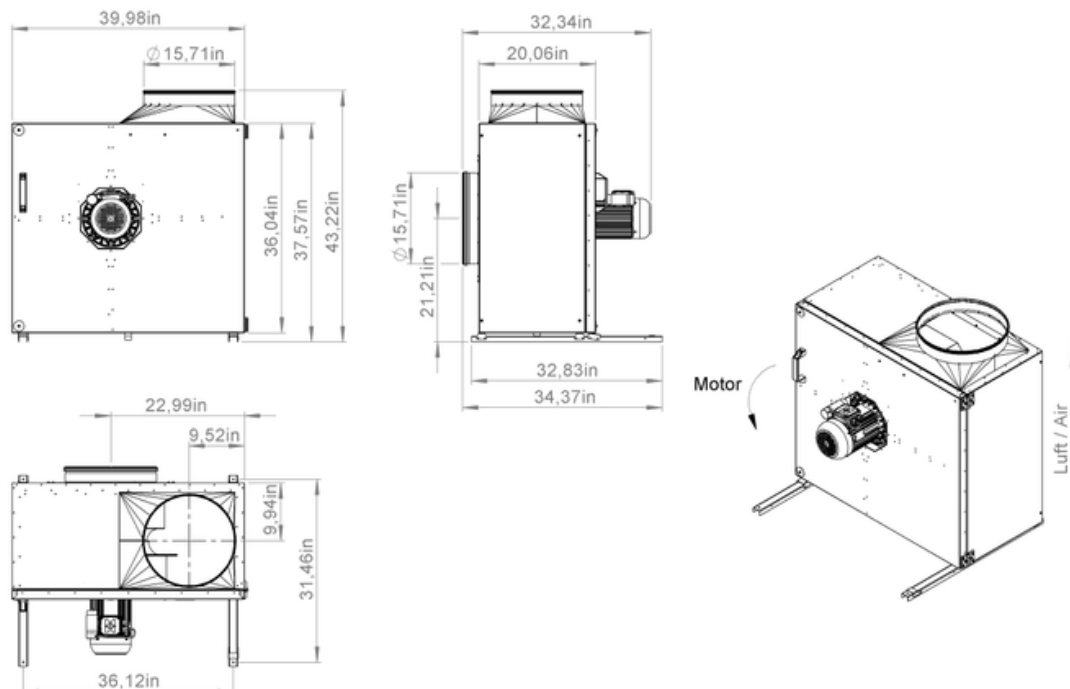

138045 03




zur Produktseite

MPS 500 E4 21

138045

ruck

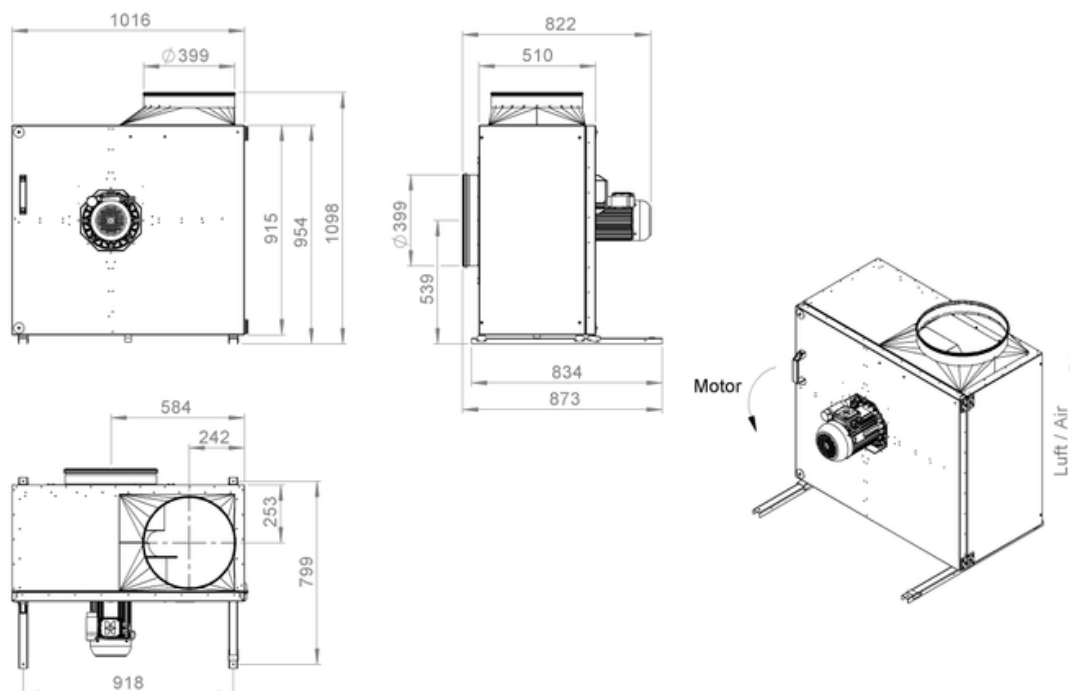


138045 03



zur Produktseite

MPS 500 E4 21

138045

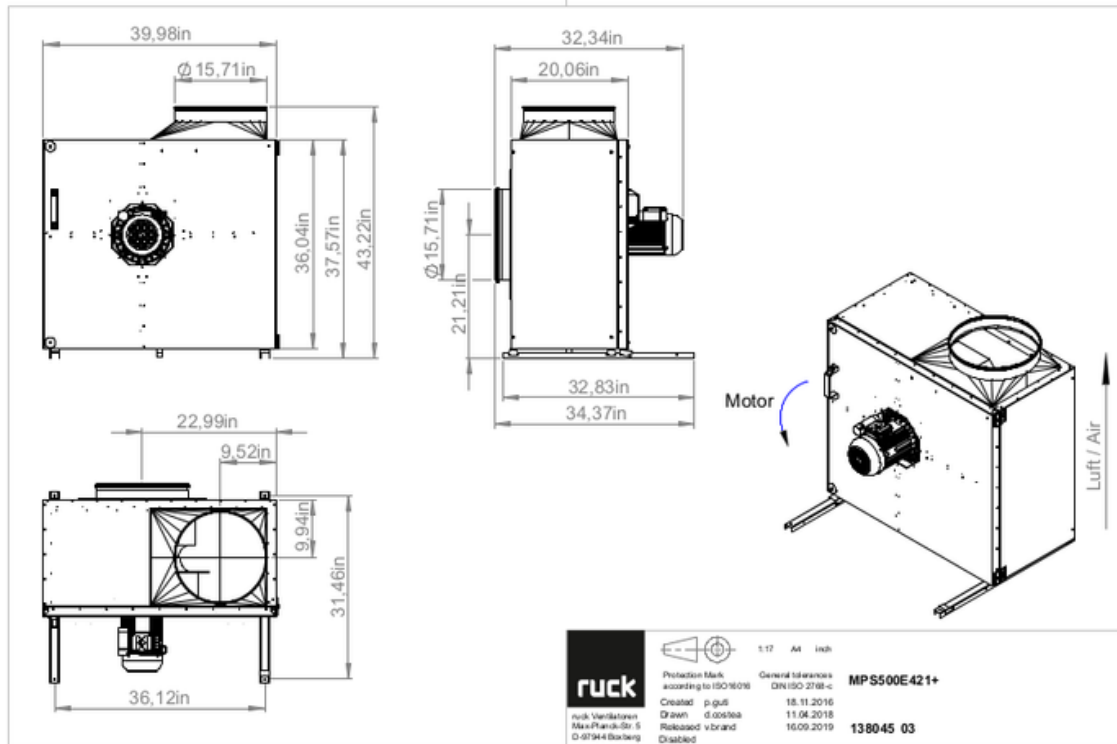

MECHANICAL ACCESSORIES

RSK 400 | 102691



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

RSK 400D | 113490



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

WK MPS 08 | 128095



- For wall mounting of a box fan
- Galvanized steel sheet
- 1 Pack = 2 pieces

VM 400 | 102654



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

WSH MPS | 103661



- Weather protection hood for motor
- Galvanized steel sheet



zur Produktseite

ELECTRICAL ACCESSORIES

GS 01 | 102787



- Isolator switch
- $U_{max} = 400 \text{ V}$, 50/60 Hz
- Switching capacity 400 V 3~ = 5,5 kW
- $I_{max} = 16 \text{ A}$

TEM 100 | 103511



- 5-step transformer
- 230 V, 50/60 Hz, 10 A
- Output voltage: 230-190-170-140-110-80-0 V
- Protection class IP 54

TEM 100G | 109069



- 5-step transformer
- 230 V ~, 50/60 Hz

TES 100 02 | 146198



- 5-step transformer
- 230 V, 50/60 Hz, 10 A
- Without housing, control cabinet installation
- Protection class IP 20



zur Produktseite