


EMI 315 E2M O 01


158348

- High-efficiency, insulated diagonal fan
- Optimum sound attenuation due to silencer
- Very compact housing made of galvanized sheet steel
- Robust AC motor, 3-steps controllable
- Highest aerodynamic efficiency
- Conveyed medium temperature up to 55 °C in continuous operation

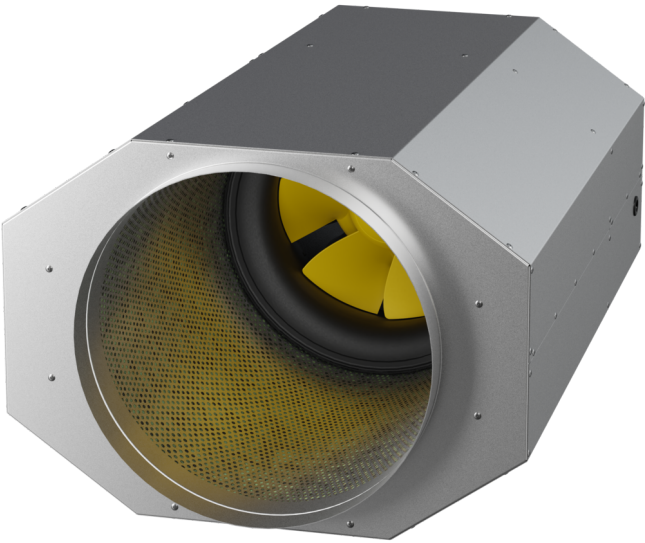

MAP


Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

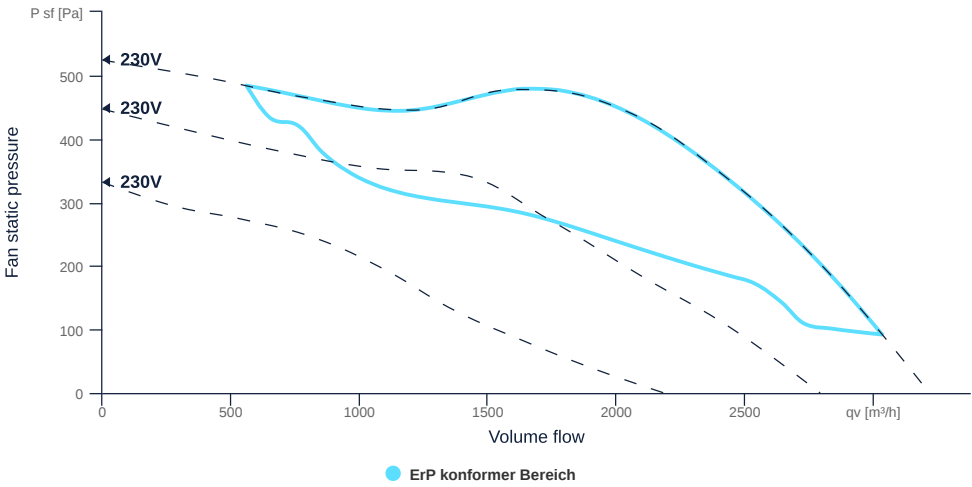

zur Produktseite

MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

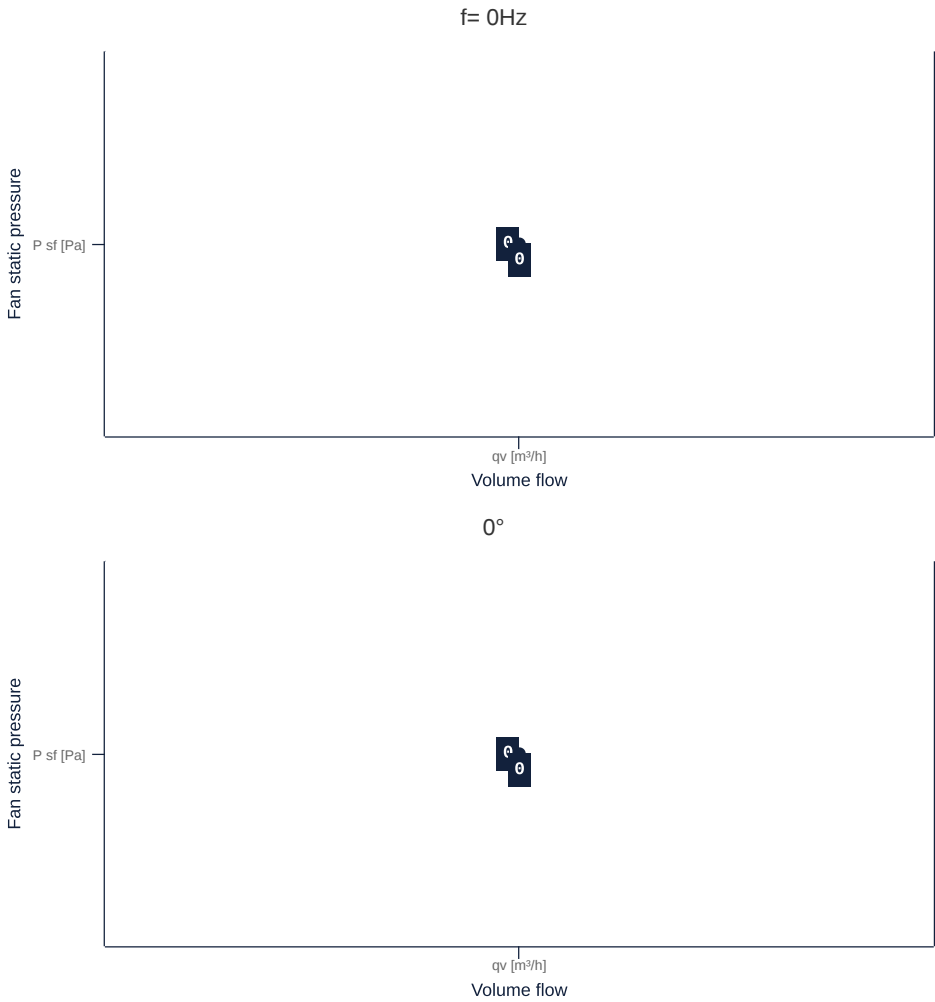

GENERAL DATA

Name	Value	Unit	Formula symbol
ERP conformity	Yes		
Certifications	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN315		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Plastic		mat _{impeller}
Weight	23.7	kg	m
Fan type	Diagonal		Fan _{type}
Category / Installation situation	B		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	438	W	P _{ed, max}
Max. operating current (device)	2.1	A	I _{ed, max}
Max. speed	2870	1/min	n _{max}
Max. stat. efficiency	55.1	%	η _{es}
Max. fan efficiency	59	%	η _e
Max. flowrate	3220	m³/h	Q _{v, max}
Max. stat pressure	520	Pa	p _{sf, max}
Max. medium temperature	55	°C	T _{m, max}
Max. environment temperature	55	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}



zur Produktseite

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP00		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Capacity capacitor		15	μF	Ccond
Voltage capacitor		450	V	VUcond
Number of poles (1)		2.000000		num polesw1
Rated voltage	230		V	Urated, f1
Rated current	2		A	Irated, f1
Shaft power	350		W	Pout, f1
UL-Certification motor		None		ULcert


ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2780	1/min	n _{opt}
Efficiency level	62.5	%	N
Efficiency category	total		catefficiency
Input power of the motor at the energy efficiency optimum	0.42	kW	P _{e, opt}
Overall efficiency	77	%	η _{ges}
Measurement category	B		meas cat
Fan pressure at energy efficiency optimum	421	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	2017	m³/h	q _{v, opt}



zur Produktseite





SCHALTPLÄNE / MASSZEICHNUNGEN

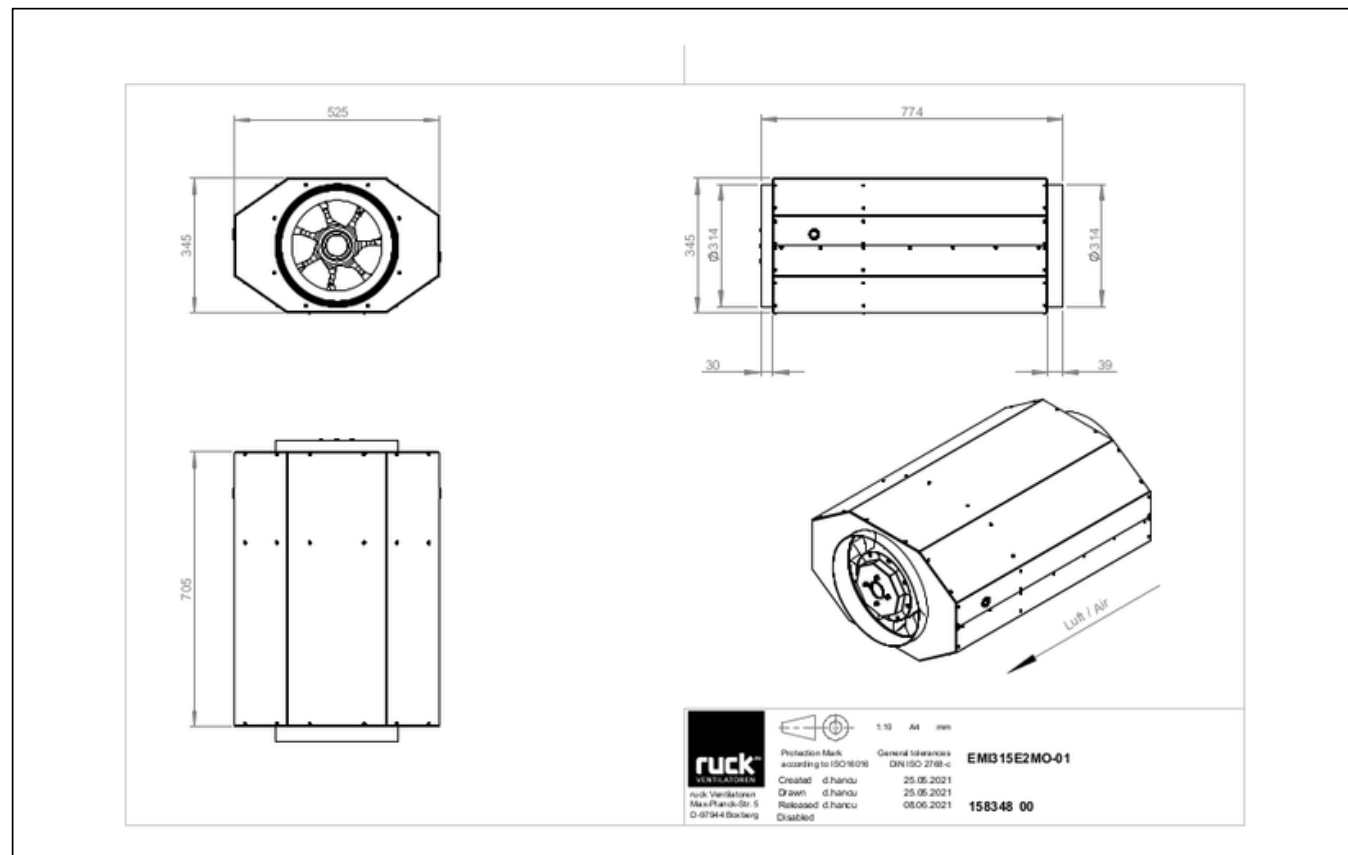

EMI 315 E2M O 01

158348

ruck

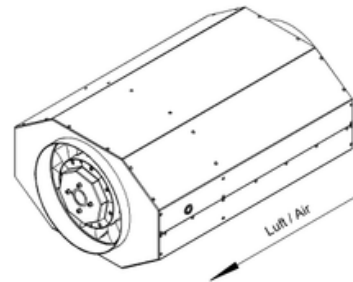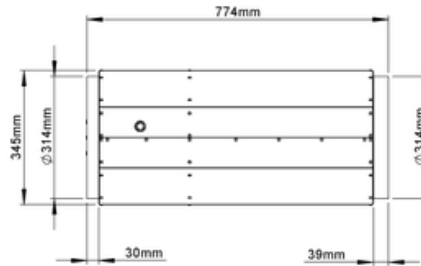

158348 00




zur Produktseite

EMI 315 E2M O 01

158348

ruck



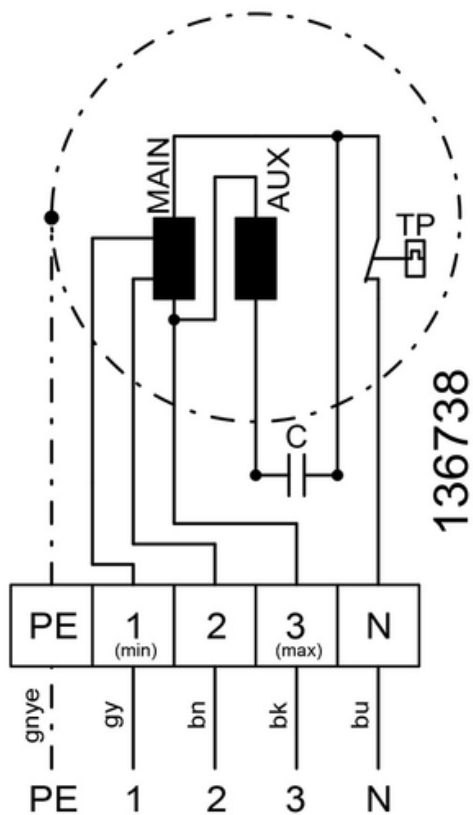


zur Produktseite

EMI 315 E2M O 01

158348


ruck

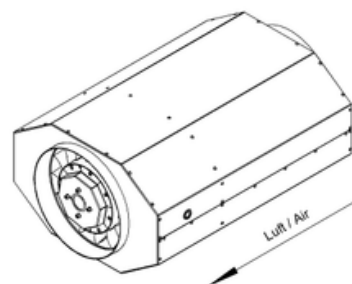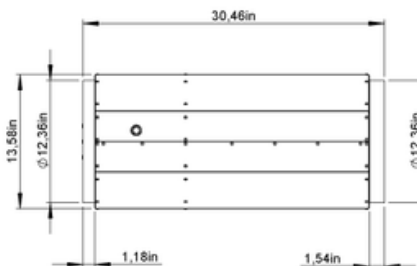

158348 00




zur Produktseite

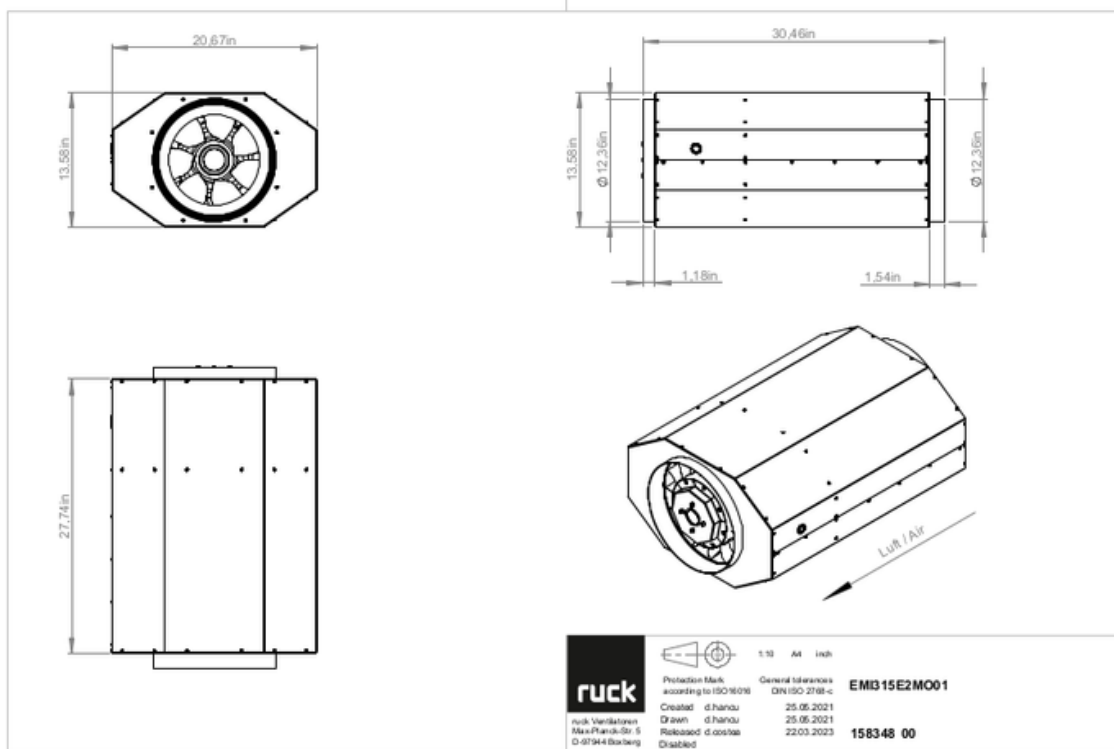

MECHANICAL ACCESSORIES

FV 315 | 112834



- Air filter box with mat filter ISO Coarse 45 % (G3)
- Toggle-type fastener

FT 315 | 112846



- Air filter box for pocket filter
- Toggle-type fastener
- Galvanized steel sheet housing
- Without filter

FTW 315 | 112855




- Air filter box with pocket filter M5
- Integrated warm water heating coil
- Galvanized steel sheet housing
- Toggle-type fastener

RSK 315 | 102664




- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

SG 315 01 | 102900



- Protection grille for tube connection
- Galvanized wire

SD 00315 500 R 05 | 158361



- Rigid tube silencer
- Galvanized steel sheet
- Insulated with mineral wool

RSK 315D | 113489



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

VM 315 | 102652



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces



EMI 315 E2M O 01

158348

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400 \text{ V}$, $I_{max} = 25 \text{ A}$
- Switching capacity $400 \text{ V } 3\sim = 5,5 \text{ kW}$
- Protection class IP 55

MTS 10 | 128145



- 3-step switch
- Max. ambient temperature $50 \text{ }^{\circ}\text{C}$
- Surface and flush mounting
- IP 44



zur Produktseite