


MPC 250 D2 T40

157209


ruck

- Backward curved radial impeller
- Removable side walls, variable discharge direction
- Sheet steel housing double-walled, 30 mm mineral wool
- IE3 motor outside the airflow, controllable
- Conveyed medium temperature up to 120 °C in continuous operation
- Housing bottom designed with integrated drain

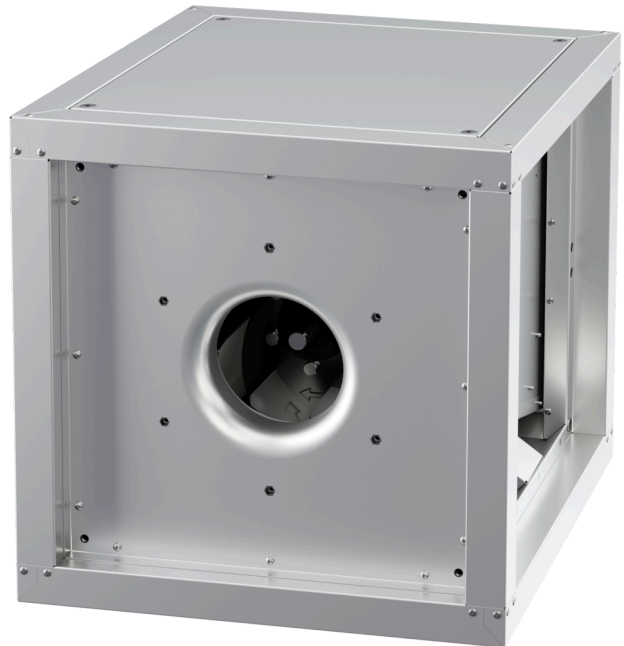

MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

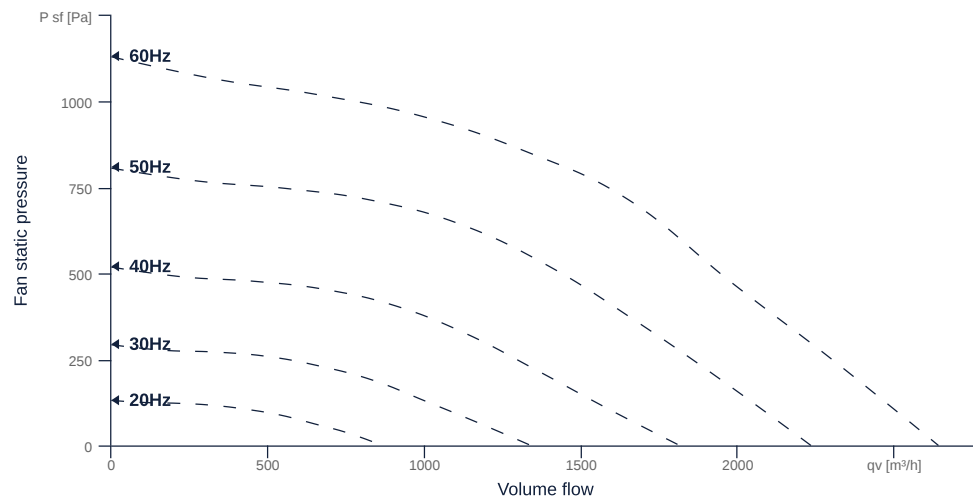

to the product detail page

MPC 250 D2 T40

157209

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN355		DN
Rated voltage (entire device)	400	V	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Steel		mat _{impeller}
Weight	37	kg	m
Nominal air flow rate, nominal point m³/h	2012.4	m³/h	q _{v,nom}
Nominal external pressure, static	450	Pa	p _{s,nom}
Fan type	Radial		F _{antype}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.56	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.64	kW	P _{e,nom}
Face velocity, nominal point	4.14	m/s	v _{nom}
Nominal external pressure, static	450	Pa	p _{s,nom}
static efficiency of the extract fan, nominal point	39.24	%	η _{es,EHA}
Highest external air leakage rate	0.14	%	
Enclosure sound level, nominal point	74.07	dB(A)	L _{WA2}
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	438	W	P _{ed, max}
Max. operating current (device)	1.2	A	I _{ed, max}
Max. speed	3490	1/min	n _{max}
Max. stat. efficiency	44.1	%	η _{es}
Max. fan efficiency	44.4	%	η _e
Max. flowrate	2630	m³/h	q _{v, max}
Max. stat pressure	1130	Pa	p _{sf, max}
Max. medium temperature	120	°C	T _{m, max}
Max. environment temperature	60	°C	T _{amb, max}
Min. environment temperature	-20	°C	T _{amb, min}



to the product detail page

MPC 250 D2 T40

157209

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Number of poles (1)		2.000000		num polesw1
Connection	Δ	Y		wiringw1
Connection (wiring 2)	Y			wiringw2
Rated voltage	230	460	V	U _{rated, f1}
Rated voltage (wiring 2)	400		V	U _{rated, f2}
Rated current	2.07	1.07	A	I _{rated, f1}
Rated current (wiring 2)	1.19		A	I _{rated, f2}
Shaft power	550	550	W	P _{out, f1}
Shaft power (wiring 2)	550		W	P _{out, f2}
Speed	2770	3415	1/min	n _{f1}
Speed (wiring 2)	2770		1/min	n _{f2}
Starting current	122	7.81	A	I _{start, f1}
Starting current (wiring 2)	70.2		A	I _{start, f2}
Efficiency	77.8	77	%	$\eta_m, f1$
Efficiency (wiring 2)	77.8		%	$\eta_m, f2$
Efficiency class	IE3	IE3		IE _{motor}
Min. temperature	-20	-20	°C	T _{motor, min}
Cos Phi	0.860000	0.840000		cos φ
UL-Certification motor		UL recognized		ULcert

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Fire resistance class	None		Fclass




to the product detail page

MPC 250 D2 T40

157209

ruck

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

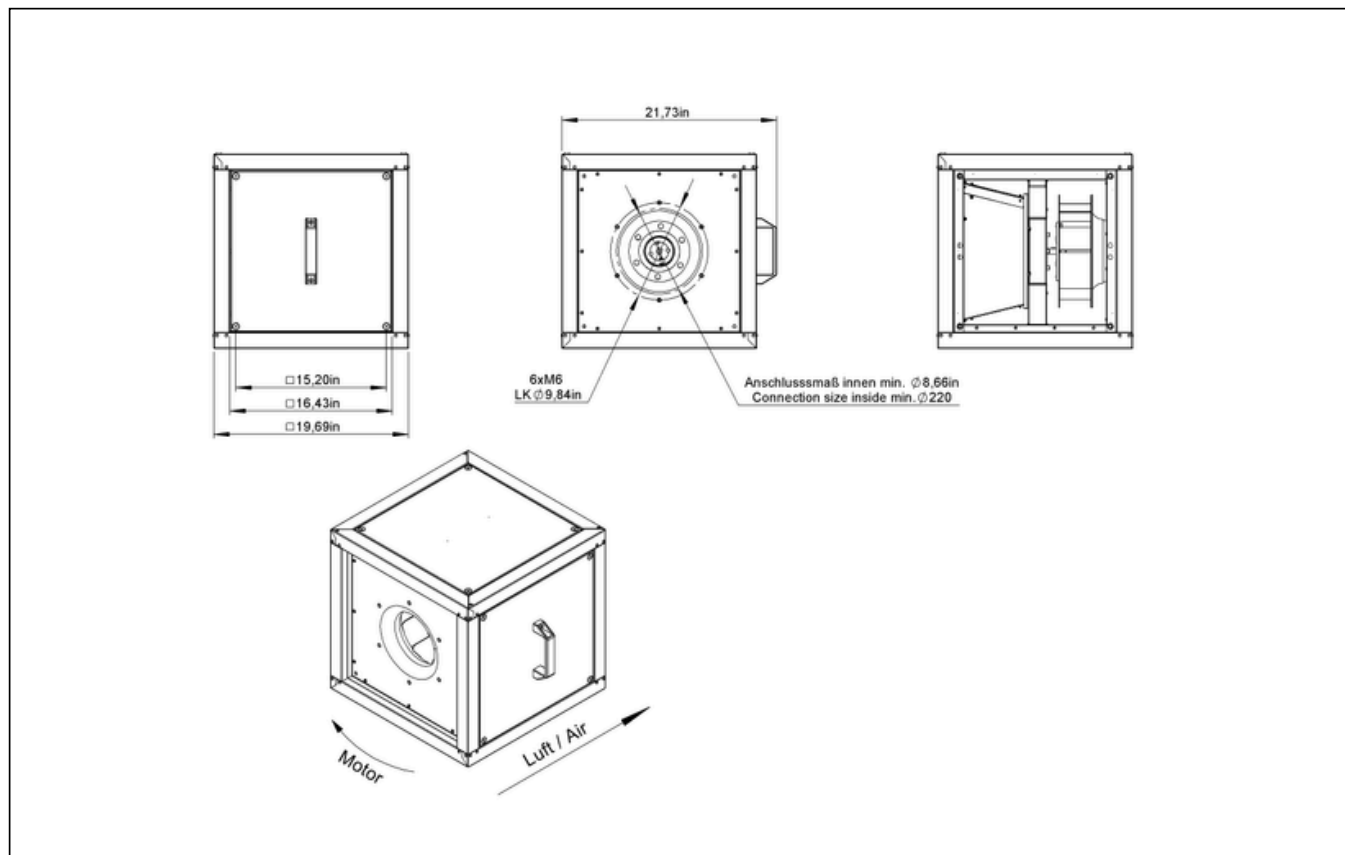


to the product detail page

MPC 250 D2 T40

157209


ruck

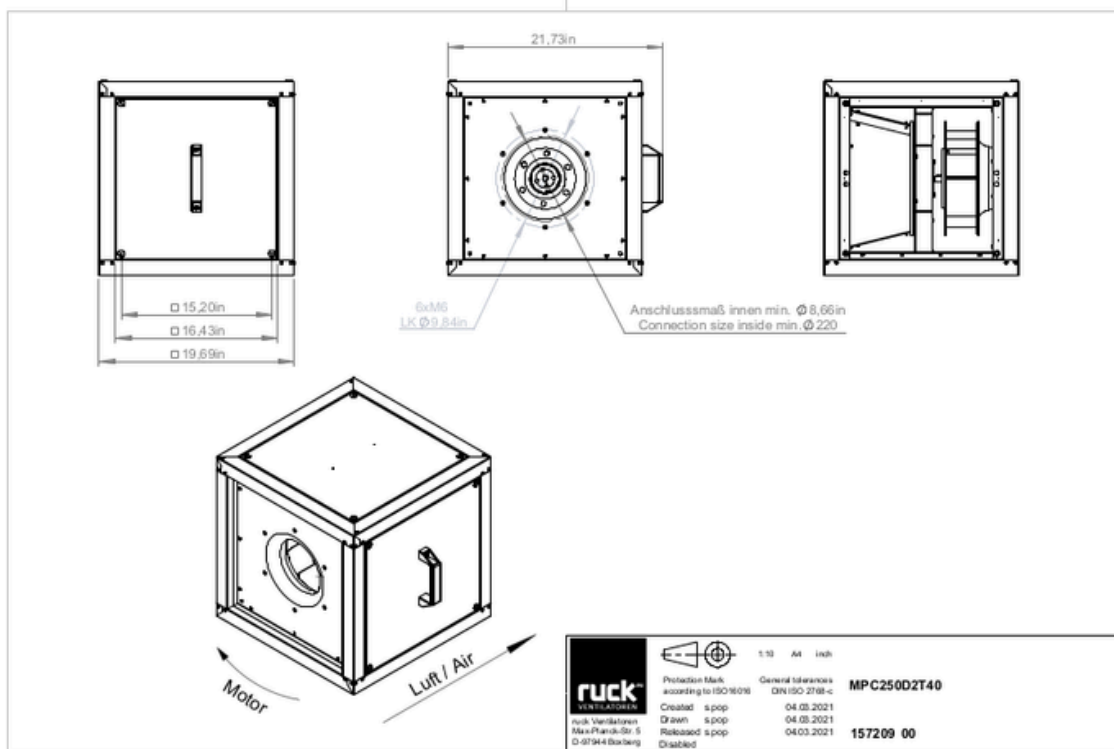

MPC 250 D2 T40

157209

ruck

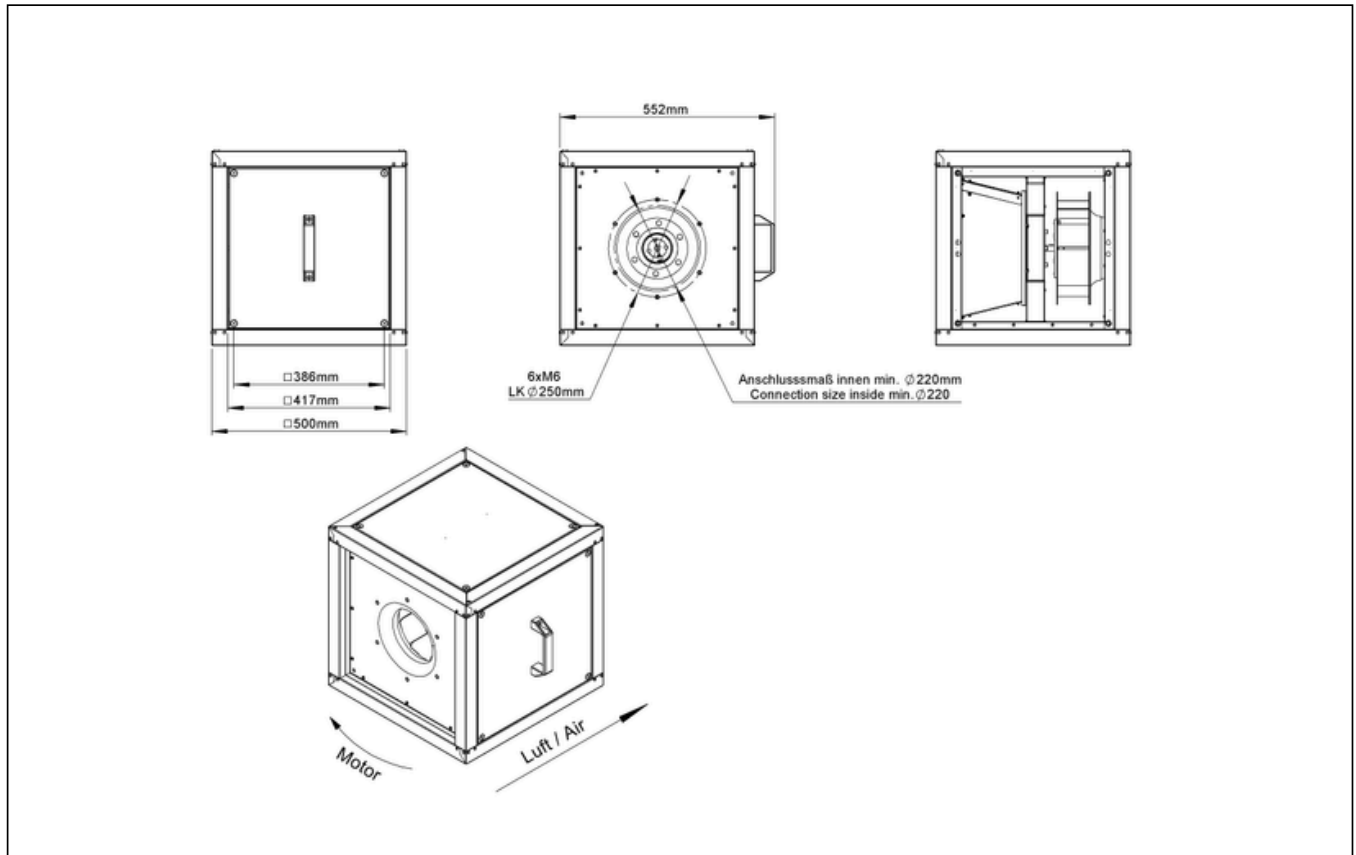


to the product detail page

MPC 250 D2 T40

157209

ruck

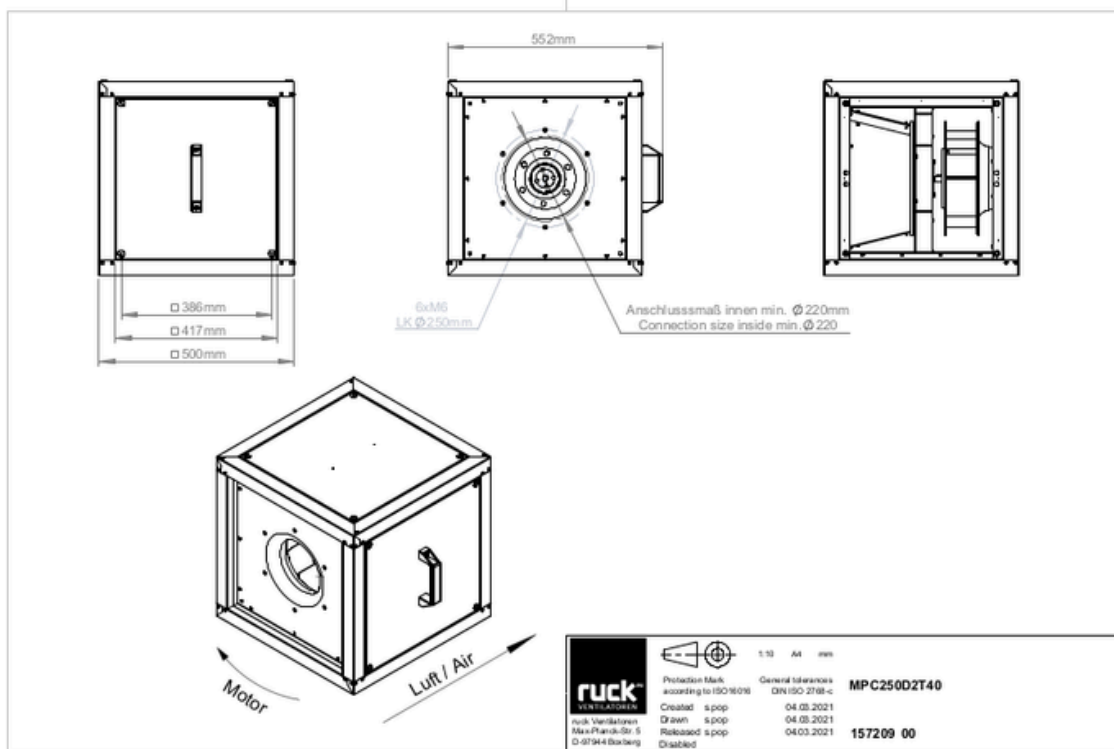


to the product detail page

MPC 250 D2 T40

157209

ruck

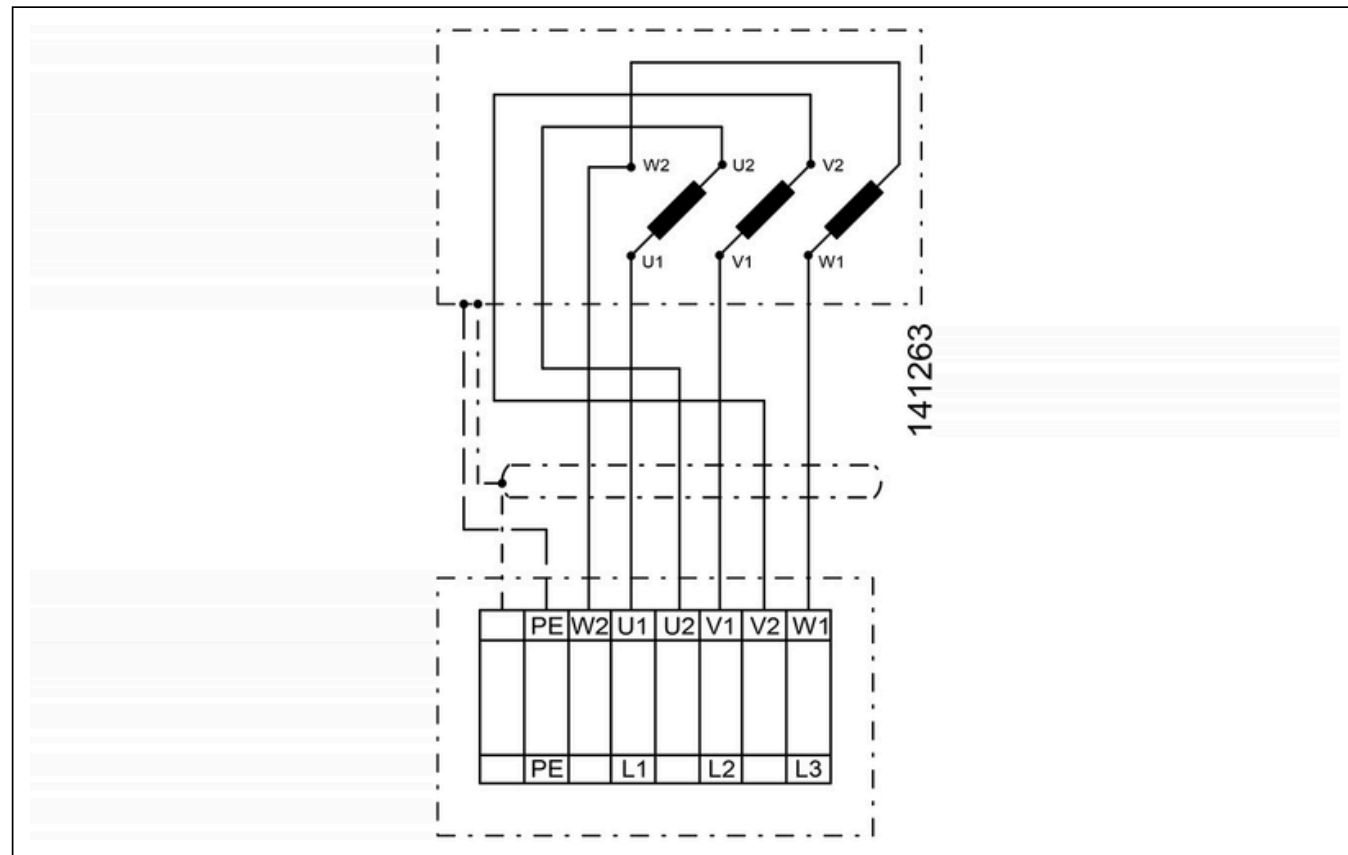

[to the product detail page](#)

MECHANICAL ACCESSORIES

FB 500 | 160864



- Air filter box for panel filter
- For MPC box 500
- For 1 or 2 filter (not included)
- Housing made of galvanized sheet steel

USM 500 315 | 107181



- Transition spigot
- Galvanized steel sheet
- Insulated

USM 500 355 | 107182



- Transition spigot
- Galvanized steel sheet
- Insulated

MB MPC 01 | 116411




- Motor protection shield
- Sendzimir galvanized sheet

GR MPC 01 | 123430



- Base frame für MPC
- Galvanized steel sheet

UCP 500 | 142567



- Closed panel
- Galvanized steel sheet

UQR 500 315 01 | 136201



- Transition duct/tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

UQR 500 250 01 | 136232



- Transition duct/tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

VM 250 | 102651



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

VM 355 | 102653



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

AS MPC 250 | 140836



- Inlet spigot
- Galvanized steel sheet

AS MPC 315 | 140844



- Inlet spigot
- Galvanized steel sheet

AS MPC 355 | 140956



- Inlet spigot
- Galvanized steel sheet

WSH MPC 01 | 123431



- Weather protection hood
- Galvanized steel sheet

WSG MPC 500 | 140741



- Weather protection grille
- Galvanized steel sheet

RD MPC 500 | 140073



- Rain cover for outdoor installation
- Galvanized steel sheet

VM 315 | 102652



to the product detail page

MPC 250 D2 T40

157209



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- Umax = 400 V, Imax = 25 A
- Switching capacity 400 V 3~ = 5,5 kW
- Protection class IP 55

MS 01 | 140407



- Motor protection switch with Isolator switchfunktion
- Imax = 400 V, 50/60 Hz
- Max. 0.55 kW
- Protection class IP 55

MTP 20 | 128146



- Potentiometer 10 kΩ
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 kΩ
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage +10 Vdc

MTP 40 | 147359



- Potentiometer 10 kΩ
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

FU 075 09 | 141837



- Frequency converter
- Supply voltage 230 V 1~ 50/60 Hz
- Output voltage 0 - 230 V 3~
- Protection class IP 20, for switch cabinet

FU 075 15 | 141848



- Frequency converter IP66
- Supply voltage 230 V 1~ 50/60 Hz
- Output voltage 0 - 230 V 3~
- Fire mode function (smoke extract fans)

FU 075 21 | 141859



- Frequency converter
- Supply voltage 400 V 3~ 50/60 Hz
- Output voltage 0 - 400 V 3~
- Protection class IP 20, for switch cabinet

FU 075 27 | 141870



- Frequency converter
- Supply voltage 400 V 3~ 50/60 Hz
- Output voltage 0 - 400 V 3~
- Fire mode function (smoke extract fans)

MTP 50 | 153133



- Potentiometer with multifunction output
- 230 VAC ±10 % / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable



to the product detail page