

DHA 250 E4P 02


129984

- Horizontal discharge radial fan
- Backward curved radial impeller
- Hinged housing made of weather resistant plastic ASA
- Robust single phase AC motor, voltage controllable
- Integrated thermal switch
- Integrated device switch



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

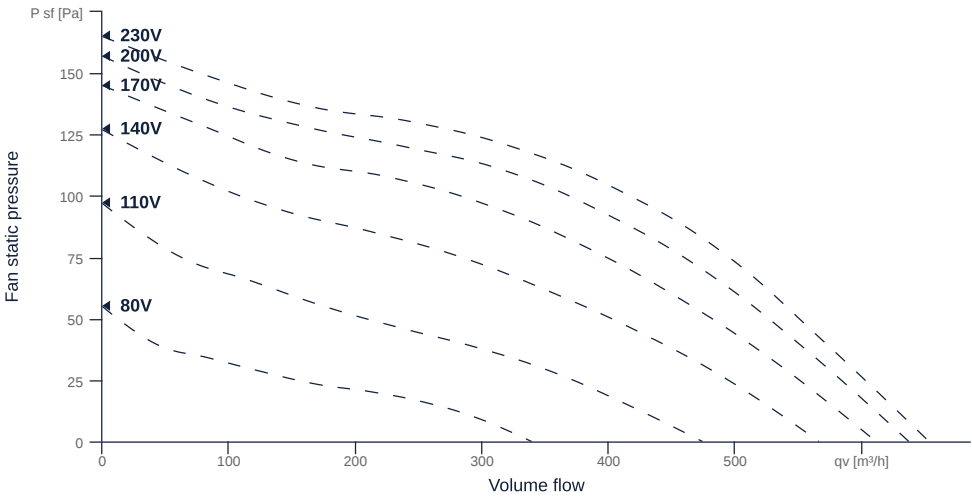

to the product detail page

DHA 250 E4P 02

129984

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN180		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Plastic		mat _{casing}
Impeller material	Galvanized steel		mat _{impeller}
IP-protection class (casing)	IP44		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP54		IP _{ebox}
Weight	5.55	kg	m
Nominal air flow rate, nominal point m³/h	464.4	m³/h	q _{v,nom}
Nominal external pressure, static	70	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.13	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.04	kW	P _{e,nom}
Face velocity, nominal point	1.8	m/s	v _{nom}
Nominal external pressure, static	70	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	19.2	%	η _{es,SUP}
Enclosure sound level, nominal point	68	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



to the product detail page

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	53	64	W	P _{ed, max}
Max. operating current (device)	0.32	0.36	A	I _{ed, max}
Max. speed	1350	1570	1/min	n _{max}
Max. stat. efficiency	21.2	24.1	%	η _{es}
Max. fan efficiency	21.4	24.4	%	η _e
Max. flowrate	650	740	m³/h	Q _{v, max}
Max. stat pressure	165	220	Pa	p _{sf, max}
Max. medium temperature	65	65	°C	T _{m, max}
Max. environment temperature	65	65	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}
Min. voltage	80	80	V	U _{min}
Stall current	0.35	0.35	A	I _{LRA}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP33		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwr _{sup} motor
Capacity capacitor		2	μF	C _{cond}
Voltage capacitor		450	V	VU _{cond}
Number of poles (1)		4.000000		num poles _{w1}
Rated voltage	230		V	U _{rated, f1}
Rated current	0.28		A	I _{rated, f1}
Speed	1454		1/min	n _{f1}
Min. temperature	-30		°C	T _{motor, min}
Cos Phi	0.990000	0.000000		cos φ
UL-Certification motor		None		ULcert



to the product detail page

DHA 250 E4P 02

129984

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS



MECHANICAL ACCESSORIES

DVK 180 10 | 153000



- Automatic roof shutter
- Galvanized steel sheet

DAF 150 | 110735



- Roof inlet flange
- Galvanized steel sheet

DAF 180 | 110744



- Roof inlet flange
- Galvanized steel sheet

DAS 180 | 110745



- Flexible roof inlet spigot
- Temperature resistant up to 75 °C

DAF 160 | 137396




- Roof inlet flange
- Galvanized steel sheet

DSF 220-10 | 126170




- Flat roof socket
- Made of aluminum AlMg3
- Sound and heat insulation

DSF 220-12 | 133709



- Sloped roof socket
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

DAP 220 | 133946



- Adapter plate for roof mounting of roof fans
- Galvanized steel sheet

DSS 220-10 | 126356



- Flat roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation

DSS 220-12 | 134283



- Sloped roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°



to the product detail page

DHA 250 E4P 02

129984

ELECTRICAL ACCESSORIES

GS 01 | 102787



- Isolator switch
- $U_{max} = 400 \text{ V}$, 50/60 Hz
- Switching capacity 400 V 3~ = 5,5 kW
- $I_{max} = 16 \text{ A}$

TES 0145 | 111858



- Step transformer
- 230 V ~, 50/60 Hz

TEE 015 | 115893



- 5-step transformer
- 230 V ~, 50/60 Hz



to the product detail page