

DHA 280 E4P 30


130107

- Horizontal discharge radial fan
- Backward curved impeller
- Housing made of aluminium AlMg3
- Robust single phase AC motor, voltage controllable
- Integrated thermal switch
- Integrated device switch



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

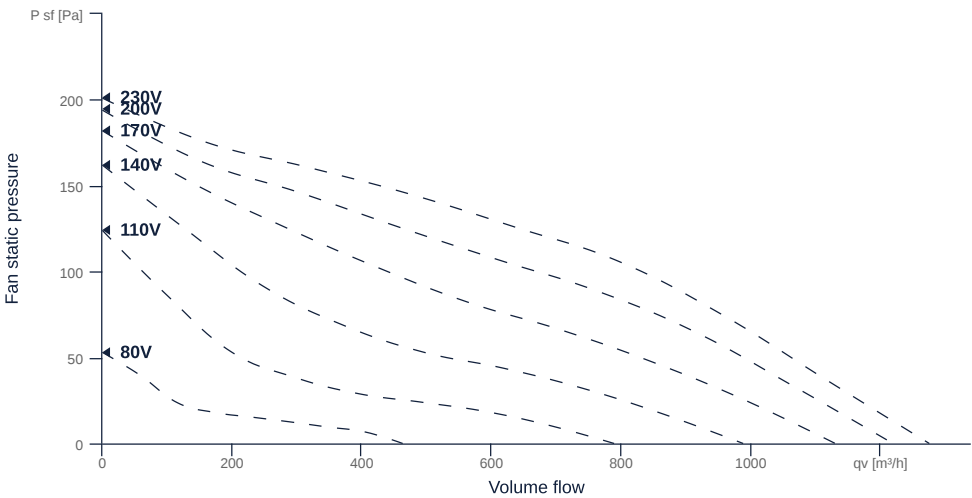

to the product detail page

DHA 280 E4P 30

130107

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN250		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		mat _{casing}
Impeller material	Galvanized steel		mat _{impeller}
IP-protection class (casing)	IP44		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	8.23	kg	m
Nominal air flow rate, nominal point m³/h	846	m³/h	q _{v,nom}
Nominal external pressure, static	98	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.24	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.08	kW	P _{e,nom}
Face velocity, nominal point	20.2	m/s	v _{nom}
Nominal external pressure, static	98	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	29.9	%	η _{es,SUP}
Enclosure sound level, nominal point	71	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



to the product detail page

DHA 280 E4P 30

130107

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	86	109	W	P _{ed, max}
Max. operating current (device)	0.44	0.54	A	I _{ed, max}
Max. speed	1390	1620	1/min	n _{max}
Max. stat. efficiency	27.2	25.3	%	η _{es}
Max. fan efficiency	27.9	25.7	%	η _e
Max. flowrate	1270	1450	m³/h	Q _{v, max}
Max. stat pressure	200	270	Pa	p _{sf, max}
Max. medium temperature	70	70	°C	T _{m, max}
Max. environment temperature	70	70	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}
Min. voltage	80	80	V	U _{min}
Stall current	0.57	0.57	A	I _{LRA}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)	50			f
Motor type	AC 1~			phase
Control type	stepless-controlled			ctrltype
Installation type	ORM (Out)			install
Rotation direction	right			rotation
Isolation class	ISO F			ISO _{class}
Motor-protection	TAI			protect _{motor}
Protection class	IP33			IP _{motor}
Is pole-changeable	No			polexch
Type of power supply	AC 1~			p _{wsup} _{motor}
Capacity capacitor	3		μF	C _{cond}
Voltage capacitor	450		V	V _{Ucond}
Number of poles (1)	4.000000			num poles _{w1}
Rated voltage	230		V	U _{rated, f1}
Rated current	0.48		A	I _{rated, f1}
Speed	1368		1/min	n _{f1}
Efficiency	51		%	η _{m, f1}
Min. temperature	-30		°C	T _{motor, min}
Cos Phi	0.990000	0.000000		cos φ
UL-Certification motor	None			UL _{cert}



DHA 280 E4P 30

130107

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS




MECHANICAL ACCESSORIES

DVK 250 10 | 152997



- Automatic roof shutter
- Galvanized steel sheet

DAS 250 | 109413



- Flexible roof inlet spigot
- Temperature resistant up to 75 °C

DAF 250 | 110585



- Roof inlet flange
- Galvanized steel sheet

DAF 200 | 110737



- Roof inlet flange
- Galvanized steel sheet

DSF 280-10 | 126164




- Flat roof socket
- Made of aluminum AlMg3
- Sound and heat insulation

DSF 280-12 | 133736



- Sloped roof socket
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

DAP 280 | 133954



- Adapter plate for roof mounting of roof fans
- Galvanized steel sheet

DSS 280-10 | 126383



- Flat roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation

DSS 280-12 | 134357



- Sloped roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°



to the product detail page

DHA 280 E4P 30

130107

ELECTRICAL ACCESSORIES

TES 0145 | 111858



- Step transformer
- 230 V ~, 50/60 Hz

TEE 015 | 115893



- 5-step transformer
- 230 V ~, 50/60 Hz



to the product detail page