

DVA 190 EC O RK 01


165142

- Backward curved radial impeller
- Vertical discharge
- Hinged housing made of aluminium AlMg3
- High efficiency EC motor, steplessly controllable
- Conveying medium temperature up to 50 °C in continuous operation
- repair switch



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

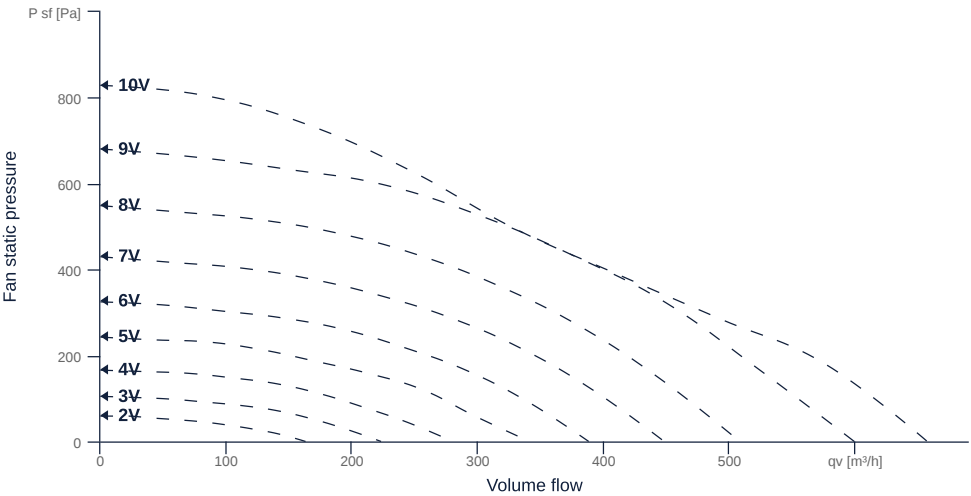

to the product detail page

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (casing)	IP44		IP _{casing}
Weight	5.5	kg	m
Nominal air flow rate, nominal point m³/h	349.2	m³/h	q _{v,nom}
Nominal external pressure, static	475.8	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.1	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.11	kW	P _{e,nom}
Face velocity, nominal point	2.9	m/s	V _{nom}
Nominal external pressure, static	475.8	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	48.2	%	η _{es,SUP}
Enclosure sound level, nominal point	82	dB(A)	L _{WA2}
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	114	114	W	P _{ed, max}
Max. operating current (device)	0.9	0.9	A	I _{ed, max}
Max. speed	4010	4010	1/min	n _{max}
Max. stat. efficiency	41.6	41.6	%	η _{es}
Max. fan efficiency	42.1	42.1	%	η _e
Max. flowrate	660	660	m³/h	q _{v, max}
Max. stat pressure	830	830	Pa	p _{sf, max}
Max. medium temperature	50	50	°C	T _{m, max}
Max. environment temperature	50	50	°C	T _{amb, max}
Min. environment temperature	-20	-20	°C	T _{amb, min}



to the product detail page

DVA 190 EC O RK 01


165142



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP54		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Min. temperature	-30		°C	Tmotor, min
Cos Phi	0.560000	0.000000		cos φ
UL-Certification motor		None		ULcert

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

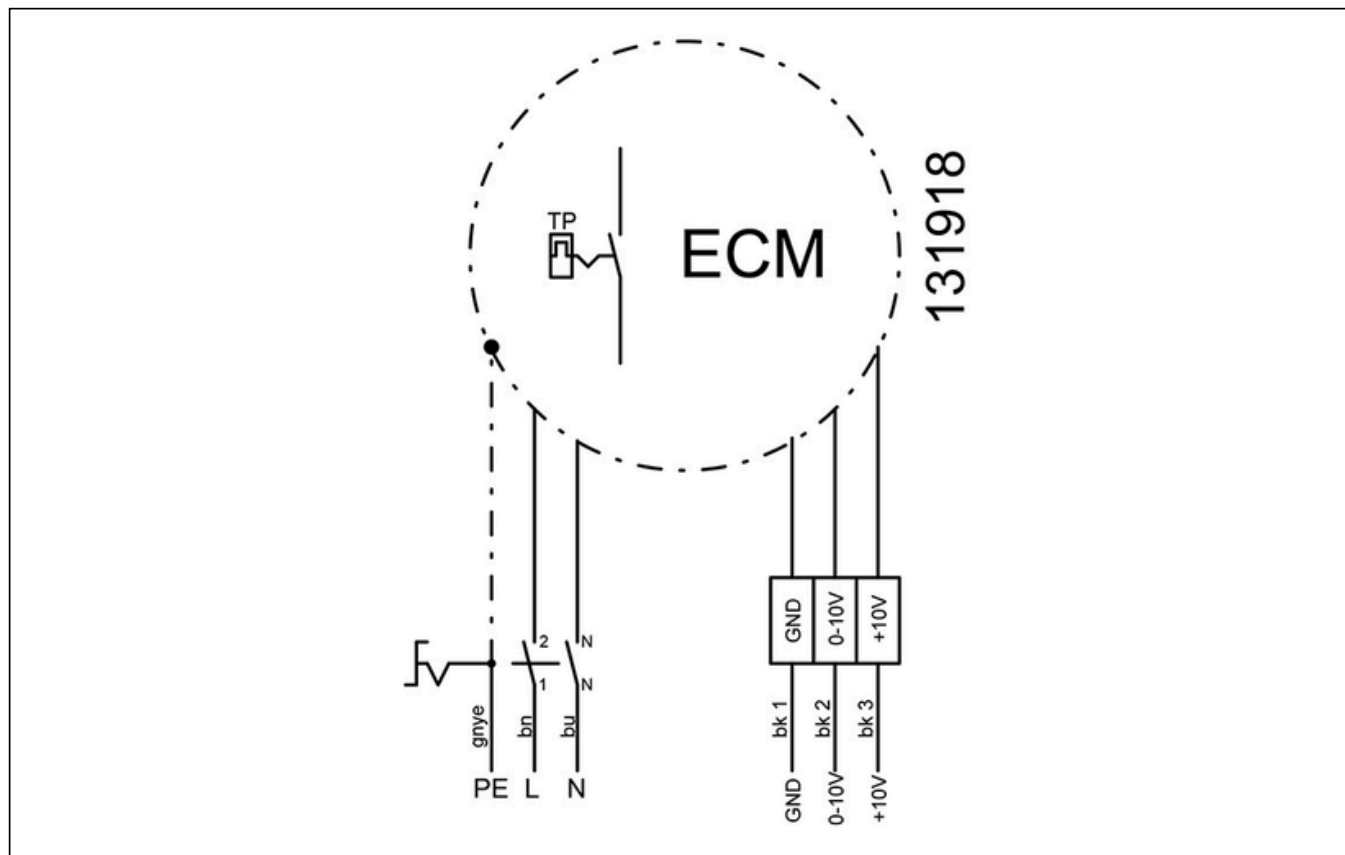


to the product detail page

DVA 190 EC O RK 01

165142

ruck

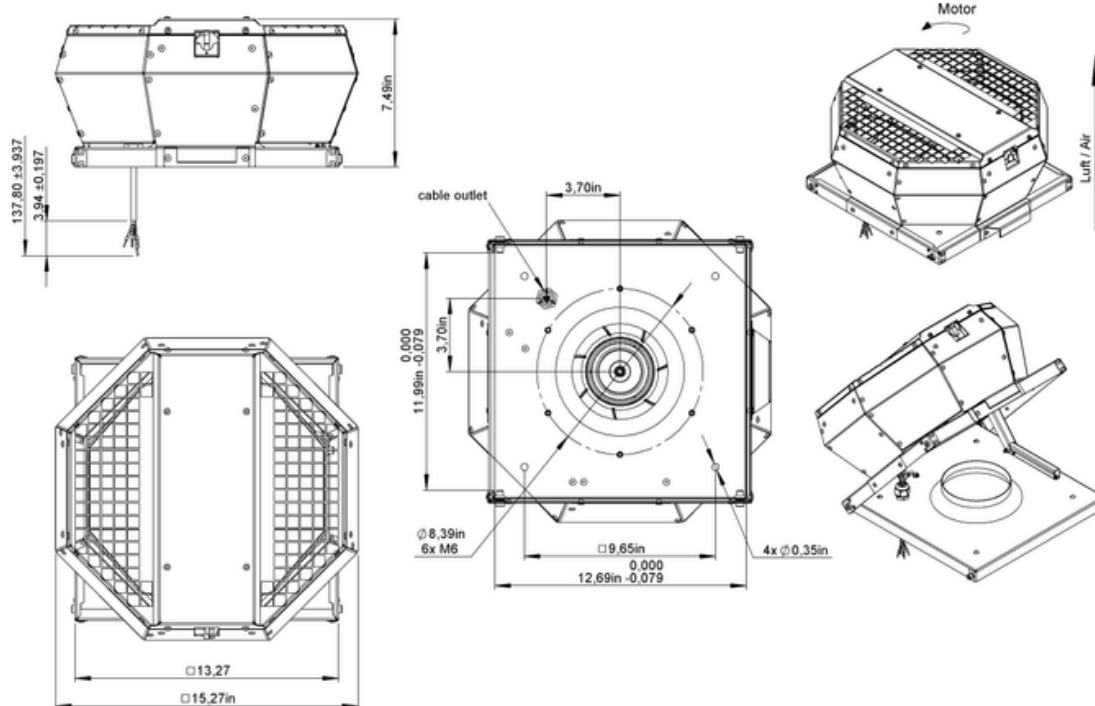

165142 00




to the product detail page

DVA 190 EC O RK 01

165142

ruck

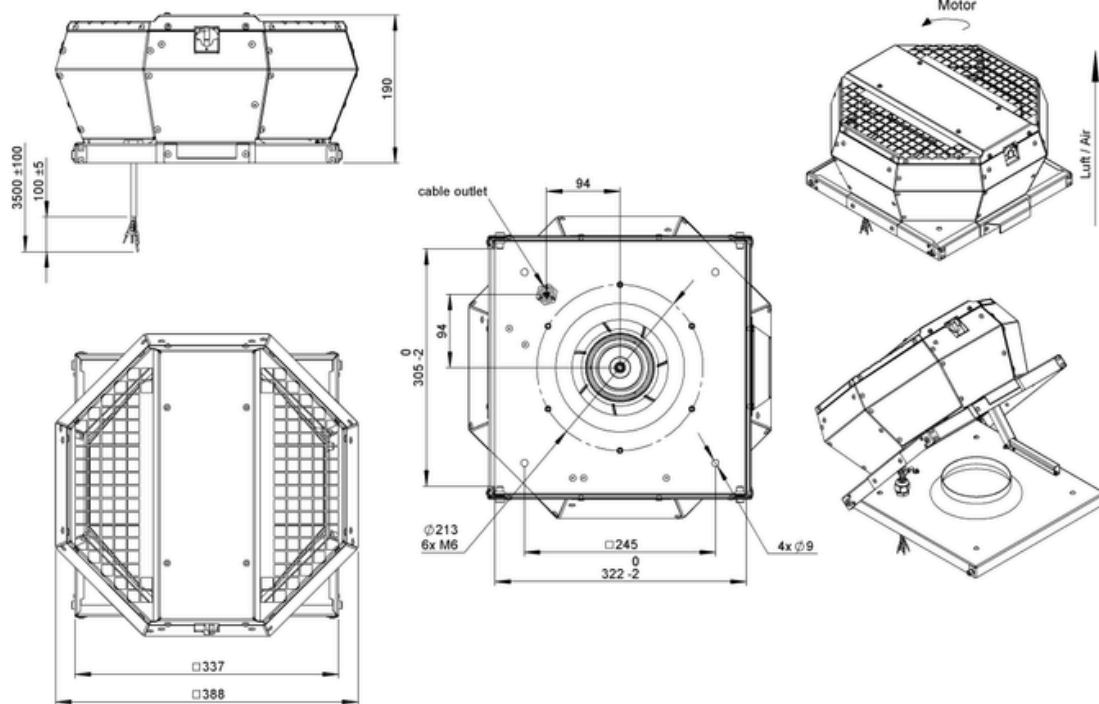

165142 00




to the product detail page

DVA 190 EC O RK 01

165142

ruck

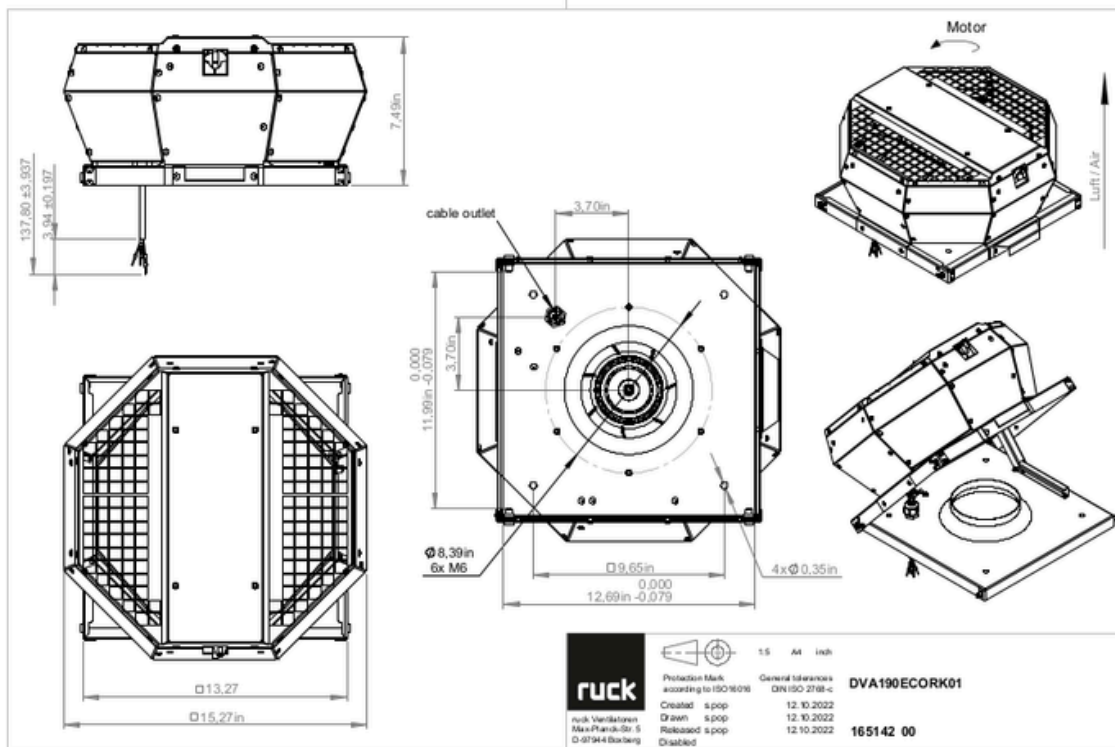


to the product detail page

DVA 190 EC O RK 01

165142

ruck

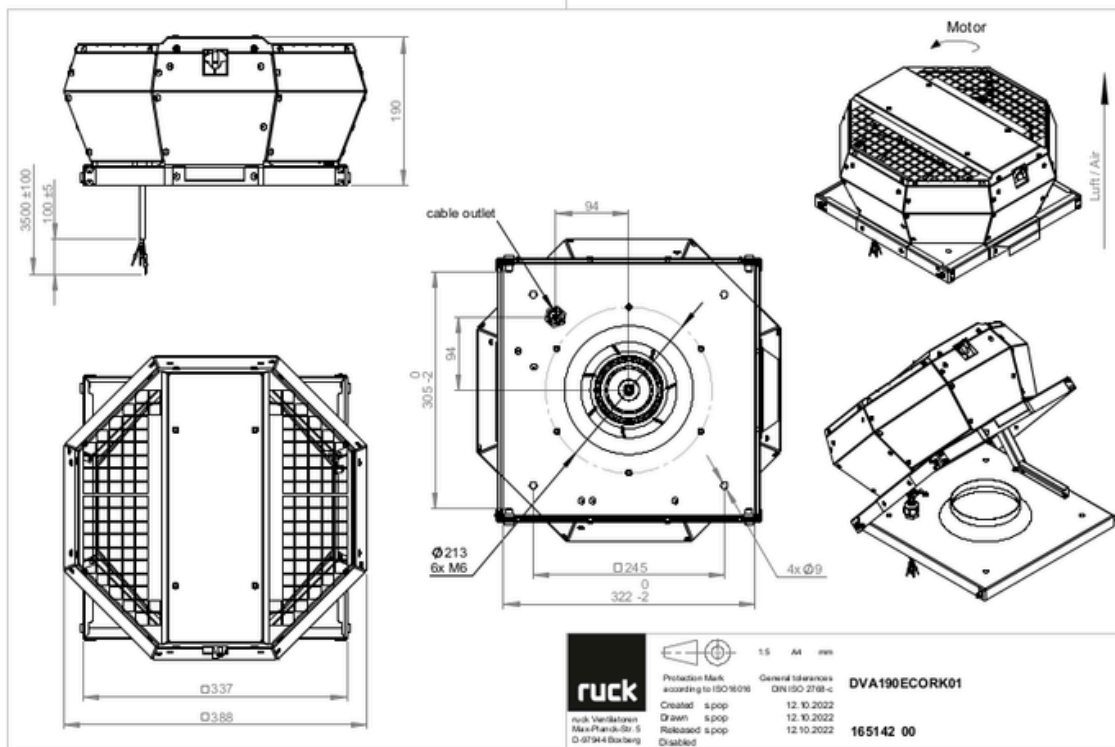

MECHANICAL ACCESSORIES

DVK 180 10 | 153000



- Automatic roof shutter
- Galvanized steel sheet

DAF 150 | 110735




- Roof inlet flange
- Galvanized steel sheet

DAF 180 | 110744



- Roof inlet flange
- Galvanized steel sheet

DAS 180 | 110745



- Flexible roof inlet spigot
- Temperature resistant up to 75 °C

DAF 160 | 137396



- Roof inlet flange
- Galvanized steel sheet

DSF 220-10 | 126170




- Flat roof socket
- Made of aluminum AlMg3
- Sound and heat insulation

DSF 220-12 | 133709



- Sloped roof socket
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

DAP 220 | 133946



- Adapter plate for roof mounting of roof fans
- Galvanized steel sheet

DSS 220-10 | 126356



- Flat roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation

DSS 220-12 | 134283



- Sloped roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°



to the product detail page

ELECTRICAL ACCESSORIES

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage+10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 50 | 153133



- Potentiometer with multifunction output
- 230 VAC $\pm$ 10 % / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable



to the product detail page