

DVA 220 E2P 31


139339

- Backward curved radial impeller
- Vertical discharge
- Housing made of aluminum AlMg3
- Robust single phase AC motor, steplessly controllable
- Conveyed medium temperature up to 60 °C in continuous operation
- Integrated device switch



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

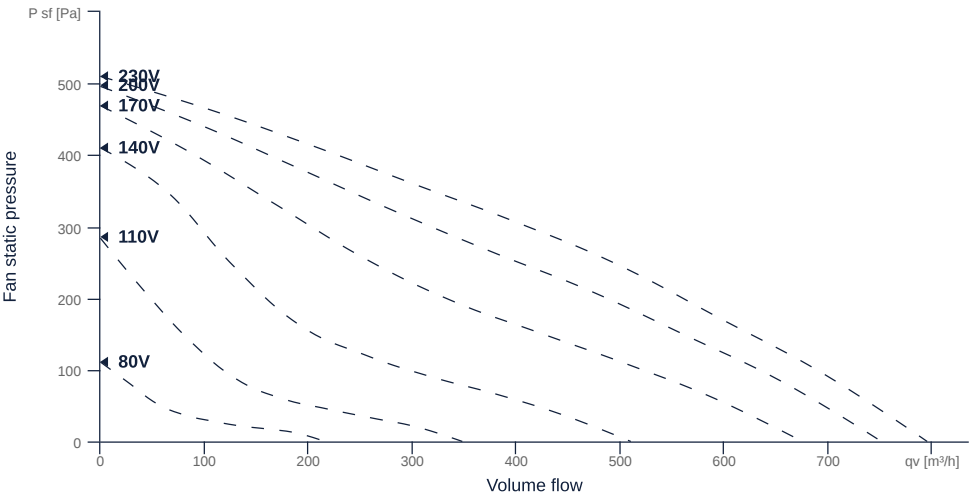

to the product detail page

DVA 220 E2P 31

139339

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (casing)	IP44		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	5.45	kg	m
Nominal air flow rate, nominal point m³/h	547.2	m³/h	q _{v,nom}
Nominal external pressure, static	210	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.15	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.11	kW	P _{e,nom}
Face velocity, nominal point	3.68	m/s	v _{nom}
Nominal external pressure, static	210	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	30.6	%	η _{es,SUP}
Enclosure sound level, nominal point	73	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



DVA 220 E2P 31

139339

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	110	140	W	P _{ed, max}
Max. operating current (device)	0.55	0.67	A	I _{ed, max}
Max. speed	2780	3225	1/min	n _{max}
Max. stat. efficiency	30.5	24.8	%	η _{es}
Max. fan efficiency	31.1	25.2	%	η _e
Max. flowrate	800	800	m³/h	Q _{v, max}
Max. stat pressure	510	680	Pa	p _{sf, max}
Max. medium temperature	60	55	°C	T _{m, max}
Max. environment temperature	60	55	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}
Min. voltage	80	80	V	U _{min}
Stall current	0.77	0.77	A	I _{LRA}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)	50			f
Motor type	AC 1~			phase
Control type	stepless-controlled			ctrltype
Installation type	ORM (Out)			install
Rotation direction	right			rotation
Isolation class	ISO F			ISO _{class}
Motor-protection	TAI			protect _{motor}
Protection class	IP33			IP _{motor}
Is pole-changeable	No			polexch
Type of power supply	AC 1~			p _{wsup} _{motor}
Capacity capacitor	2.5		μF	C _{cond}
Voltage capacitor	450		V	V _{Ucond}
Number of poles (1)	2.000000			num poles _{w1}
Rated voltage	230		V	U _{rated, f1}
Rated current	0.43		A	I _{rated, f1}
Speed	2390		1/min	n _{f1}
Efficiency	47.3		%	η _{m, f1}
Min. temperature	-30		°C	T _{motor, min}
Cos Phi	0.980000	0.000000		cos φ
UL-Certification motor	None			UL _{cert}




to the product detail page

DVA 220 E2P 31

139339

ruck

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

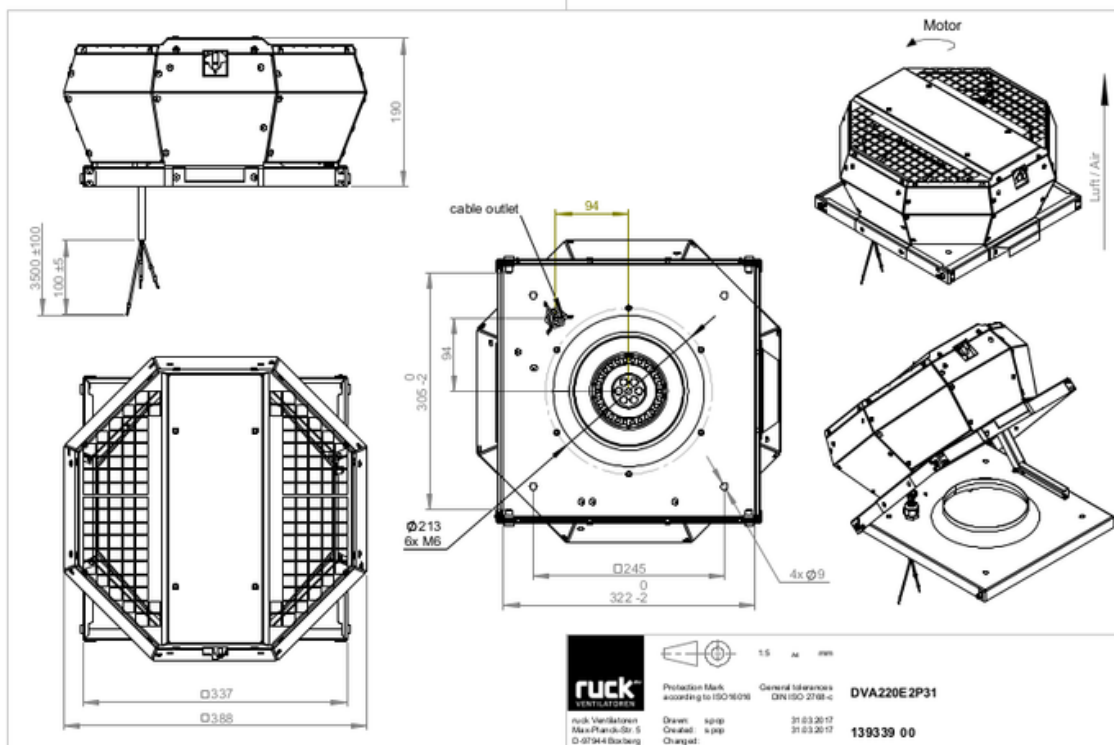


to the product detail page

DVA 220 E2P 31

139339

ruck

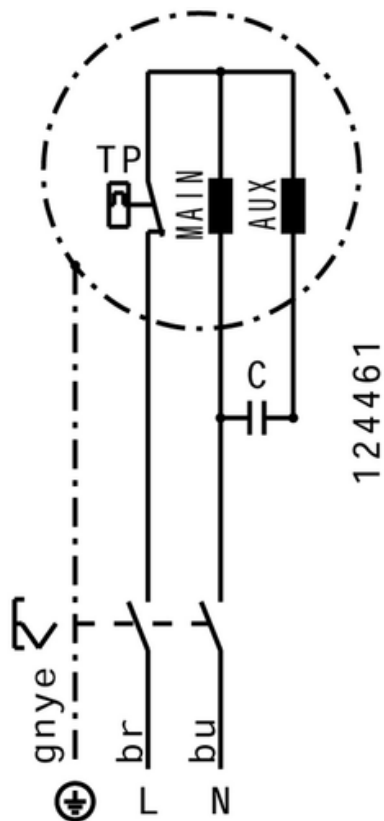


to the product detail page

DVA 220 E2P 31

139339

ruck

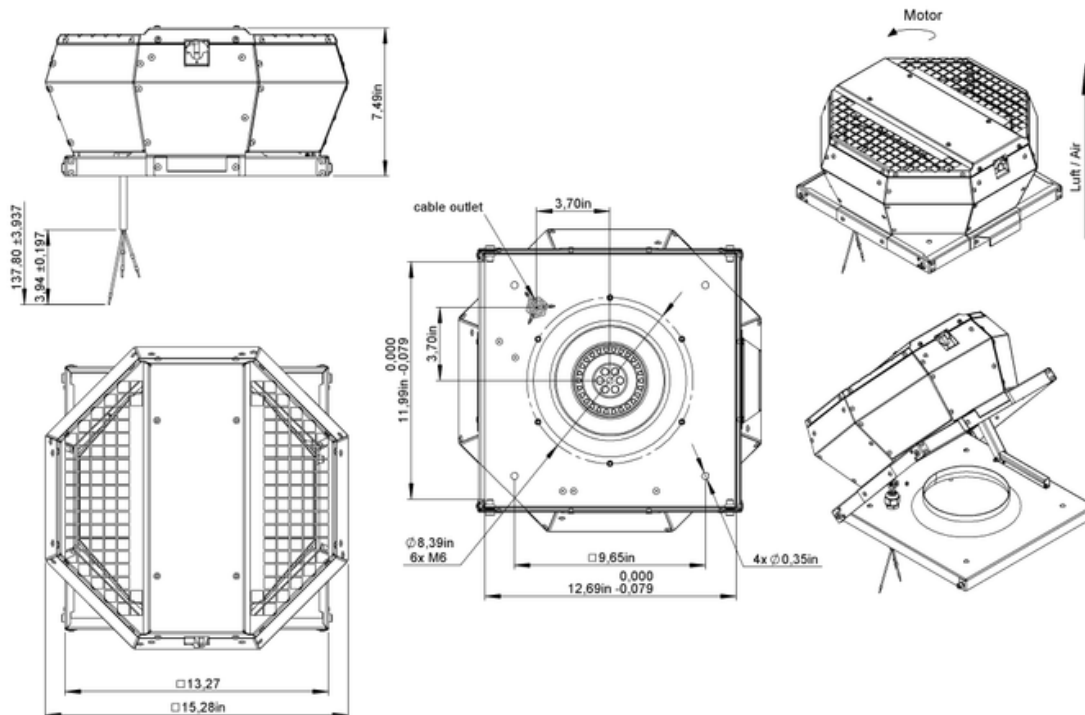

139339 00




to the product detail page

DVA 220 E2P 31

139339

ruck

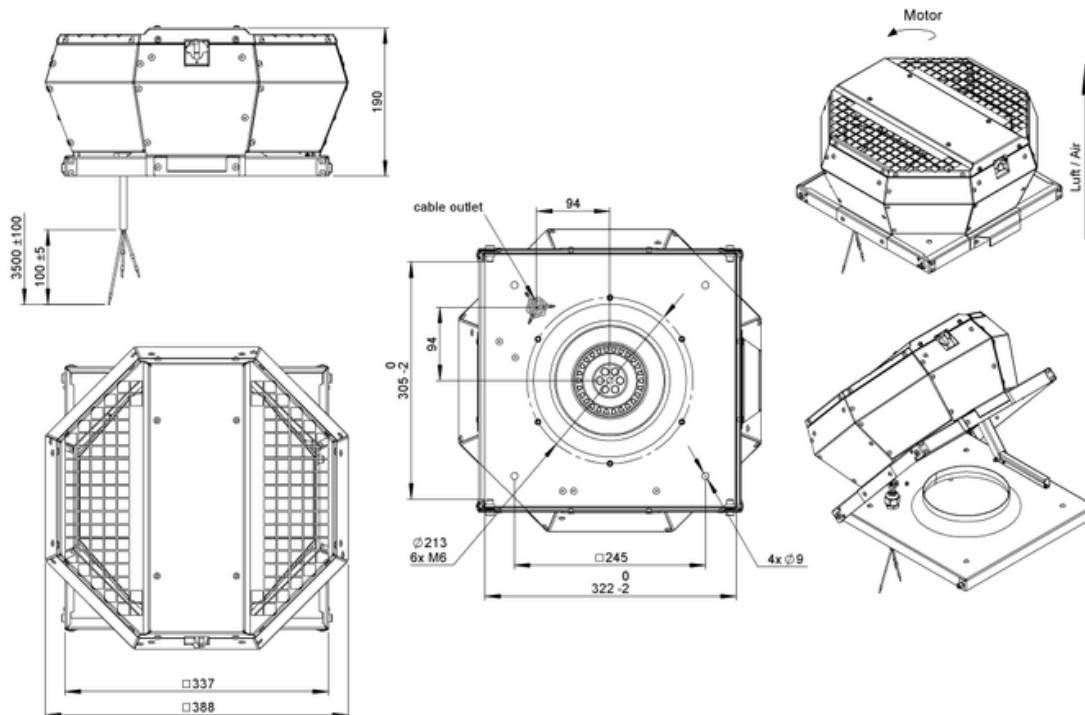

139339 00




to the product detail page

DVA 220 E2P 31

139339

ruck

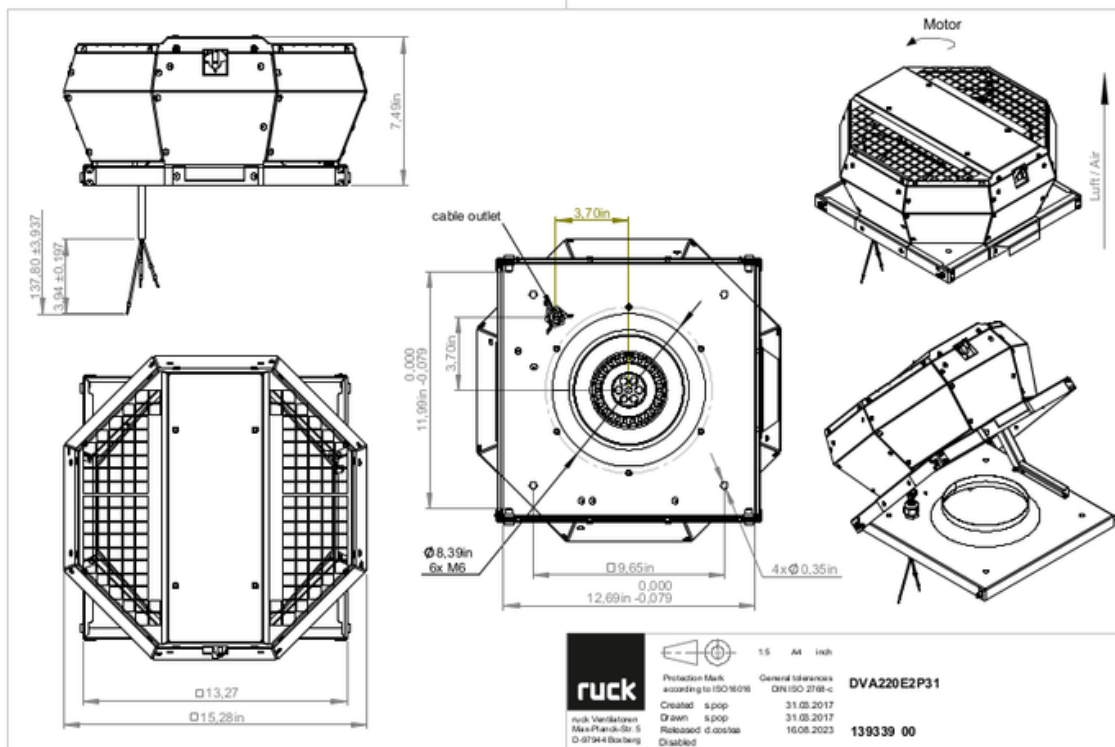

MECHANICAL ACCESSORIES

DVK 180 10 | 153000



- Automatic roof shutter
- Galvanized steel sheet

DAF 150 | 110735



- Roof inlet flange
- Galvanized steel sheet

DAF 180 | 110744



- Roof inlet flange
- Galvanized steel sheet

DAS 180 | 110745



- Flexible roof inlet spigot
- Temperature resistant up to 75 °C

DAF 160 | 137396



- Roof inlet flange
- Galvanized steel sheet

DSF 220-10 | 126170




- Flat roof socket
- Made of aluminum AlMg3
- Sound and heat insulation

DSF 220-12 | 133709



- Sloped roof socket
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

DAP 220 | 133946



- Adapter plate for roof mounting of roof fans
- Galvanized steel sheet

DSS 220-10 | 126356



- Flat roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation

DSS 220-12 | 134283



- Sloped roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

ELECTRICAL ACCESSORIES

TES 0145 | 111858



- Step transformer
- 230 V ~, 50/60 Hz

TEE 015 | 115893



- 5-step transformer
- 230 V ~, 50/60 Hz



to the product detail page