

DVA 220 E4P 31


139334

- Backward curved radial impeller
- Vertical discharge
- Housing made of aluminum AlMg3
- Robust single phase AC motor, steplessly controllable
- Conveyed medium temperature up to 80 °C in continuous operation
- Integrated device switch



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

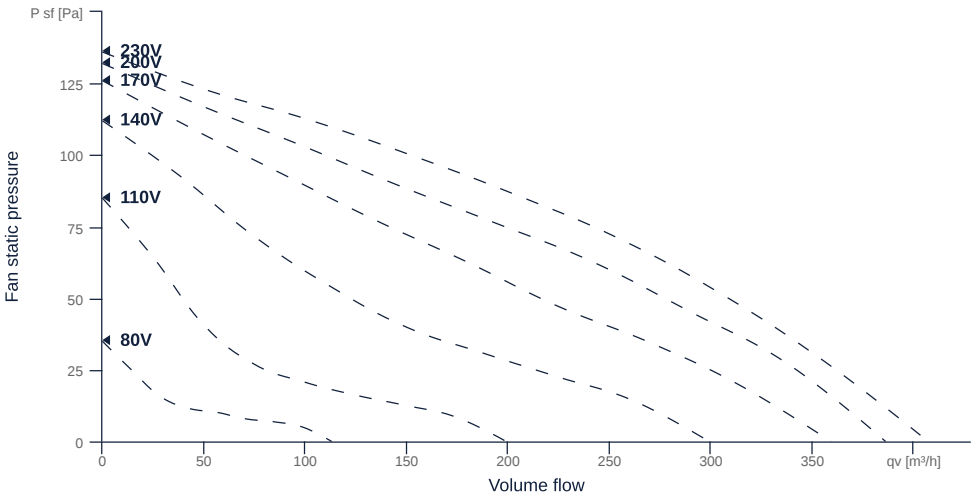

to the product detail page

DVA 220 E4P 31

139334

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (casing)	IP44		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
Weight	5.2	kg	m
Nominal air flow rate, nominal point m³/h	320.4	m³/h	q _{v,nom}
Nominal external pressure, static	44	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.09	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.02	kW	P _{e,nom}
Face velocity, nominal point	2.15	m/s	v _{nom}
Nominal external pressure, static	44	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	22	%	η _{es,SUP}
Enclosure sound level, nominal point	59	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



to the product detail page

DVA 220 E4P 31

139334

ruck

MAXIMAL DATA


Name	Value	Unit	Formula symbol
Max. power consumption (device)	21	W	$P_{ed, max}$
Max. operating current (device)	0.22	A	$I_{ed, max}$
Max. speed	1410	1/min	n_{max}
Max. stat. efficiency	22.7	%	η_{es}
Max. fan efficiency	23	%	η_e
Max. flowrate	410	m ³ /h	$q_{v, max}$
Max. stat pressure	140	Pa	$p_{sf, max}$
Max. medium temperature	80	°C	T_m, max
Max. environment temperature	80	°C	$T_{amb, max}$
Min. environment temperature	-25	°C	$T_{amb, min}$
Min. voltage	80	V	U_{min}
Stall current	0.17	A	I_{LRA}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP33		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Capacity capacitor		3	µF	Ccond
Voltage capacitor		400	V	VUcond
Number of poles (1)		4.000000		num polesw1
Rated voltage	230		V	$U_{rated, f1}$
Rated current	0.1		A	$I_{rated, f1}$
Speed	1291		1/min	n_{f1}
Efficiency	50.8		%	$\eta_m, f1$
Min. temperature	-30		°C	$T_{motor, min}$
Cos Phi	0.900000	0.000000		cos φ
UL-Certification motor		None		ULcert




CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

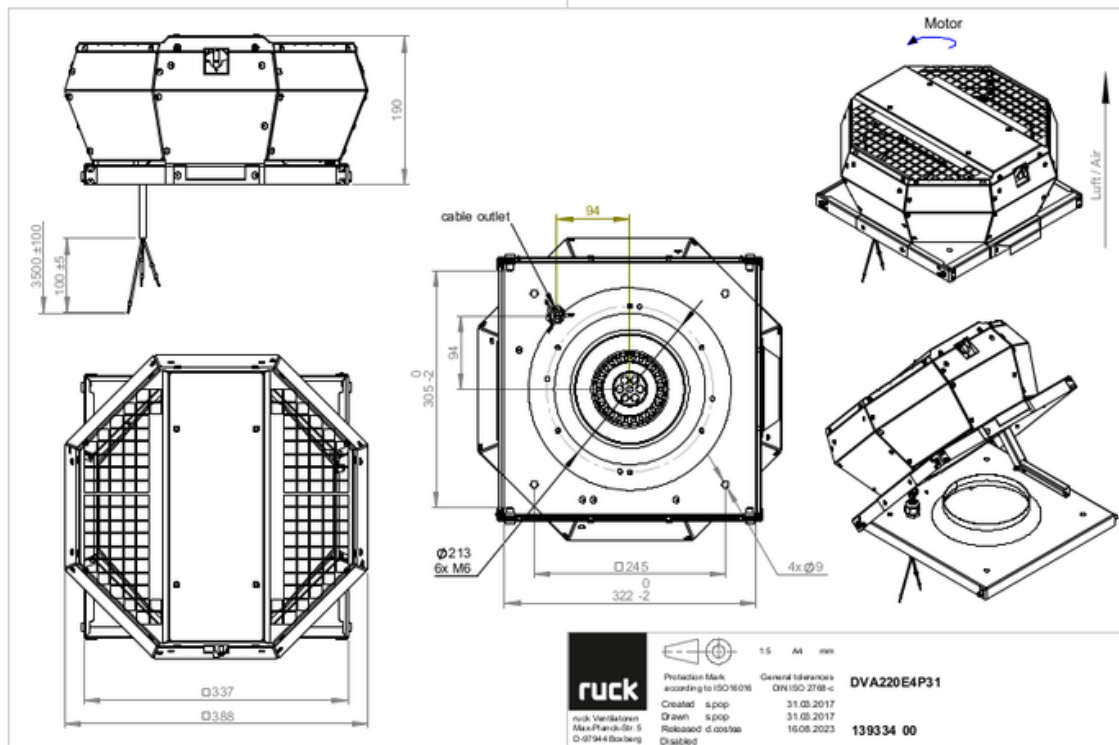

DVA 220 E4P 31

139334


ruck

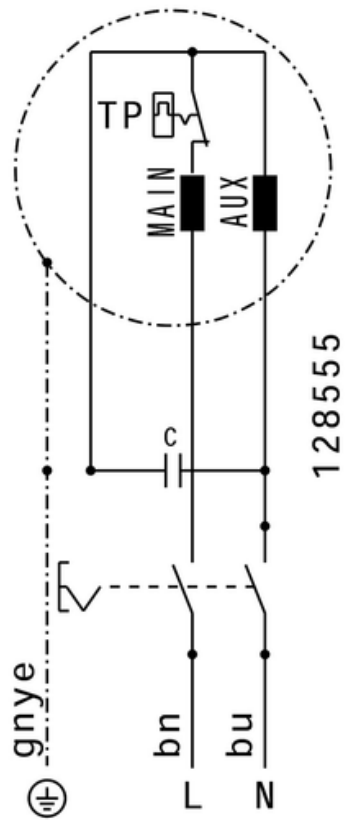

DVA 220 E4P 31

139334


ruck

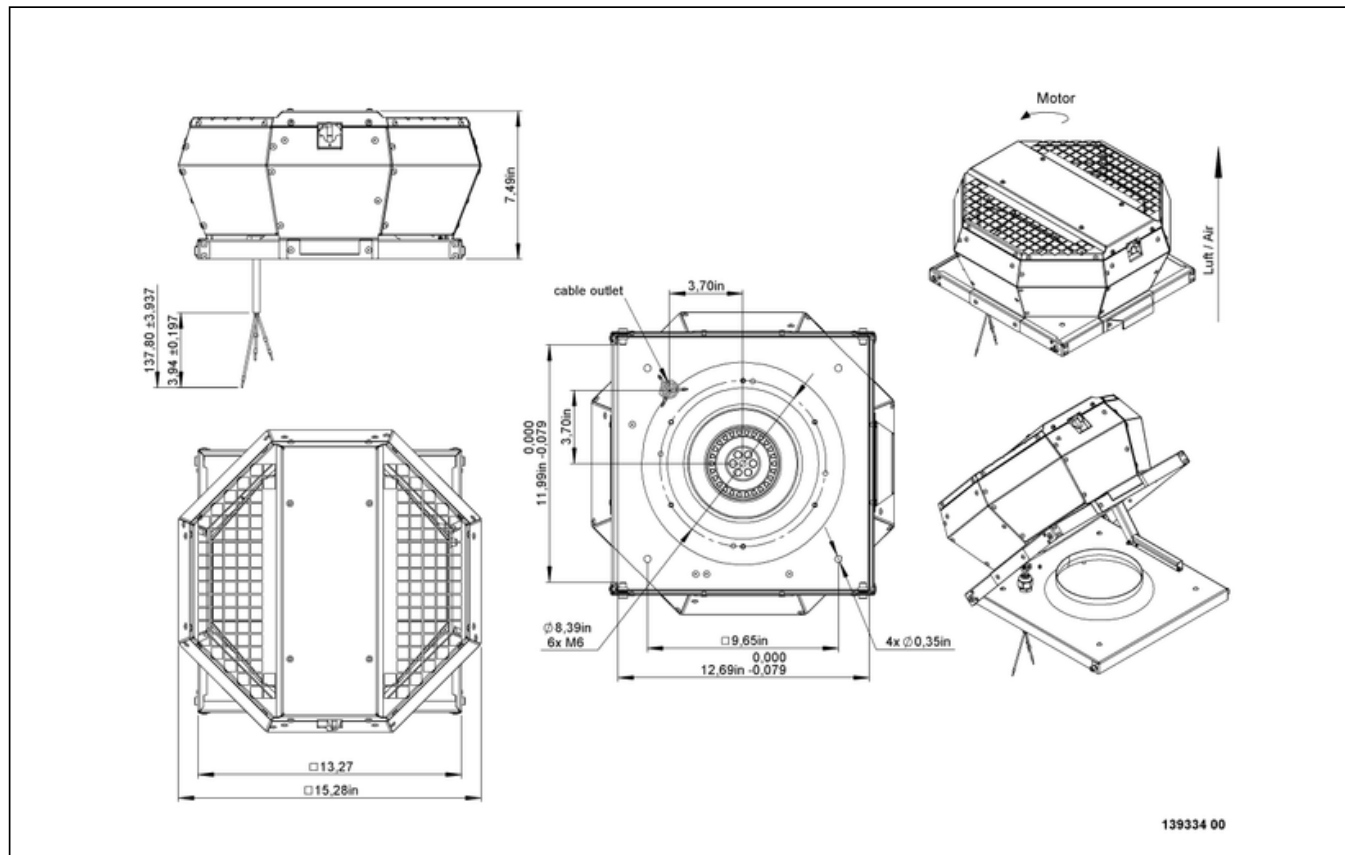

DVA 220 E4P 31

139334

ruck

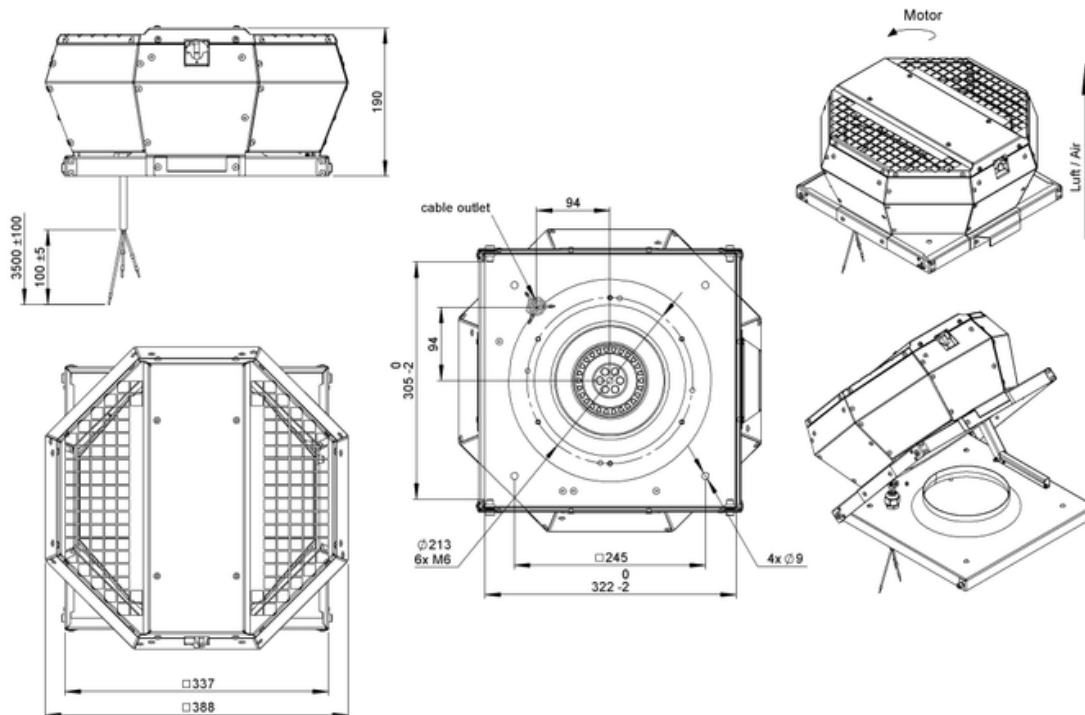

139334 00




to the product detail page

DVA 220 E4P 31

139334

ruck

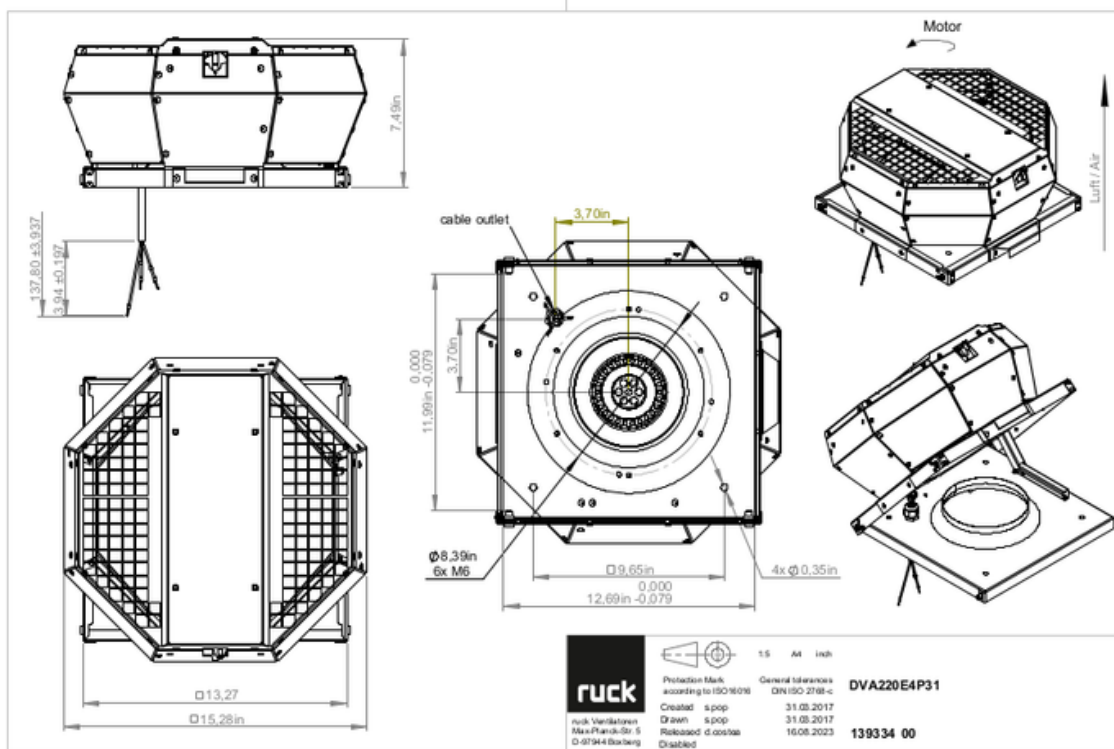

DVA 220 E4P 31

139334

MECHANICAL ACCESSORIES

DVK 180 10 | 153000



- Automatic roof shutter
- Galvanized steel sheet

DAF 150 | 110735




- Roof inlet flange
- Galvanized steel sheet

DAF 180 | 110744



- Roof inlet flange
- Galvanized steel sheet

DAS 180 | 110745



- Flexible roof inlet spigot
- Temperature resistant up to 75 °C

DAF 160 | 137396



- Roof inlet flange
- Galvanized steel sheet

DSF 220-10 | 126170




- Flat roof socket
- Made of aluminum AlMg3
- Sound and heat insulation

DSF 220-12 | 133709



- Sloped roof socket
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

DAP 220 | 133946



- Adapter plate for roof mounting of roof fans
- Galvanized steel sheet

DSS 220-10 | 126356



- Flat roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation

DSS 220-12 | 134283



- Sloped roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

ELECTRICAL ACCESSORIES

TES 0145 | 111858



- Step transformer
- 230 V ~, 50/60 Hz

TEE 015 | 115893



- 5-step transformer
- 230 V ~, 50/60 Hz



to the product detail page