

DVA 225 E2P 31


139332

- Backward curved radial impeller
- Vertical discharge
- Housing made of aluminum AlMg3
- Robust single phase AC motor, steplessly controllable
- Conveyed medium temperature up to 60 °C in continuous operation
- Integrated device switch



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

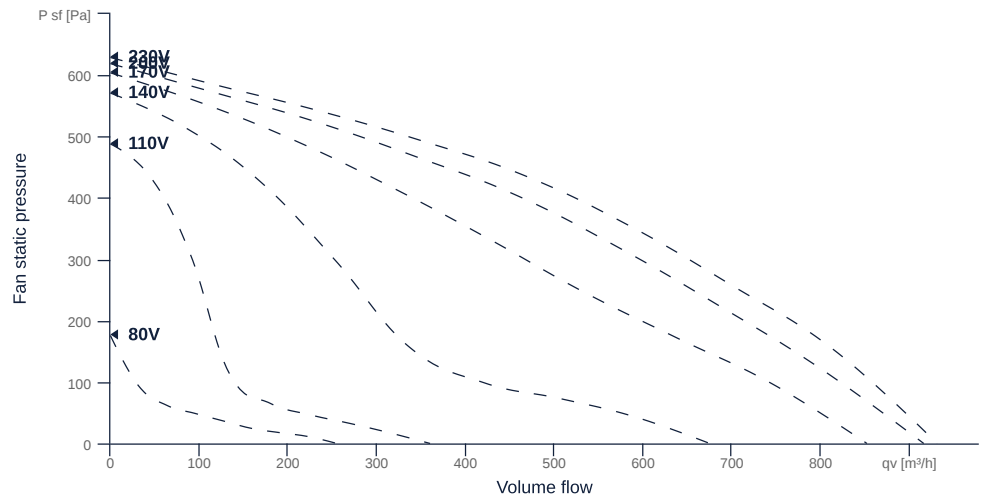

to the product detail page

DVA 225 E2P 31

139332

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (casing)	IP44		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
Weight	3.66	kg	m
Nominal air flow rate, nominal point m³/h	720	m³/h	q _{v,nom}
Nominal external pressure, static	243	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.2	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.15	kW	P _{e,nom}
Face velocity, nominal point	4.83	m/s	v _{nom}
Nominal external pressure, static	243	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	43.3	%	η _{es,SUP}
Enclosure sound level, nominal point	78	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



DVA 225 E2P 31

139332

ruck

MAXIMAL DATA


Name	Value	Unit	Formula symbol
Max. power consumption (device)	154	W	P _{ed, max}
Max. operating current (device)	0.88	A	I _{ed, max}
Max. speed	2910	1/min	n _{max}
Max. stat. efficiency	37.3	%	η _{es}
Max. fan efficiency	37.9	%	η _e
Max. flowrate	930	m³/h	q _{v, max}
Max. stat pressure	630	Pa	p _{sf, max}
Max. medium temperature	60	°C	T _{m, max}
Max. environment temperature	60	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}
Min. voltage	80	V	U _{min}
Stall current	1.74	A	I _{LRA}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)	50			f
Motor type	AC 1~			phase
Control type	stepless-controlled			ctrltype
Installation type	ORM (Out)			install
Rotation direction	right			rotation
Isolation class	ISO F			ISOclass
Motor-protection	TMI			protectmotor
Protection class	IP33			IP _{motor}
Is pole-changeable	No			polexch
Type of power supply	AC 1~			pwr _{sup} motor
Capacity capacitor	5		μF	C _{cond}
Voltage capacitor	400		V	VU _{cond}
Number of poles (1)	2.000000			num poles _{w1}
Rated voltage	230		V	U _{rated, f1}
Rated current	0.7		A	I _{rated, f1}
Speed	2685		1/min	n _{f1}
Min. temperature	-30		°C	T _{motor, min}
UL-Certification motor	None			ULcert




CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

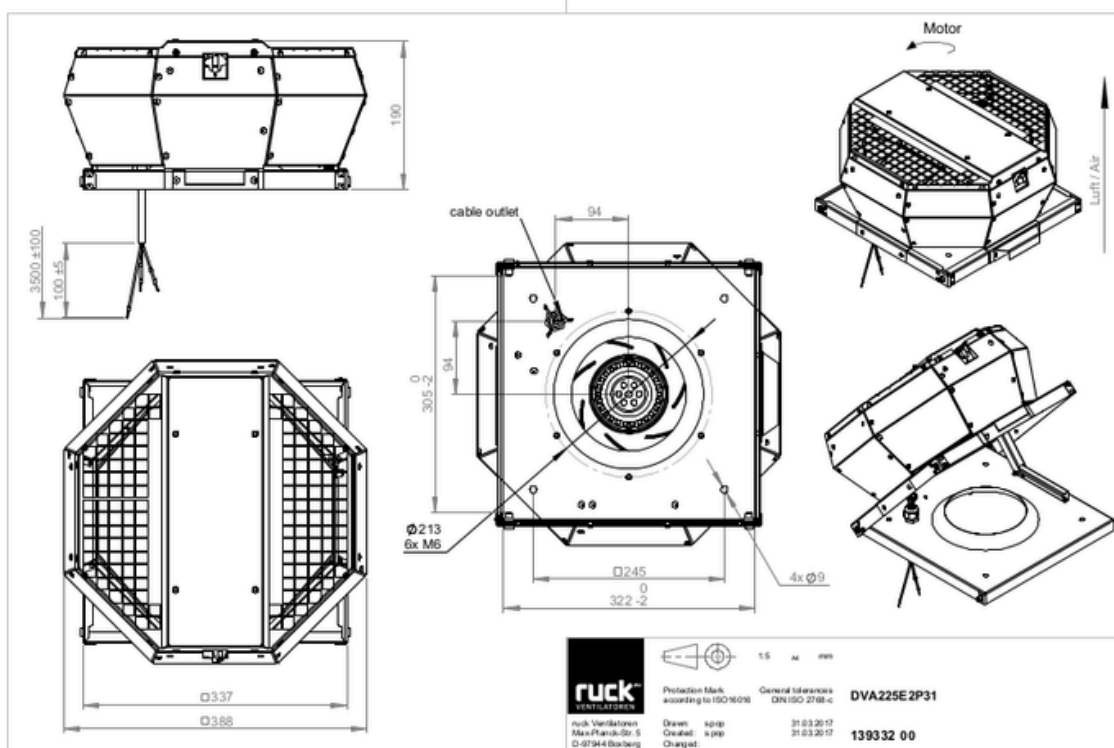

DVA 225 E2P 31

139332

ruck

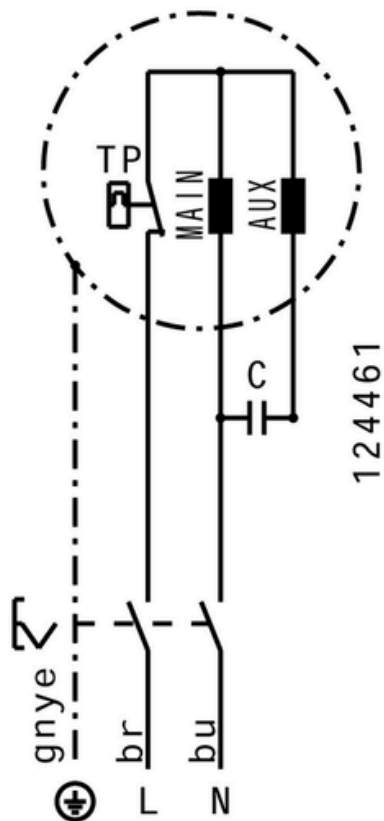


to the product detail page

DVA 225 E2P 31

139332

ruck

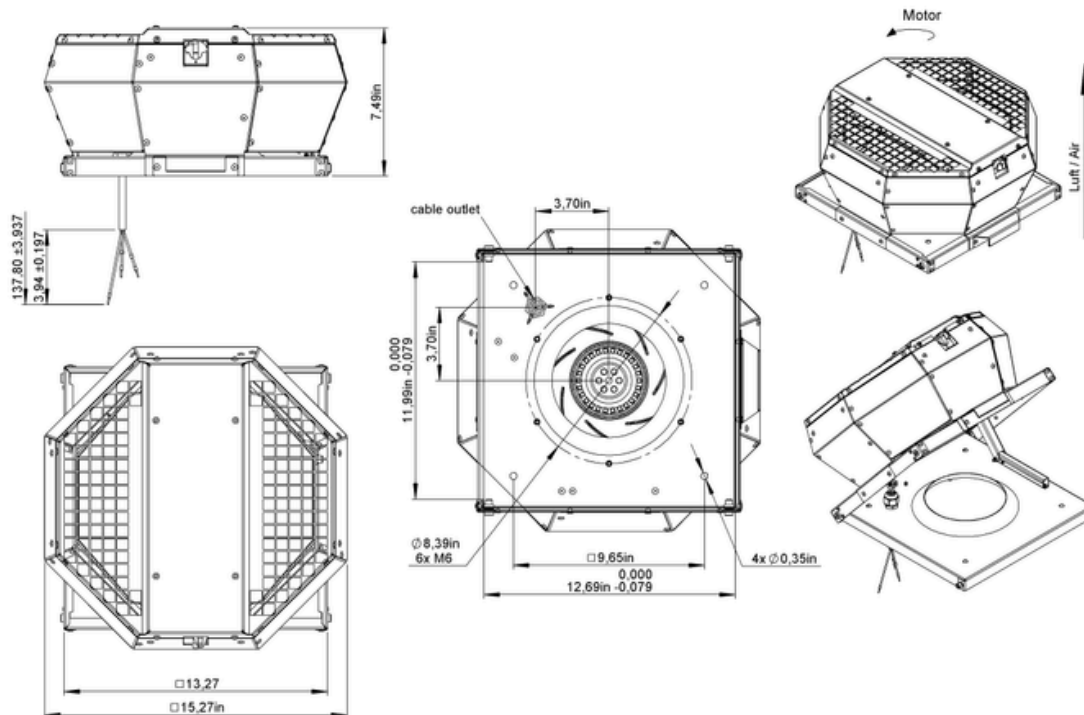

139332 00




to the product detail page

DVA 225 E2P 31

139332

ruck

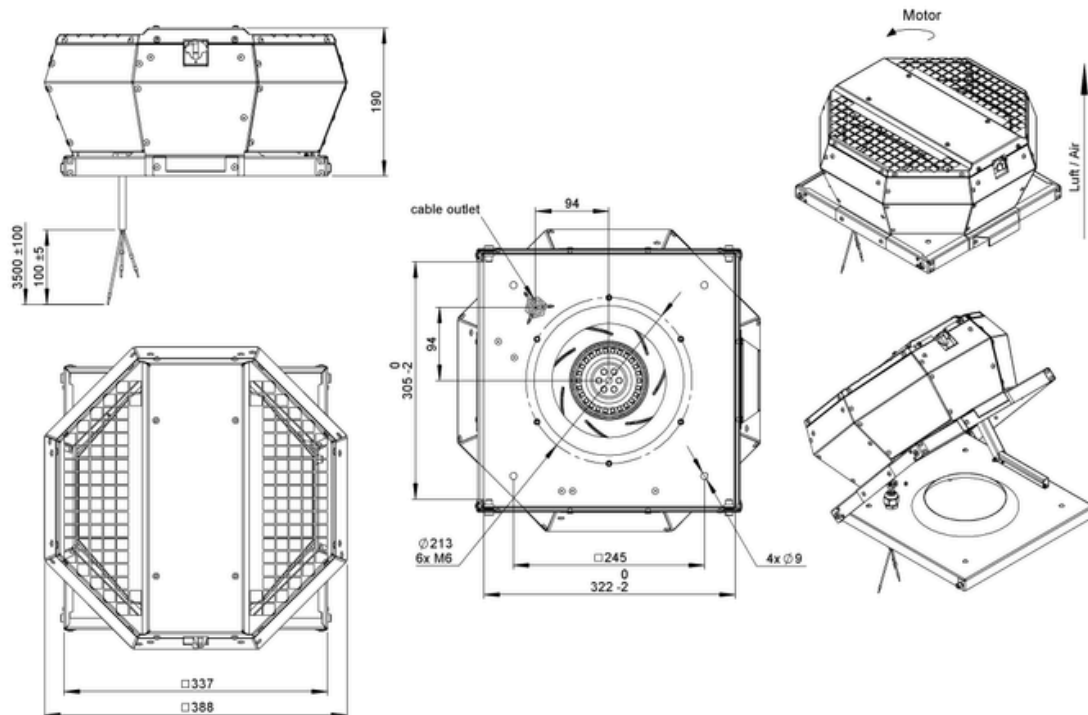

139332 00




to the product detail page

DVA 225 E2P 31

139332

ruck

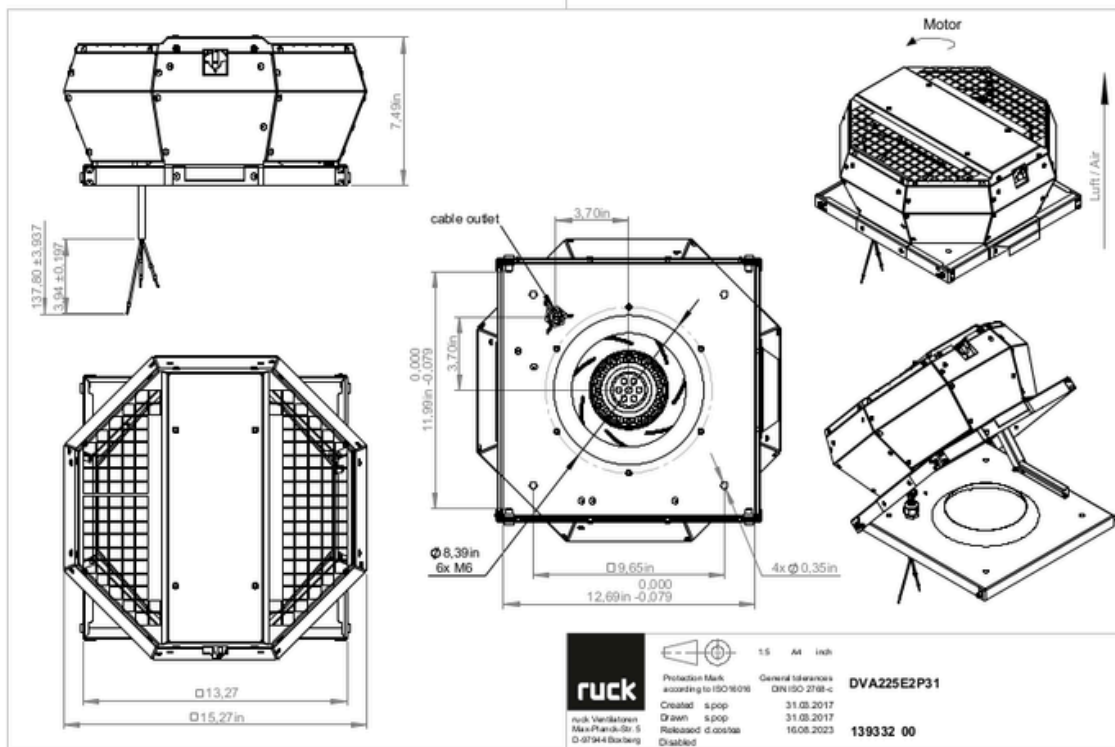

DVA 225 E2P 31

139332

MECHANICAL ACCESSORIES

DVK 180 10 | 153000



- Automatic roof shutter
- Galvanized steel sheet

DAF 150 | 110735




- Roof inlet flange
- Galvanized steel sheet

DAF 180 | 110744



- Roof inlet flange
- Galvanized steel sheet

DAS 180 | 110745



- Flexible roof inlet spigot
- Temperature resistant up to 75 °C

DAF 160 | 137396



- Roof inlet flange
- Galvanized steel sheet

DSF 220-10 | 126170



- Flat roof socket
- Made of aluminum AlMg3
- Sound and heat insulation

DSF 220-12 | 133709



- Sloped roof socket
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

DAP 220 | 133946



- Adapter plate for roof mounting of roof fans
- Galvanized steel sheet

DSS 220-10 | 126356



- Flat roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation

DSS 220-12 | 134283



- Sloped roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

ELECTRICAL ACCESSORIES

TES 0145 | 111858



- Step transformer
- 230 V ~, 50/60 Hz

TEE 015 | 115893



- 5-step transformer
- 230 V ~, 50/60 Hz



to the product detail page