


DVA 355 E4P 31


139320

- Backward curved radial impeller
- Vertical discharge
- Housing made of aluminum AlMg3
- Robust single phase AC motor, steplessly controllable
- Conveyed medium temperature up to 45 °C in continuous operation
- Integrated device switch

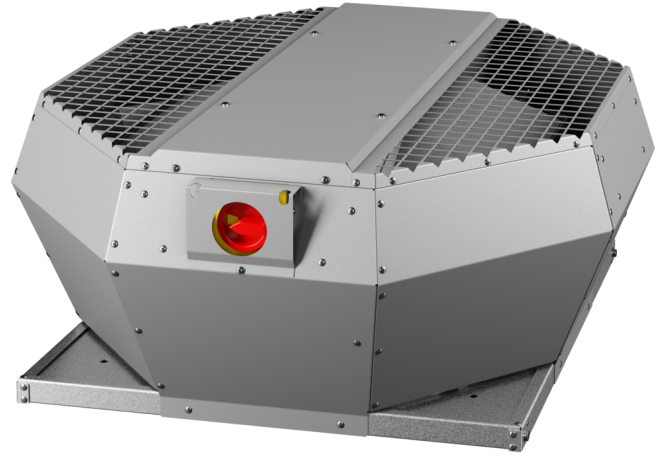

MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

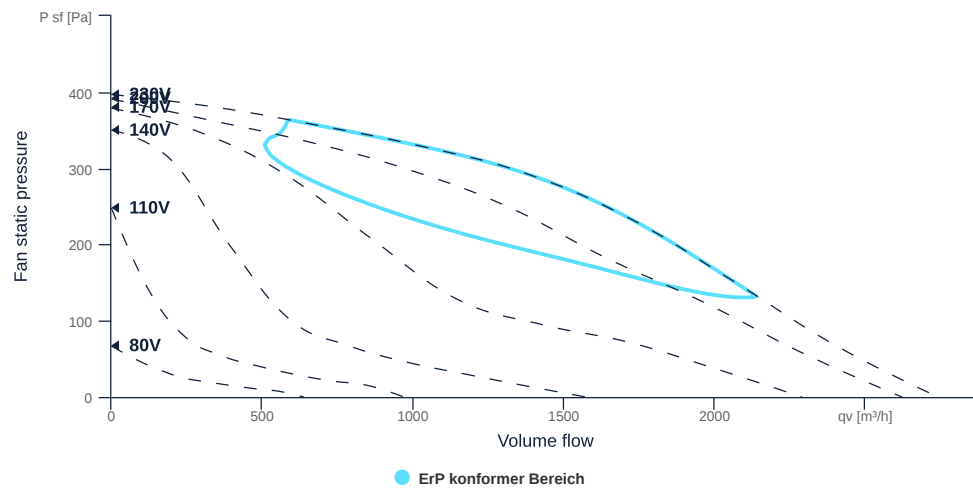

to the product detail page

DVA 355 E4P 31

139320

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN400		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (casing)	IP44		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	16.5	kg	m
Nominal air flow rate, nominal point m³/h	2095.2	m³/h	q _{v,nom}
Nominal external pressure, static	144	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.58	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.24	kW	P _{e,nom}
Face velocity, nominal point	3.59	m/s	v _{nom}
Nominal external pressure, static	144	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	45.7	%	η _{es,SUP}
Enclosure sound level, nominal point	75	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



DVA 355 E4P 31

139320

ruck

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	249	W	P _{ed, max}
Max. operating current (device)	1.34	A	I _{ed, max}
Max. speed	1460	1/min	n _{max}
Max. stat. efficiency	44.7	%	η _{es}
Max. fan efficiency	45.2	%	η _e
Max. flowrate	2740	m³/h	q _{v, max}
Max. stat pressure	400	Pa	p _{sf, max}
Max. medium temperature	45	°C	T _{m, max}
Max. environment temperature	45	°C	T _{amb, max}
Min. environment temperature	-25	°C	T _{amb, min}
Min. voltage	80	V	U _{min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 1~		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TAI		protectmotor
Protection class		IP44		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Capacity capacitor		6	μF	C _{cond}
Voltage capacitor		400	V	V _{Ucond}
Number of poles (1)		4.000000		num poles _{w1}
Rated voltage	230		V	U _{rated, f1}
Rated current	1.18		A	I _{rated, f1}
Speed	1330		1/min	n _{f1}
Starting current	2.2		A	I _{start, f1}
Min. temperature	-25		°C	T _{motor, min}
UL-Certification motor		None		ULcert




to the product detail page

DVA 355 E4P 31

139320

ruck

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

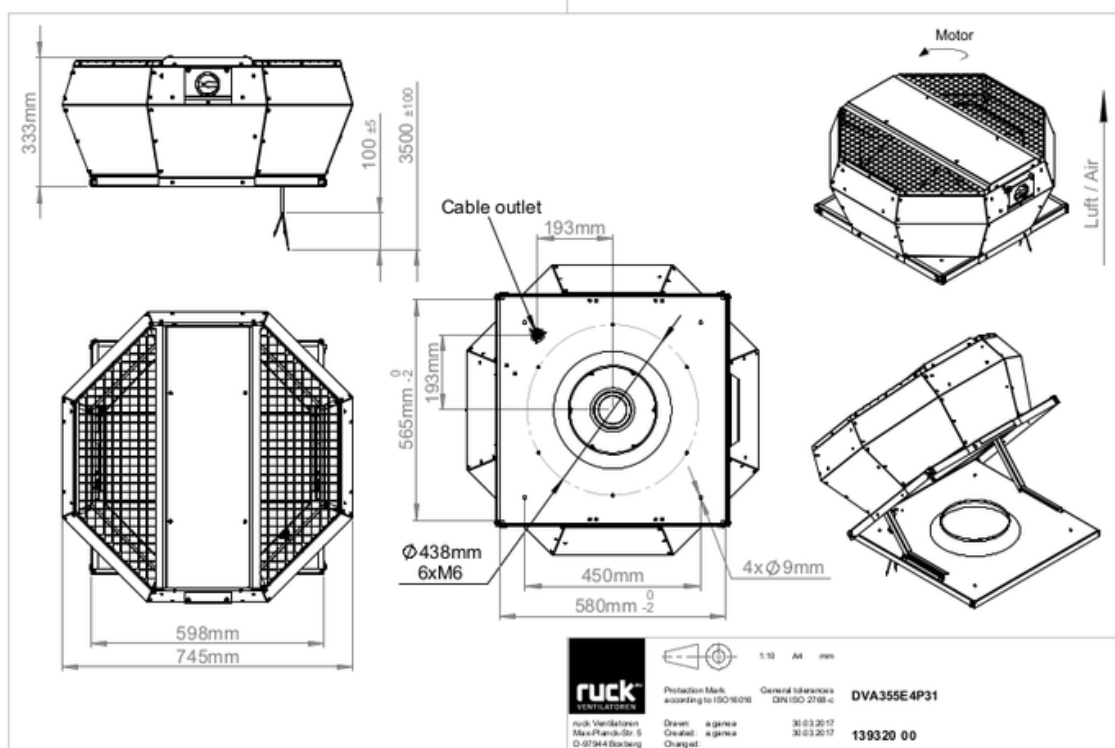


to the product detail page

DVA 355 E4P 31

139320

ruck

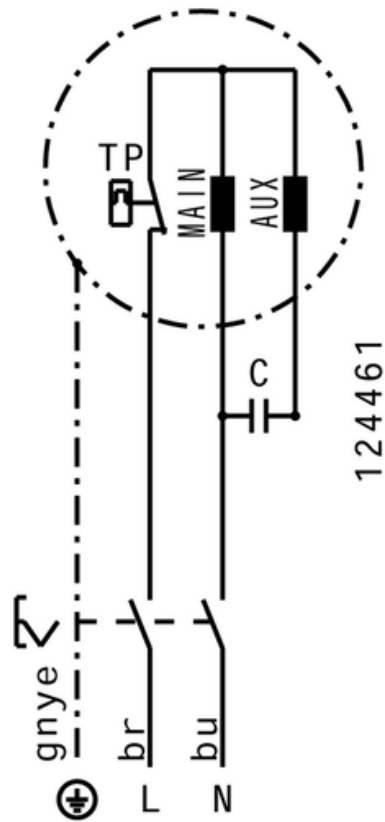


to the product detail page

DVA 355 E4P 31

139320

ruck

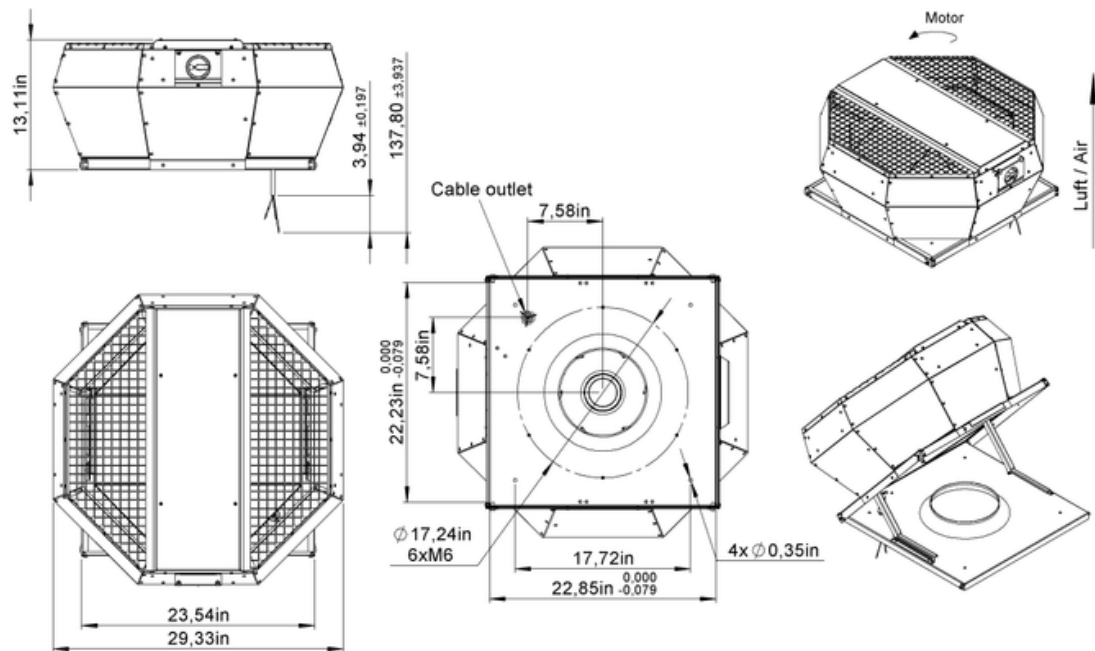

139320 00




to the product detail page

DVA 355 E4P 31

139320


ruck

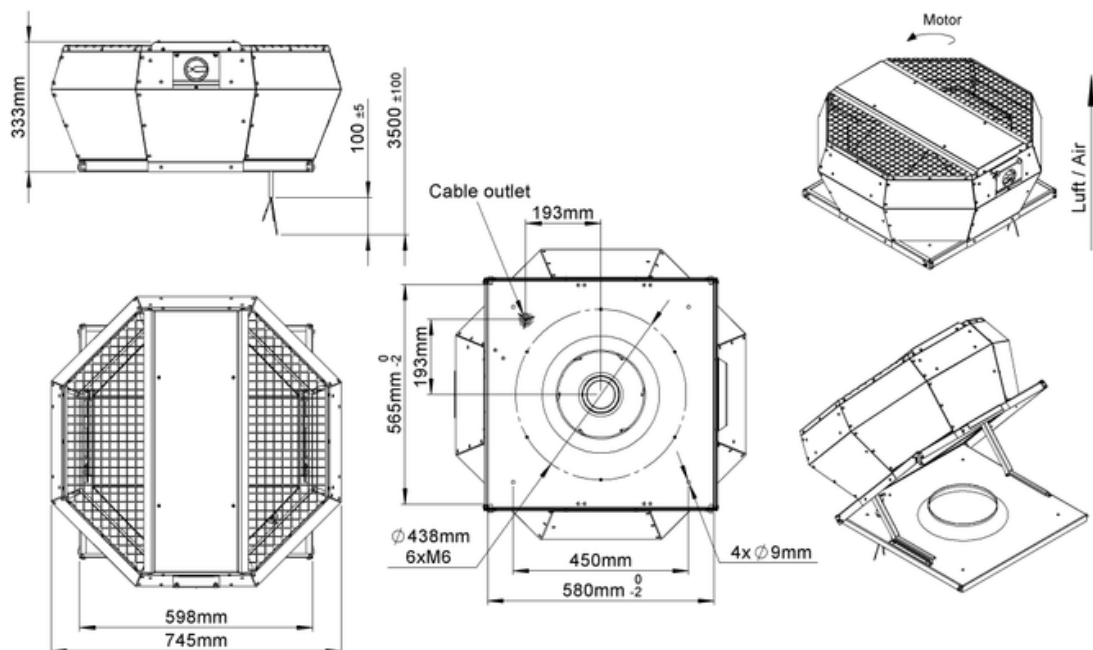

139320 00



to the product detail page

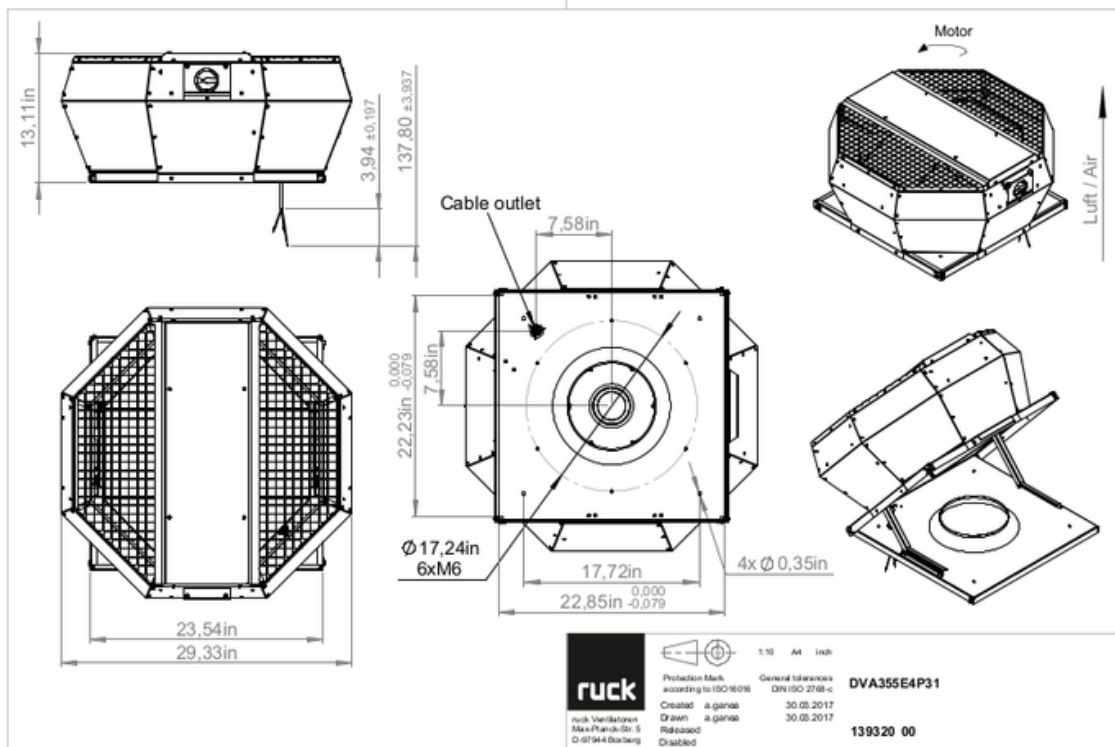

MECHANICAL ACCESSORIES

DVK 400 10 | 152897




- Automatic roof shutter
- Galvanized steel sheet

DAF 400 | 109826



- Roof inlet flange
- Galvanized steel sheet

DAS 400 | 109827




- Flexible roof inlet spigot
- Temperature resistant up to 75 °C

DSF 355-10 | 126160



- Flat roof socket
- Made of aluminum AlMg3
- Sound and heat insulation

DAP 355 | 133963



- Adapter plate for roof mounting of roof fans
- Galvanized steel sheet

DSS 355-10 | 126403



- Flat roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation

DSS 355-12 | 134395



- Sloped roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

DSF 355-12 | 133793



- Sloped roof socket
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°



to the product detail page

DVA 355 E4P 31

139320

ELECTRICAL ACCESSORIES

TEM 035 | 103502



- 5-step transformer
- 230 V, 50/60 Hz, 3.5 A
- Output voltage: 230-190-170-140-110-80-0 V
- Protection class IP 54

TES 035 02 | 146195



- 5-step transformer
- 230 V, 50/60 Hz, 3.5 A
- Without housing, control cabinet installation
- Protection class IP 20



to the product detail page