


MPC 315 D2 F4 T40


162874

- Backward curved radial impeller
- Variable discharge direction right / left / up
- Galvanized sheet steel housing, double-walled, 25 mm mineral wool
- IE3 motor outside airflow, frequency controllable
- Smoke extract fan F400, 200 °C continuous operation, dual-use
- Housing bottom designed with integrated drain

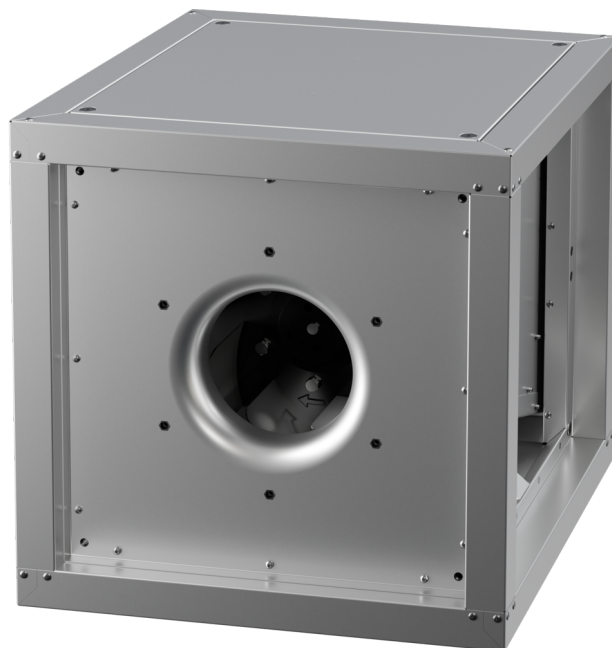

MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

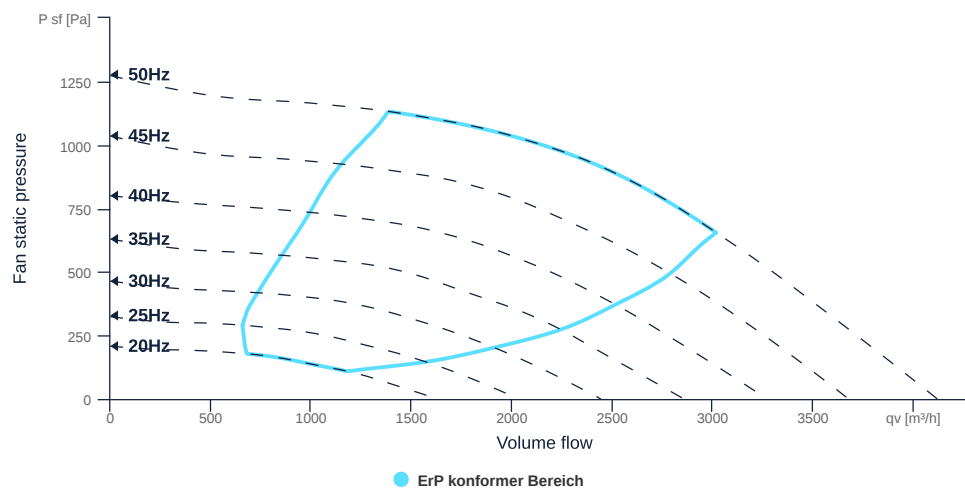

to the product detail page

MPC 315 D2 F4 T40

162874

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN355		DN
Rated voltage (entire device)	400	V	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Steel		mat _{impeller}
Weight	41	kg	m
Nominal air flow rate, nominal point m³/h	3016.8	m³/h	q _{v,nom}
Nominal external pressure, static	655	Pa	p _{s,nom}
Fan type	Radial		F _{antype}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.84	m³/s	q _{v,nom}
Actual electrical input power, nominal point	1.26	kW	P _{e,nom}
Face velocity, nominal point	6.21	m/s	v _{nom}
Nominal external pressure, static	655	Pa	p _{s,nom}
static efficiency of the extract fan, nominal point	43.46	%	η _{es,EHA}
Highest external air leakage rate	0.09	%	
Enclosure sound level, nominal point	76.22	dB(A)	L _{WA2}
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	1208	W	P _{ed, max}
Max. operating current (device)	2.45	A	I _{ed, max}
Max. speed	2950	1/min	n _{max}
Max. stat. efficiency	48.6	%	η _{es}
Max. fan efficiency	49.5	%	η _e
Max. flowrate	4115	m³/h	q _{v, max}
Max. stat pressure	1270	Pa	p _{sf, max}
Max. medium temperature	200	°C	T _{m, max}
Max. environment temperature	60	°C	T _{amb, max}
Min. environment temperature	-20	°C	T _{amb, min}



to the product detail page

MPC 315 D2 F4 T40

162874

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Number of poles (1)		2.000000		num polesw1
Connection	Δ	Y		wiringw1
Connection (wiring 2)	Y			wiringw2
Rated voltage	230	460	V	U _{rated, f1}
Rated voltage (wiring 2)	400		V	U _{rated, f2}
Rated current	4.03	2.05	A	I _{rated, f1}
Rated current (wiring 2)	2.32		A	I _{rated, f2}
Shaft power	1100	1100	W	P _{out, f1}
Shaft power (wiring 2)	1100		W	P _{out, f2}
Speed	2830	3450	1/min	n _{f1}
Speed (wiring 2)	2830		1/min	n _{f2}
Starting current	29.9	16.4	A	I _{start, f1}
Starting current (wiring 2)	17.2		A	I _{start, f2}
Efficiency	83.5	84	%	η _{m, f1}
Efficiency (wiring 2)	83.5		%	η _{m, f2}
Efficiency class	IE3			IE _{motor}
Min. temperature	-20		°C	T _{motor, min}
Cos Phi	0.820000	0.800000		cos φ
UL-Certification motor		UL recognized		ULcert


SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Maximum resistance temperature	400	°C	T _{fire}
Maximum resistance time	120.000000		t _{fire}
Fire resistance class	F 400 (120)		F _{class}
Snow load class	-		SL _{class}



to the product detail page


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

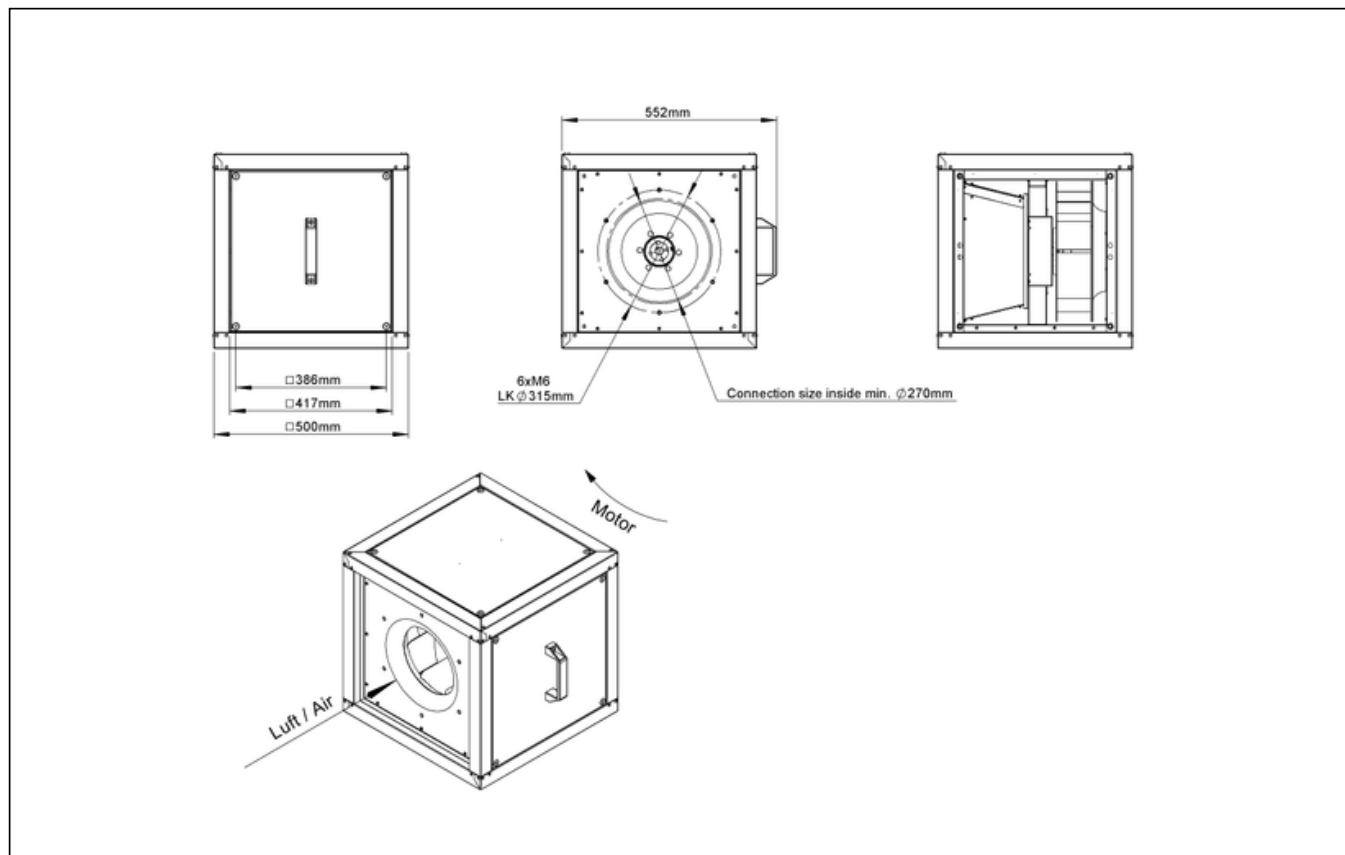

MPC 315 D2 F4 T40

162874

ruck

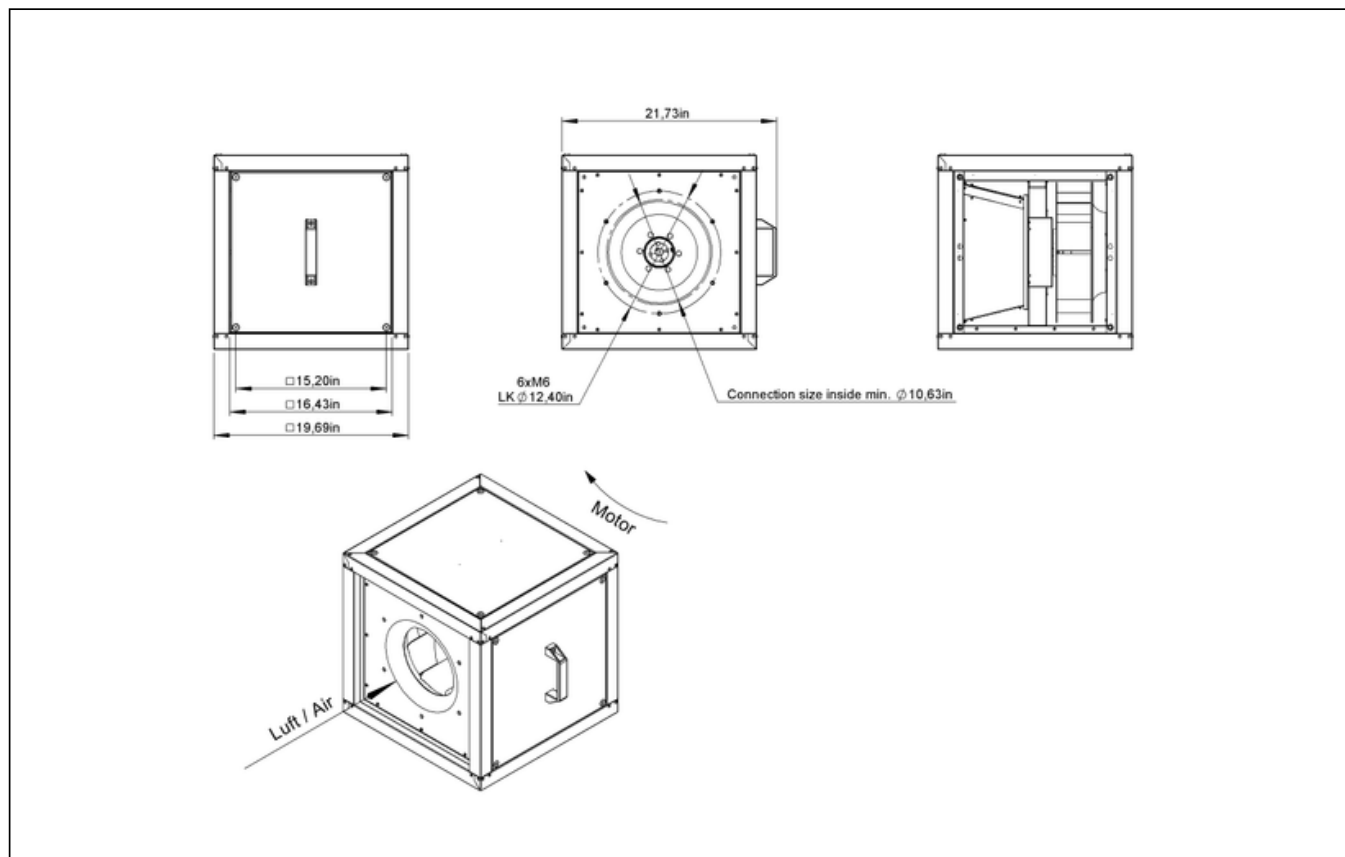


to the product detail page

MPC 315 D2 F4 T40

162874

ruck

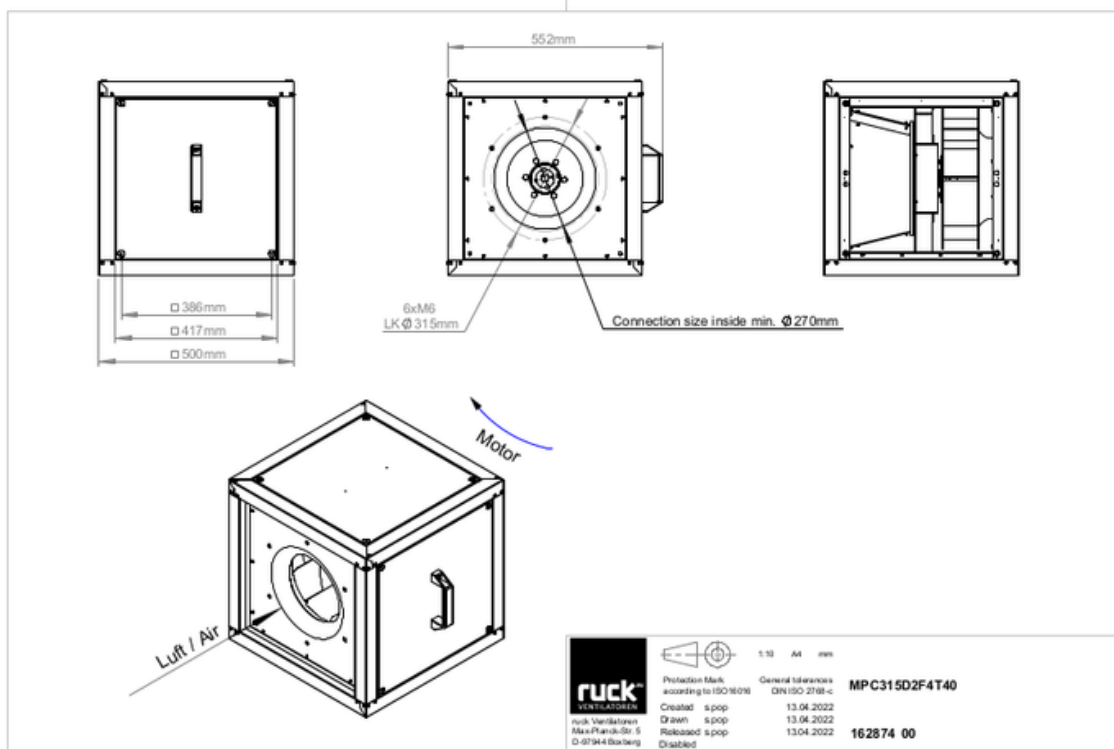


to the product detail page

MPC 315 D2 F4 T40

162874


ruck

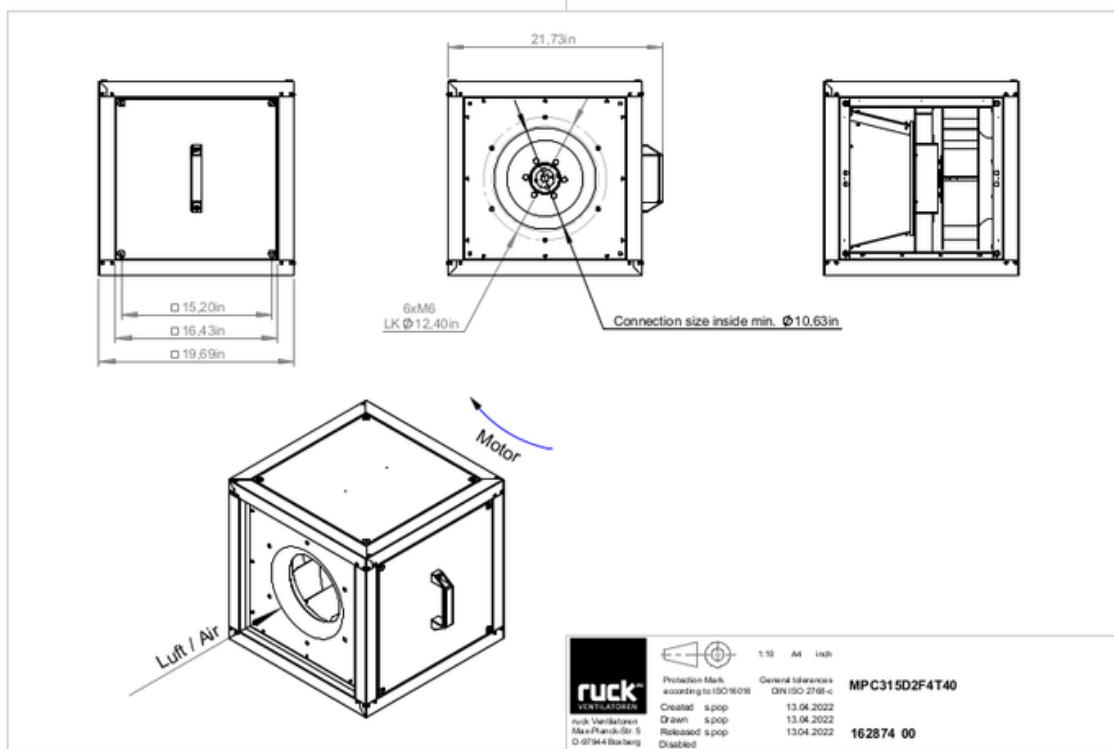

MPC 315 D2 F4 T40

162874

ruck

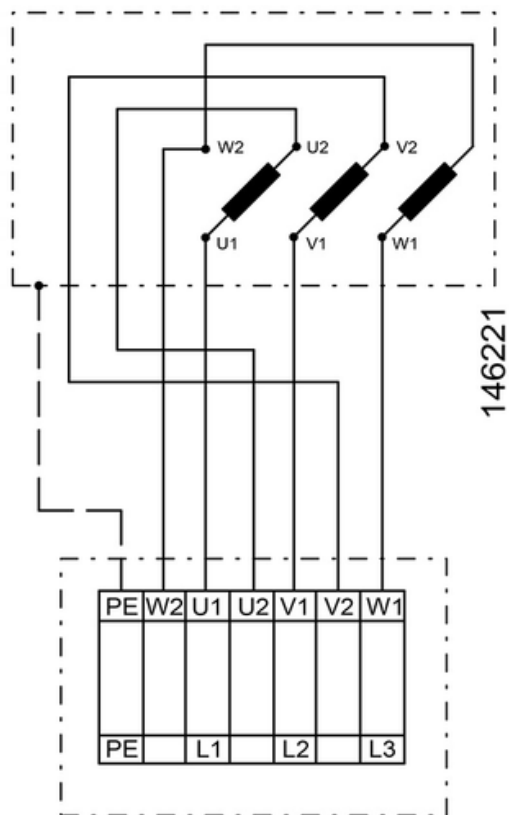

to the product detail page

MPC 315 D2 F4 T40

162874

MECHANICAL ACCESSORIES

USM 500 315 | 107181



- Transition spigot
- Galvanized steel sheet
- Insulated

USM 500 355 | 107182



- Transition spigot
- Galvanized steel sheet
- Insulated

GR MPC 01 | 123430



- Base frame für MPC
- Galvanized steel sheet

WSH MPC 01 | 123431



- Weather protection hood
- Galvanized steel sheet

UQR 500 315 01 | 136201




- Transition duct/tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

UQR 500 250 01 | 136232




- Transition duct/tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

RD MPC 500 | 140073



- Rain cover for outdoor installation
- Galvanized steel sheet

WSG MPC 500 | 140741



- Weather protection grille
- Galvanized steel sheet

AS MPC 315 | 140844




- Inlet spigot
- Galvanized steel sheet

AS MPC 355 | 140956



- Inlet spigot
- Galvanized steel sheet

UCP 500 | 142567



- Closed panel
- Galvanized steel sheet

RAF 280 | 154015



- Round flange
- Sheet steel, powder coated

RAS 280 F4 | 154298



- Round spigot, flexible
- Galvanized steel sheet, silicone band
- 400 °C/120 min. conf. DIN EN 12101-3 F400, 75 °C continuous operation
- Flange mounting

RVK 280 F4 | 154386



- Automatic tube shutter
- Sheet steel, powder coated
- For vertical installation
- Flange mounting

RVK H 280 F4 | 155666



- Automatic tube shutter
- Sheet steel, powder coated
- For horizontal installation
- Flange mounting



to the product detail page

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400\text{ V}$, $I_{max} = 25\text{ A}$
- Switching capacity $400\text{ V } 3\sim = 5,5\text{ kW}$
- Protection class IP 55

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output $0\text{--}10\text{ V DC} + \text{FC enable} + \text{setpoint reached}$
- Pressure setting by means of decade switch

MTP 20 | 128146



- Potentiometer $10\text{ k}\Omega$
- Switching contact $1\text{ A}/250\text{ V AC} - 2,5\text{ A}/12\text{ V DC}$
- Max. ambient temperature $50\text{ }^{\circ}\text{C}$
- VDE

MS 02 | 140409



- Motor protection switch with Isolator switchfunction
- $I_{max} = 400\text{ V}$, $50/60\text{ Hz}$
- Max. $1,5\text{ kW}$
- Protection class IP 55

FU 15 11 | 141850



- Frequency converter IP66
- Supply voltage $230\text{ V } 1\sim 50/60\text{ Hz}$
- Output voltage $0 - 230\text{ V } 3\sim$
- Fire mode function (smoke extract fans)

FU 15 17 | 141872



- Frequency converter
- Supply voltage $400\text{ V } 3\sim 50/60\text{ Hz}$
- Output voltage $0 - 400\text{ V } 3\sim$
- Fire mode function (smoke extract fans)

MTP 30 | 143289



- Stepped potentiometer $10\text{ k}\Omega$
- Step 1 + 2 settable $10\% - 100\% \text{ Vdc}$
- Step 3 $100\% \text{ Vdc}$
- Supply voltage $+10\text{ Vdc}$

MTP 40 | 147359



- Potentiometer $10\text{ k}\Omega$
- Connection in terminal box
- Max. ambient temperature $50\text{ }^{\circ}\text{C}$
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature $0\text{...}+50\text{ }^{\circ}\text{C}$
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

MTP 50 | 153133



- Potentiometer with multifunction output
- $230\text{ VAC } \pm 10\% / 50\text{--}60\text{ Hz}$
- Selectable output: $1\text{--}10\text{ VDC} / 2\text{--}20\text{ mA}$ / $10\text{--}100\% \text{ PWM}$
- Min. and max. output value adjustable



to the product detail page