


MPC 355 D4 F4 T40


162906

- Backward curved radial impeller
- Variable discharge direction right / left / up
- Galvanized sheet steel housing, double-walled, 25 mm mineral wool
- IE3 motor outside airflow, frequency controllable
- Smoke extract fan F400, 200 °C continuous operation, dual-use
- Housing bottom designed with integrated drain

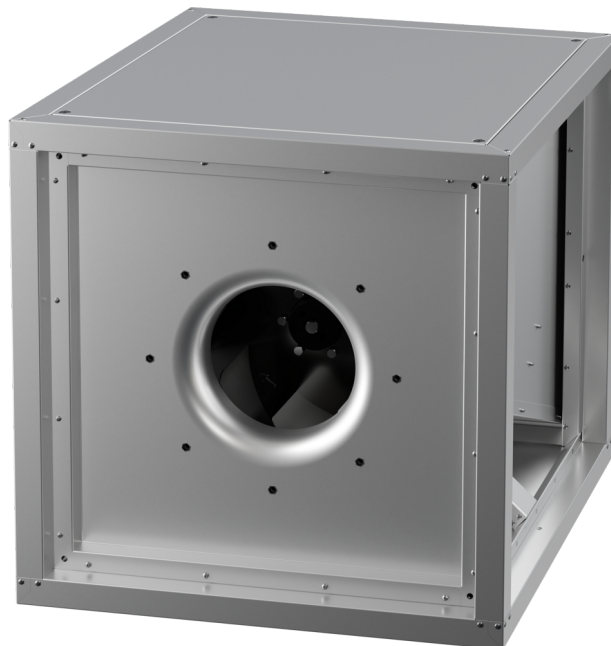

MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

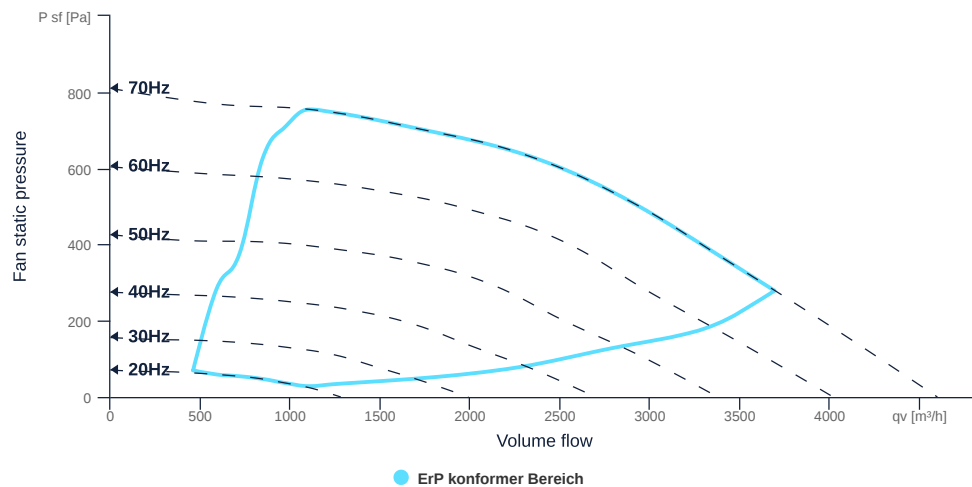

to the product detail page

MPC 355 D4 F4 T40

162906

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	-		DN
Rated voltage (entire device)	400	V	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Steel		mat _{impeller}
Weight	63	kg	m
Nominal air flow rate, nominal point m³/h	3682.8	m³/h	q _{v,nom}
Nominal external pressure, static	277	Pa	p _{s,nom}
Fan type	Radial		F _{antype}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	1.02	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.69	kW	P _{e,nom}
Face velocity, nominal point	3.18	m/s	v _{nom}
Nominal external pressure, static	277	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	56.9	%	η _{es,SUP}
Highest external air leakage rate	0.08	%	
Enclosure sound level, nominal point	80	dB(A)	L _{WA2}
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	338	W	P _{ed, max}
Max. operating current (device)	1.37	A	I _{ed, max}
Max. speed	2060	1/min	n _{max}
Max. stat. efficiency	52.9	%	η _{es}
Max. fan efficiency	53.2	%	η _e
Max. flowrate	4590	m³/h	q _{v, max}
Max. stat pressure	810	Pa	p _{sf, max}
Max. medium temperature	200	°C	T _{m, max}
Max. environment temperature	60	°C	T _{amb, max}
Min. environment temperature	-20	°C	T _{amb, min}



to the product detail page

MPC 355 D4 F4 T40

162906

ruck

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Number of poles (1)		4.000000		num polesw1
Connection	Δ	Y		wiringw1
Connection (wiring 2)	Y			wiringw2
Rated voltage	230	460	V	U _{rated, f1}
Rated voltage (wiring 2)	400		V	U _{rated, f2}
Rated current	2.14	1.09	A	I _{rated, f1}
Rated current (wiring 2)	1.23		A	I _{rated, f2}
Shaft power	550	550	W	P _{out, f1}
Shaft power (wiring 2)	550		W	P _{out, f2}
Speed	1420	1720	1/min	n _{f1}
Speed (wiring 2)	1420		1/min	n _{f2}
Starting current	14.1	7.96	A	I _{start, f1}
Starting current (wiring 2)	8.12		A	I _{start, f2}
Efficiency	80.8	81.5	%	η _{m, f1}
Efficiency (wiring 2)	80.8		%	η _{m, f2}
Efficiency class	IE3	IE3		IE _{motor}
Min. temperature	-20	-20	°C	T _{motor, min}
Cos Phi	0.800000	0.780000		cos φ
UL-Certification motor		UL recognized		ULcert

SMOKE EXTRACT DATA

Name	Value	Unit	Formula symbol
Maximum resistance temperature	400	°C	T _{fire}
Maximum resistance time	120.000000		t _{fire}
Fire resistance class	F 400 (120)		F _{class}
Snow load class	-		SL _{class}




to the product detail page

MPC 355 D4 F4 T40

162906

ruck

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

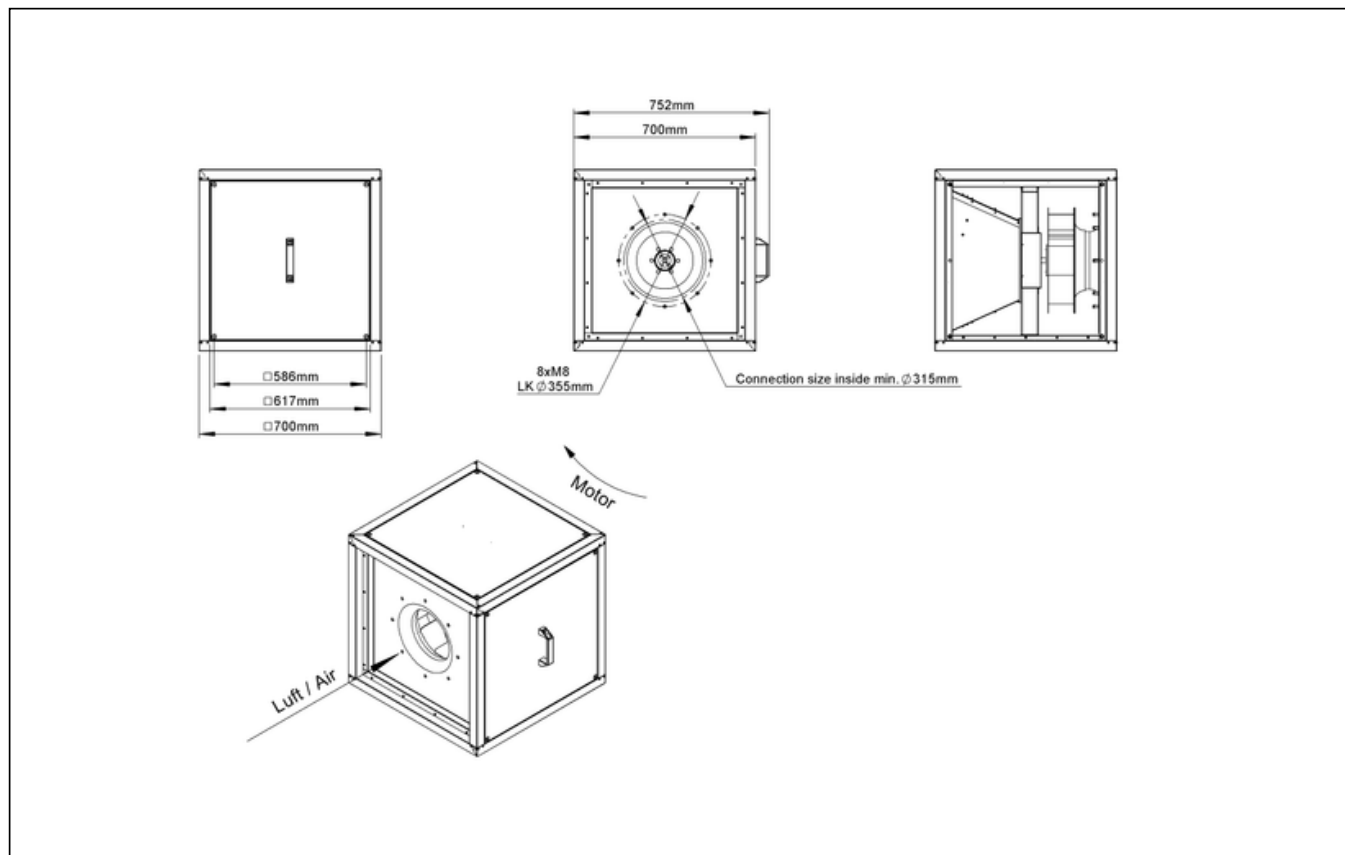


to the product detail page

MPC 355 D4 F4 T40

162906

ruck

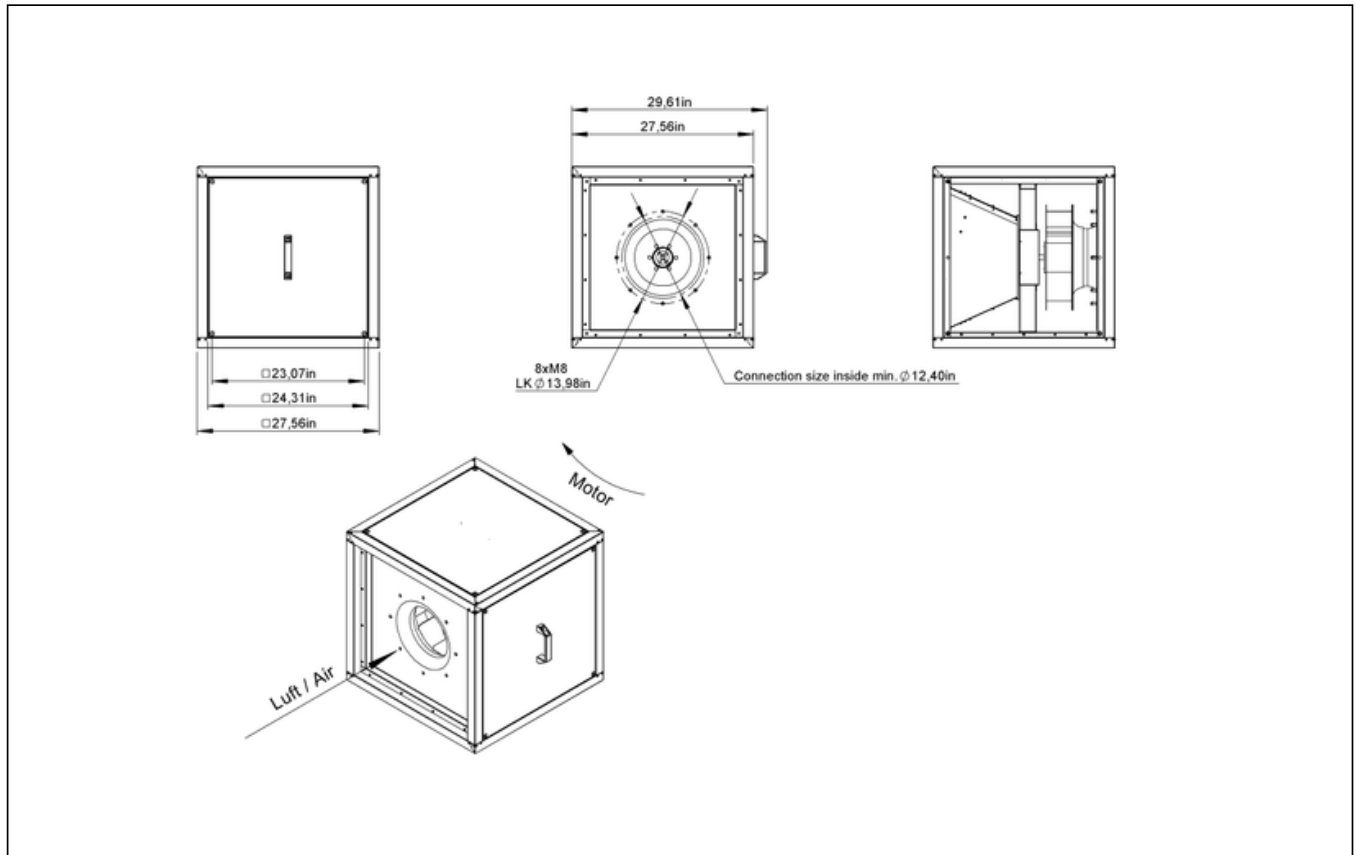


to the product detail page

MPC 355 D4 F4 T40

162906

ruck

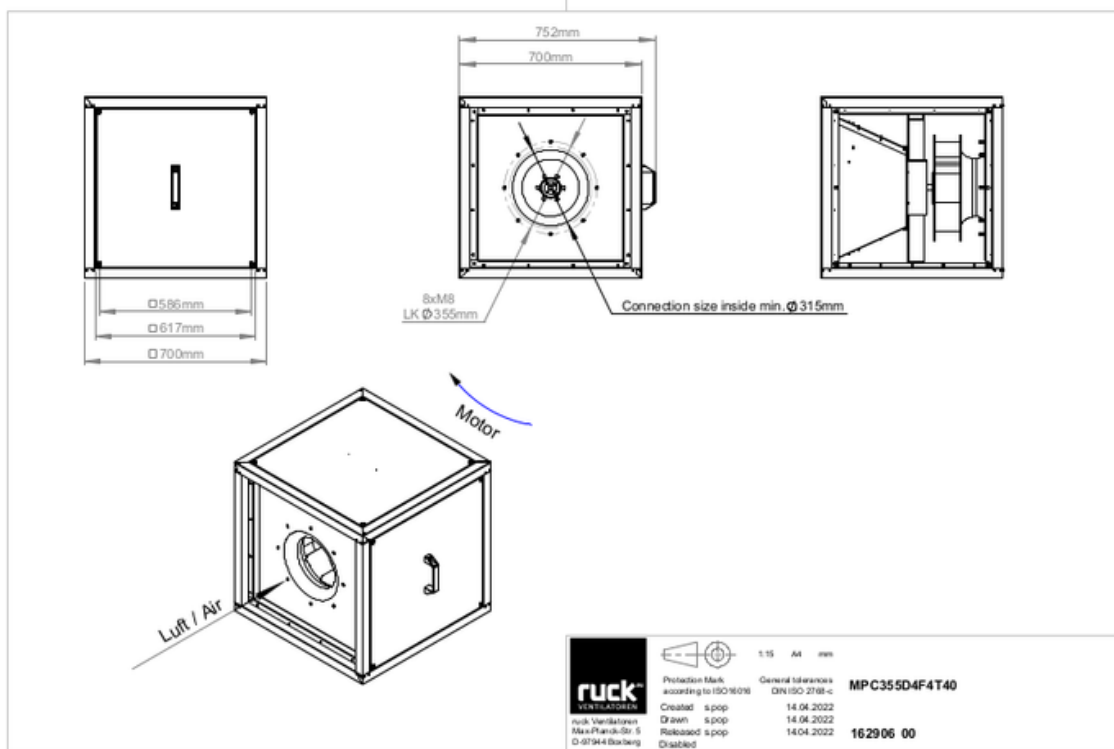


to the product detail page

MPC 355 D4 F4 T40

162906

ruck

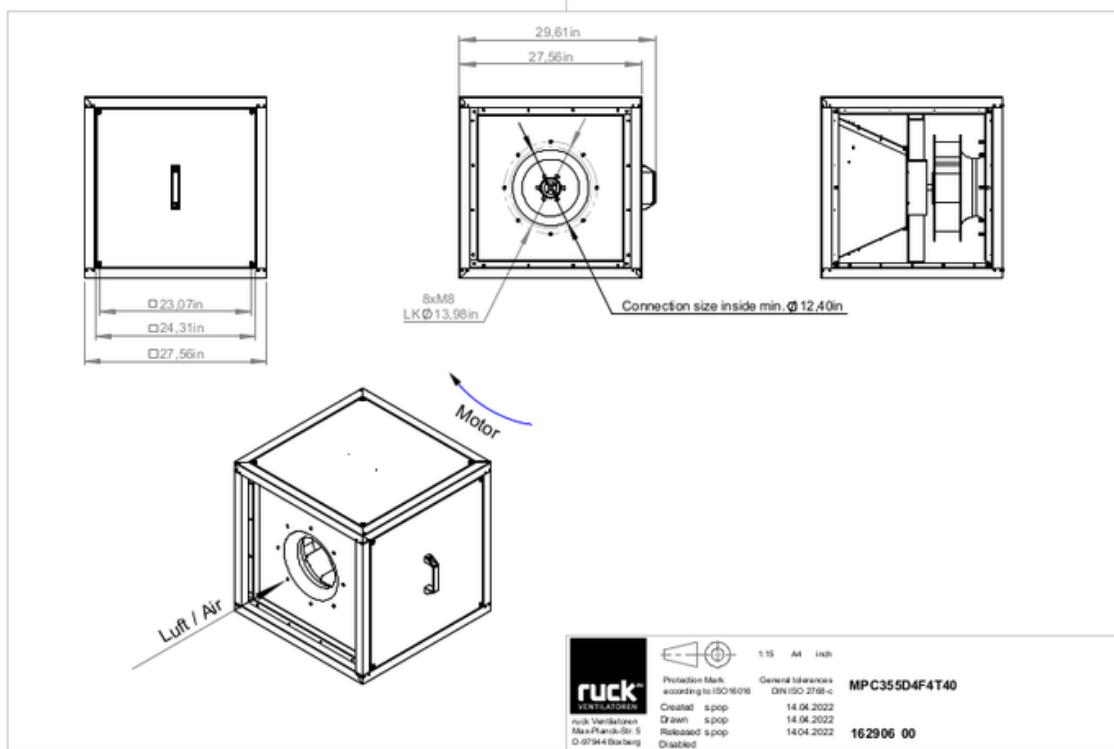


to the product detail page

MPC 355 D4 F4 T40

162906

ruck

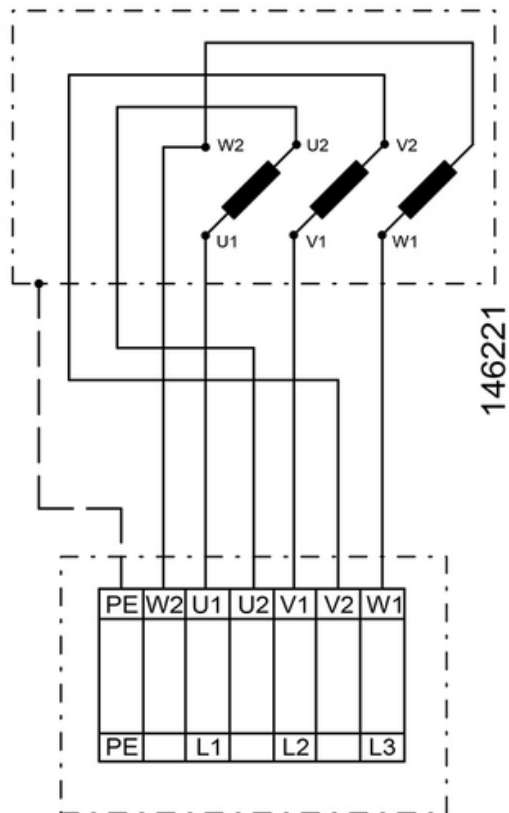

to the product detail page

MECHANICAL ACCESSORIES

USM 700 400 | 107214



- Transition spigot
- Galvanized steel sheet
- Insulated

USM 700 450 | 107240



- Transition spigot
- Galvanized steel sheet
- Insulated

USM 700 500 | 107241



- Transition spigot
- Galvanized steel sheet
- Insulated

GR MPC 02 | 123432



- Base frame für MPC
- Galvanized steel sheet

WSH MPC 02 | 123433



- Weather protection hood
- Galvanized steel sheet

UQR 700 400 01 | 139863



- Transition duct/tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

UQR 700 450 01 | 139868




- Transition duct/tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

UQR 700 500 01 | 139871



- Transition duct/tube
- Galvanized steel sheet
- Incl. 4 cylinder cap screws (M8 x 16 mm), 4 serrated lock washers for nominal size M8

RD MPC 700 | 140093



- Rain cover for outdoor installation
- Galvanized steel sheet

WSG MPC 700 | 140748



- Weather protection grille
- Galvanized steel sheet

AS MPC 400 | 140847



- Inlet spigot
- Galvanized steel sheet

AS MPC 450 | 140852




- Inlet spigot
- Galvanized steel sheet

AS MPC 500 | 140871



- Inlet spigot
- Galvanized steel sheet

UCP 700 | 142568




- Closed panel
- Galvanized steel sheet

RAF 315 | 154016




- Round flange
- Sheet steel, powder coated

SGW 315 | 154047



- Protection grille, wide meshed
- Steel sheet, galvanized
- Flange mounting

SGE 315 | 154058



- Protection grille, narrow meshed
- Steel sheet, galvanized

RVS 315 | 154174



- Tube connection spigot
- Sheet steel, powder coated

RAS 315 F4 | 154299



- Round spigot, flexible
- Galvanized steel sheet, silicone band

RVK 315 F4 | 154391



- Automatic tube shutter
- Sheet steel, powder coated



to the product detail page

MPC 355 D4 F4 T40

162906

- Flange mounting
- Suitable for outdoor installation
- 400 °C/120 min. conf. DIN EN 12101-3
- For vertical installation
- Flange mounting
- F400, 75 °C continuous operation
- Flange mounting

RVK H 315 F4 | 155674



- Automatic tube shutter
- Sheet steel, powder coated
- For horizontal installation
- Flange mounting



to the product detail page

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400\text{ V}$, $I_{max} = 25\text{ A}$
- Switching capacity $400\text{ V } 3\sim = 5,5\text{ kW}$
- Protection class IP 55

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output $0-10\text{ V DC} + \text{FC enable} + \text{setpoint reached}$
- Pressure setting by means of decade switch

MTP 20 | 128146



- Potentiometer $10\text{ k}\Omega$
- Switching contact $1\text{ A}/250\text{ V AC} - 2,5\text{ A}/12\text{ V DC}$
- Max. ambient temperature $50\text{ }^{\circ}\text{C}$
- VDE

MS 01 | 140407



- Motor protection switch with Isolator switchfunction
- $I_{max} = 400\text{ V}$, $50/60\text{ Hz}$
- Max. $0,55\text{ kW}$
- Protection class IP 55

FU 075 18 | 141852



- Frequency converter IP66
- Supply voltage $230\text{ V } 1\sim 50/60\text{ Hz}$
- Output voltage $0 - 230\text{ V } 3\sim$
- Fire mode function (smoke extract fans)

FU 075 30 | 141874



- Frequency converter
- Supply voltage $400\text{ V } 3\sim 50/60\text{ Hz}$
- Output voltage $0 - 400\text{ V } 3\sim$
- Fire mode function (smoke extract fans)

MTP 30 | 143289



- Stepped potentiometer $10\text{ k}\Omega$
- Step 1 + 2 settable $10\% - 100\% \text{ Vdc}$
- Step 3 $100\% \text{ Vdc}$
- Supply voltage $+10\text{ Vdc}$

MTP 40 | 147359



- Potentiometer $10\text{ k}\Omega$
- Connection in terminal box
- Max. ambient temperature $50\text{ }^{\circ}\text{C}$
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature $0...+50\text{ }^{\circ}\text{C}$
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

MTP 50 | 153133



- Potentiometer with multifunction output
- $230\text{ VAC } \pm 10\% / 50-60\text{ Hz}$
- Selectable output: $1-10\text{ VDC} / 2-20\text{ mA}$ / $10-100\% \text{ PWM}$
- Min. and max. output value adjustable

