

MPS 250 D2 40


156623

- Backward curved radial impeller
- Swing out fan unit
- Sheet steel housing double-walled, 40 mm mineral wool
- Efficient IE3 motor, outside the airflow
- Conveyed medium temperature up to 120 °C in continuous operation
- With condensate and grease drain



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

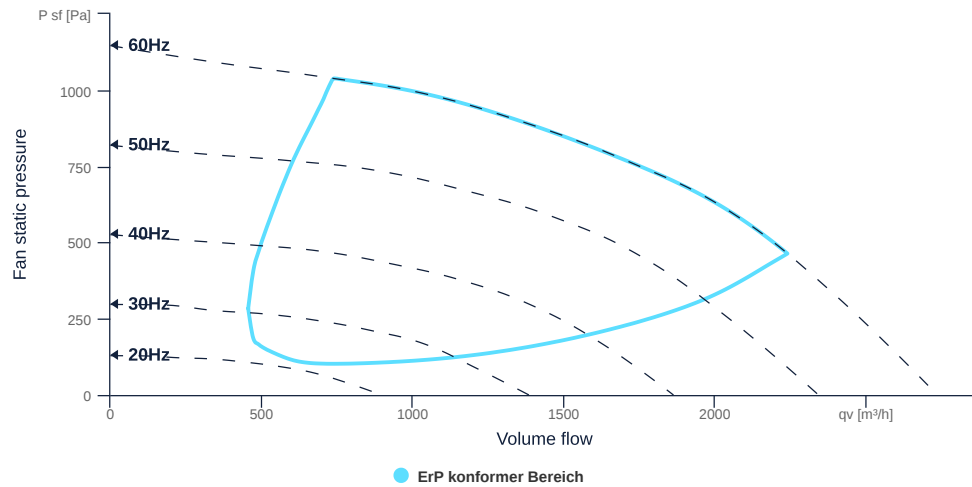

to the product detail page

MPS 250 D2 40

156623

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN250		DN
Rated voltage (entire device)	400	V	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Galvanized steel		mat _{casing}
Impeller material	Steel		mat _{impeller}
Weight	38	kg	m
Nominal air flow rate, nominal point m³/h	2239.2	m³/h	q _{v,nom}
Nominal external pressure, static	464	Pa	p _{s,nom}
Fan type	Radial		F _{antype}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.62	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.72	kW	P _{e,nom}
Face velocity, nominal point	12.68	m/s	v _{nom}
Nominal external pressure, static	464	Pa	p _{s,nom}
static efficiency of the extract fan, nominal point	40.01	%	η _{es,EHA}
Enclosure sound level, nominal point	72.92	dB(A)	L _{WA2}
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	756	W	P _{ed, max}
Max. operating current (device)	1.28	A	I _{ed, max}
Max. speed	3480	1/min	n _{max}
Max. stat. efficiency	46.4	%	η _{es}
Max. fan efficiency	50	%	η _e
Max. flowrate	2730	m³/h	q _{v, max}
Max. stat pressure	1130	Pa	p _{sf, max}
Max. medium temperature	120	°C	T _{m, max}
Max. environment temperature	60	°C	T _{amb, max}
Min. environment temperature	-20	°C	T _{amb, min}
Min. voltage	400	V	U _{min}



to the product detail page

MPS 250 D2 40

156623

ruck


MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Number of poles (1)		2.000000		num polesw1
Connection	Δ	Y		wiringw1
Connection (wiring 2)	Y			wiringw2
Rated voltage	230	460	V	U _{rated, f1}
Rated voltage (wiring 2)	400		V	U _{rated, f2}
Rated current	2.07	1.07	A	I _{rated, f1}
Rated current (wiring 2)	1.19		A	I _{rated, f2}
Shaft power	550	550	W	P _{out, f1}
Shaft power (wiring 2)	550		W	P _{out, f2}
Speed	2770	3415	1/min	n _{f1}
Speed (wiring 2)	2770		1/min	n _{f2}
Starting current	122	7.81	A	I _{start, f1}
Starting current (wiring 2)	70.2		A	I _{start, f2}
Efficiency	77.8	77	%	$\eta_m, f1$
Efficiency (wiring 2)	77.8		%	$\eta_m, f2$
Efficiency class	IE3	IE3		IE _{motor}
Min. temperature	-20	-20	°C	T _{motor, min}
Cos Phi	0.860000	0.840000		cos φ
UL-Certification motor		UL recognized		ULcert



to the product detail page


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

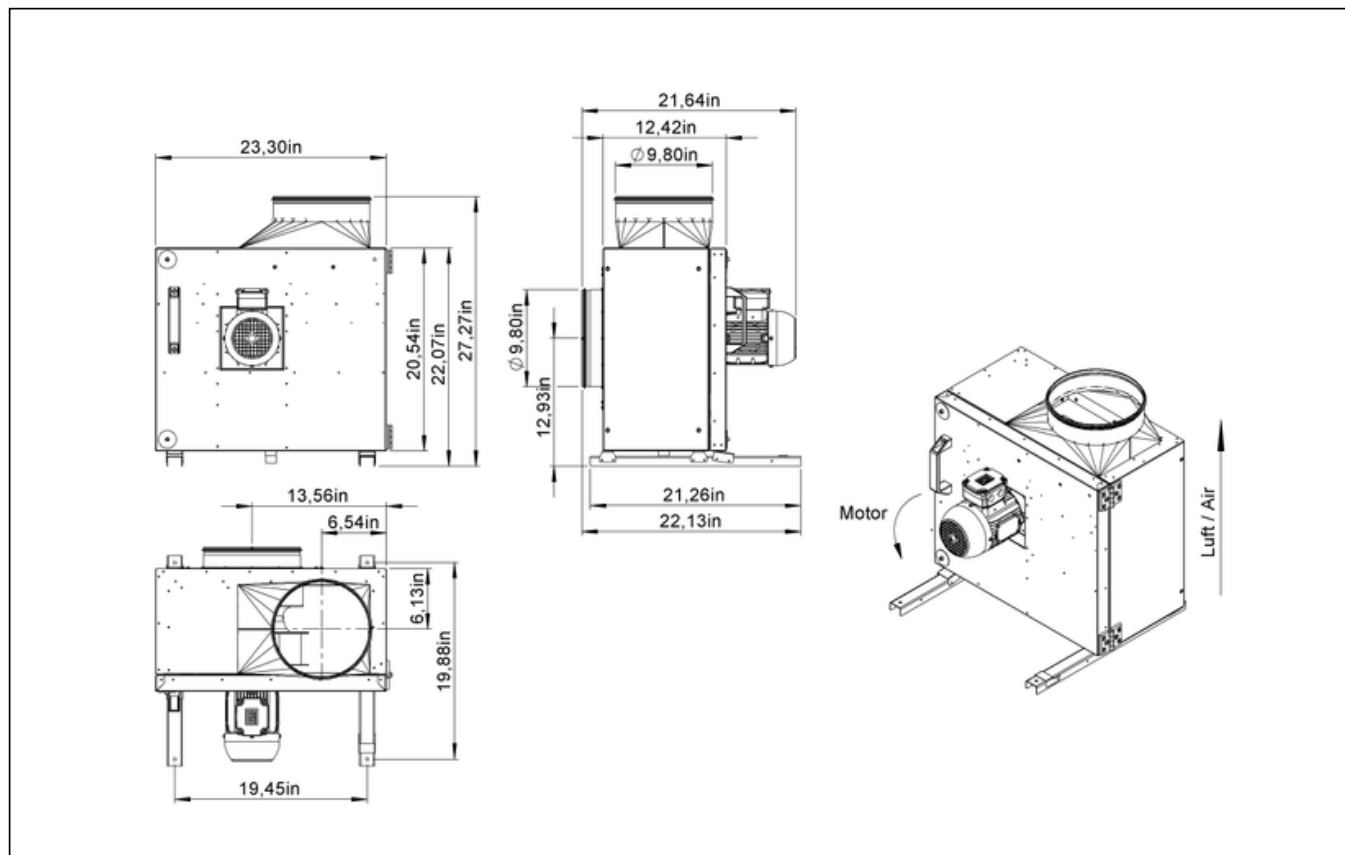

MPS 250 D2 40

156623


ruck

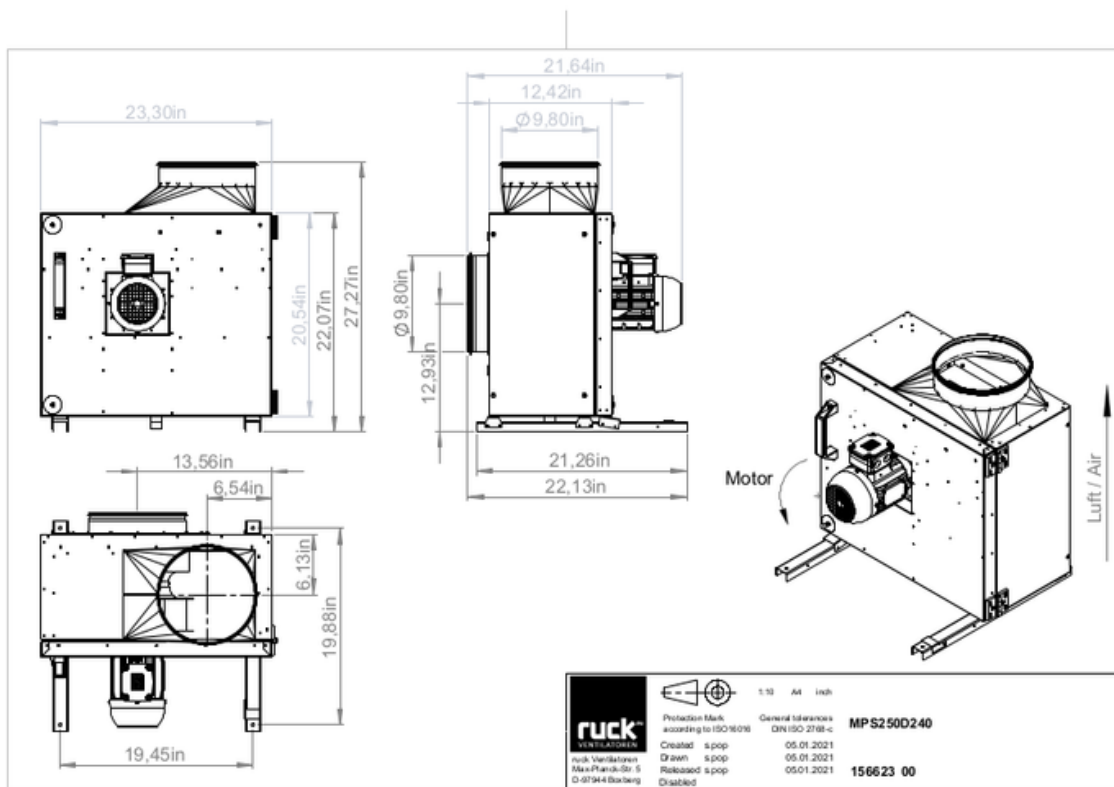

MPS 250 D2 40

156623

ruck

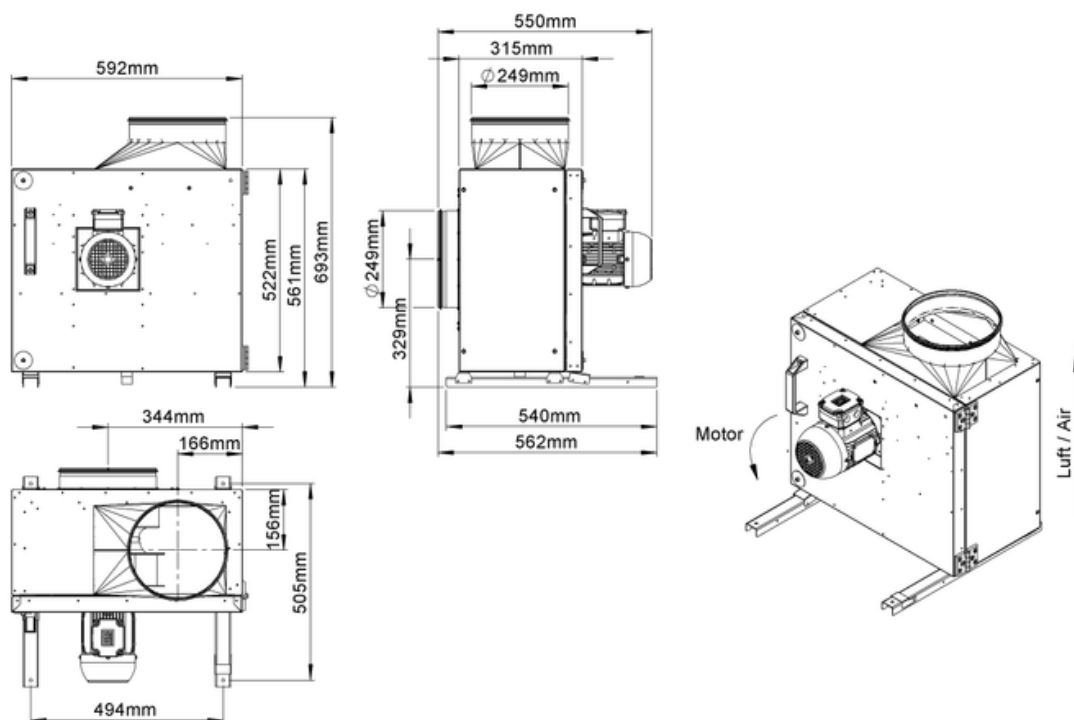


to the product detail page

MPS 250 D2 40


156623

ruck

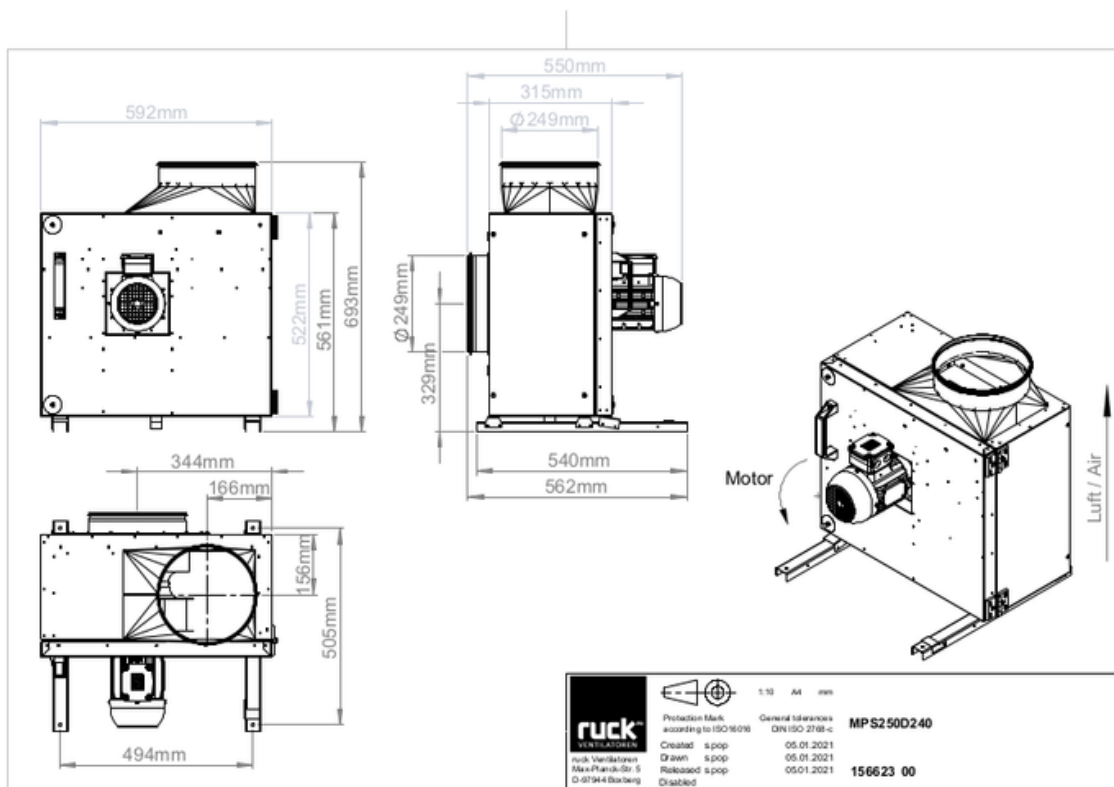

MPS 250 D2 40

156623

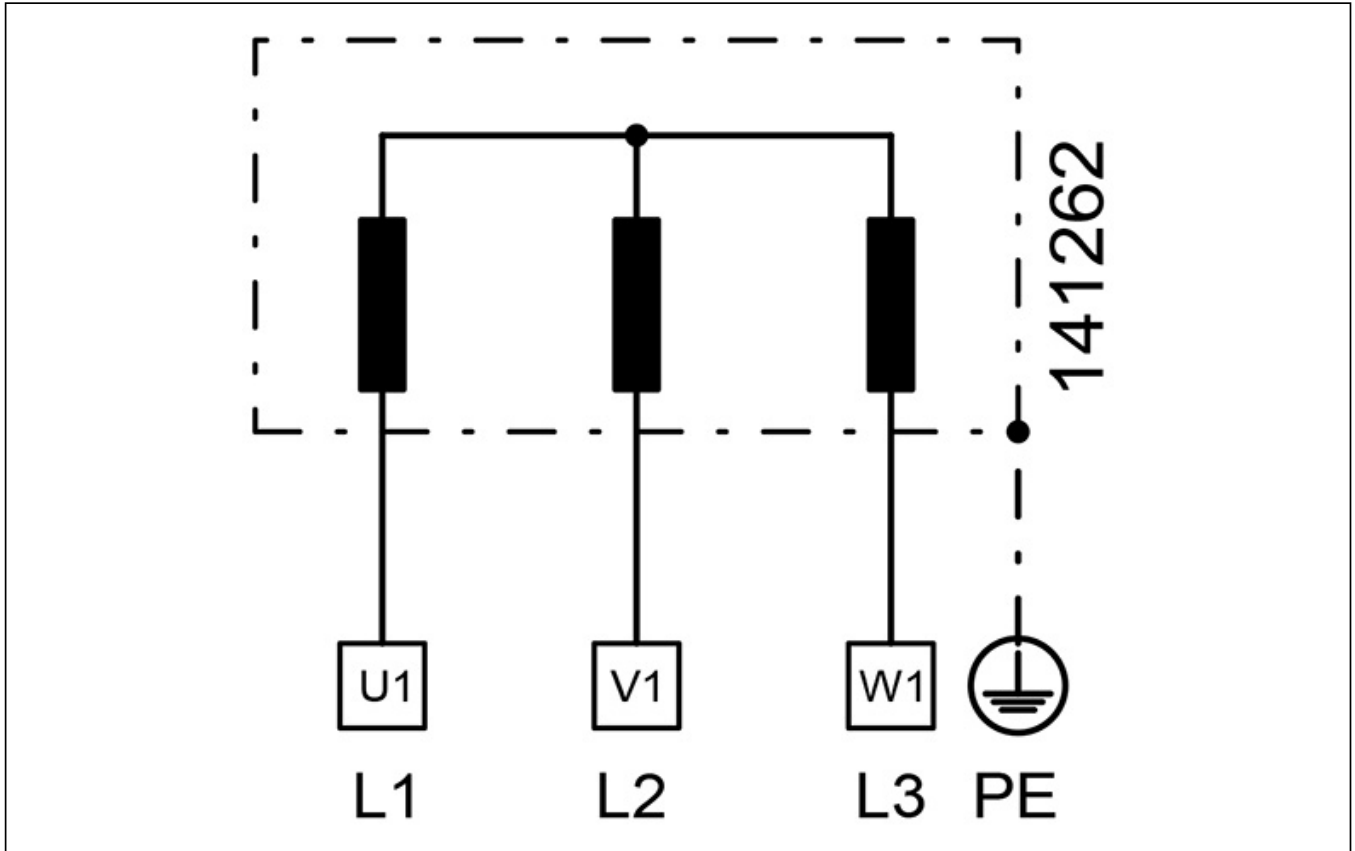

MECHANICAL ACCESSORIES

RSK 250D | 113488



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps
- Integrated gasket

WK MPS 07 | 127953



- Wall mounting bracket for box fan
- Galvanized steel sheet
- 1 Pack = 2 pieces

VM 250 | 102651



- Fast clamps for sound decoupling and sealing
- Galvanized steel sheet, 5 mm
- Neopren gasket
- 1 Pack = 2 pieces

RSK 250 | 102686



- Back draught shutter for tube fitting
- Galvanized steel sheet housing
- Aluminum flaps

WSH MPS | 103661



- Weather protection hood for motor
- Galvanized steel sheet



to the product detail page

ELECTRICAL ACCESSORIES

GS 03 | 107633



- Device switch
- $U_{max} = 400\text{ V}$, $I_{max} = 25\text{ A}$
- Switching capacity $400\text{ V } 3\sim = 5,5\text{ kW}$
- Protection class IP 55

MS 01 | 140407



- Motor protection switch with Isolator switchfunktion
- $I_{max} = 400\text{ V}$, $50/60\text{ Hz}$
- Max. 0.55 kW
- Protection class IP 55

MTP 20 | 128146



- Potentiometer $10\text{ k}\Omega$
- Switching contact $1\text{ A}/250\text{ V AC}$ - $2,5\text{ A}/12\text{ V DC}$
- Max. ambient temperature $50\text{ }^{\circ}\text{C}$
- VDE

MTP 30 | 143289



- Stepped potentiometer $10\text{ k}\Omega$
- Step 1 + 2 settable $10\text{ \%}$ - $100\text{ \% Vdc}$
- Step 3 $100\text{ \% Vdc}$
- Supply voltage $+10\text{ Vdc}$

MTP 40 | 147359



- Potentiometer $10\text{ k}\Omega$
- Connection in terminal box
- Max. ambient temperature $50\text{ }^{\circ}\text{C}$
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature $0\dots+50\text{ }^{\circ}\text{C}$
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output $0-10\text{ V DC}$ + FC enable + setpoint reached
- Pressure setting by means of decade switch

FU 075 09 | 141837



- Frequency converter
- Supply voltage $230\text{ V } 1\sim 50/60\text{ Hz}$
- Output voltage $0 - 230\text{ V } 3\sim$
- Protection class IP 20, for switch cabinet

FU 075 15 | 141848



- Frequency converter IP66
- Supply voltage $230\text{ V } 1\sim 50/60\text{ Hz}$
- Output voltage $0 - 230\text{ V } 3\sim$
- Fire mode function (smoke extract fans)

FU 075 21 | 141859



- Frequency converter
- Supply voltage $400\text{ V } 3\sim 50/60\text{ Hz}$
- Output voltage $0 - 400\text{ V } 3\sim$
- Protection class IP 20, for switch cabinet

FU 075 27 | 141870



- Frequency converter
- Supply voltage $400\text{ V } 3\sim 50/60\text{ Hz}$
- Output voltage $0 - 400\text{ V } 3\sim$
- Fire mode function (smoke extract fans)

MTP 50 | 153133



- Potentiometer with multifunction output
- $230\text{ VAC } \pm 10\text{ \%}$ / $50-60\text{ Hz}$
- Selectable output: $1-10\text{ VDC}$ / $2-20\text{ mA}$ / $10-100\text{ \% PWM}$
- Min. and max. output value adjustable

