

AL 1250 D6 04

162592


ruck

- Innovative, high-efficiency axial fan
- Optimally tuned, CFD-optimized aerodynamics
- Housing weight optimized, powder coated
- Efficient IE3 motor, frequency controllable
- Conveyed medium temperature up to 60 °C in continuous operation
- Exceeds current ErP regulation by 15 - 20%



FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

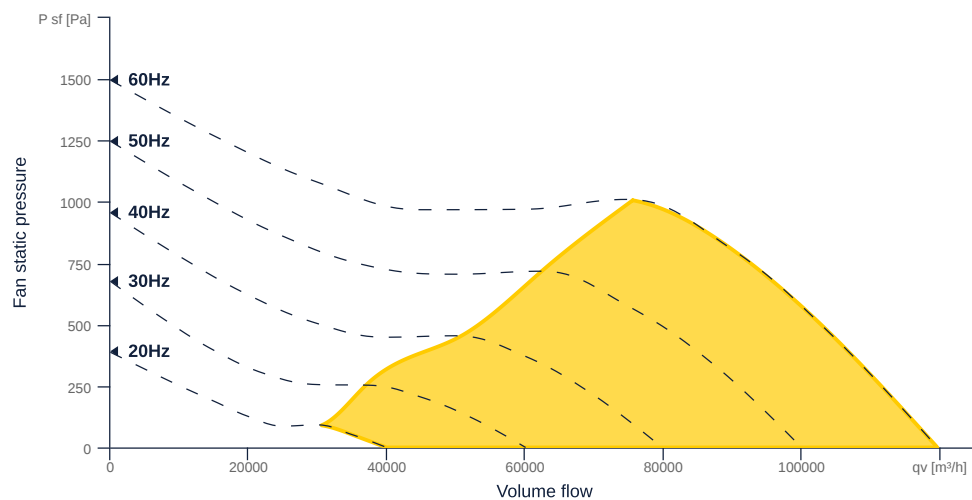

to the product detail page

AL 1250 D6 04

162592

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		$W \times H_{duct}$
Pipe connection size (DN)	DN1250		DN
Rated voltage (entire device)	400	V	U_{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	80 A		fuse
Housing material	Steel		mat_{casing}
Impeller material	Steel		$mat_{impeller}$
IP-protection class (entire device)	IPX4		IP_{compl}
IP-Protection class (terminal box)	IP55		IP_{ebox}
Weight	550	kg	m
Fan type	Axial		Fan_{type}
Category / Installation situation	B		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	37683	W	$P_{ed, max}$
Max. operating current (device)	68.8	A	$I_{ed, max}$
Max. speed	1190	1/min	n_{max}
Max. stat. efficiency	56.2	%	η_{es}
Max. fan efficiency	71.3	%	η_e
Max. flowrate	119640	m^3/h	$Q_{v, max}$
Max. stat pressure	1015	Pa	$p_{sf, max}$
Max. medium temperature	60	°C	$T_{m, max}$
Max. environment temperature	60	°C	$T_{amb, max}$
Min. environment temperature	-20	°C	$T_{amb, min}$



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Isolation class		ISO F		ISOclass
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwsupmotor
Number of poles (1)		6.000000		num polesw1
Connection	Δ			wiringw1
Connection (wiring 2)	Y			wiringw2
Rated voltage	400		V	Urated, f1
Rated voltage (wiring 2)	690		V	Urated, f2
Rated current	56		A	Irated, f1
Rated current (wiring 2)	32.5		A	Irated, f2
Shaft power	30000		W	Pout, f1
Shaft power (wiring 2)	30000		W	Pout, f2
Speed	982		1/min	n _{f1}
Speed (wiring 2)	982		1/min	n _{f2}
Starting current	364		A	Istart, f1
Starting current (wiring 2)	211		A	Istart, f2
Efficiency	93.1		%	η _m , f1
Efficiency (wiring 2)	93.1		%	η _m , f2
Efficiency class	IE3			IE _{motor}
Min. temperature	-20		°C	T _{motor} , min
Cos Phi	0.830000	0.000000		cos φ
UL-Certification motor		UL recognized		ULcert


ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	1182	1/min	n _{opt}
Efficiency level	70.4	%	N
Efficiency category	total		cat _{efficiency}
Input power of the motor at the energy efficiency optimum	36.71	kW	P _e , opt
Overall efficiency	69.4	%	η _{ges}
Measurement category	B		meas cat
Fan pressure at energy efficiency optimum	987	Pa	p _f , opt
Flowrate at energy efficiency optimum	94235	m³/h	Q _v , opt



to the product detail page


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

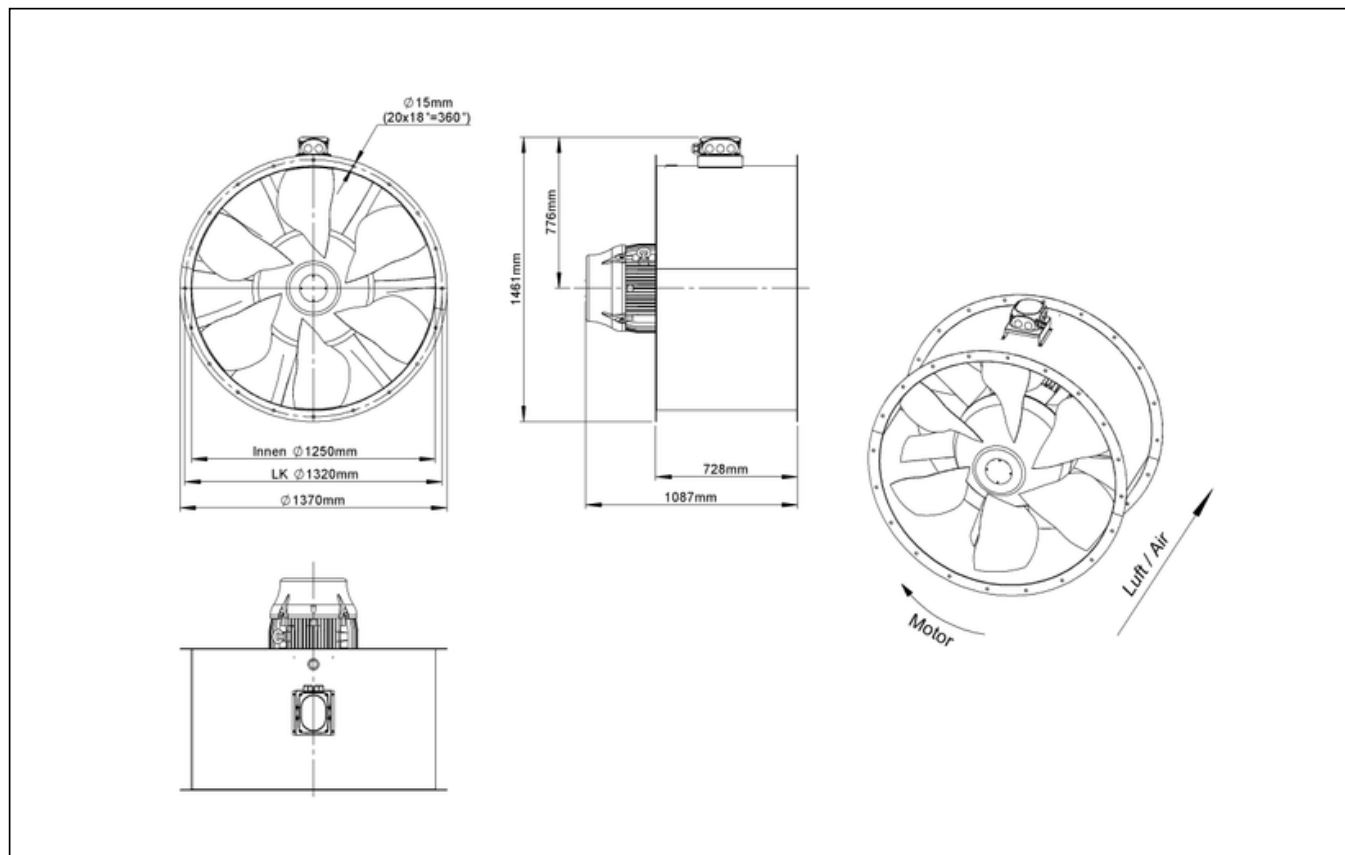

AL 1250 D6 04

162592


ruck

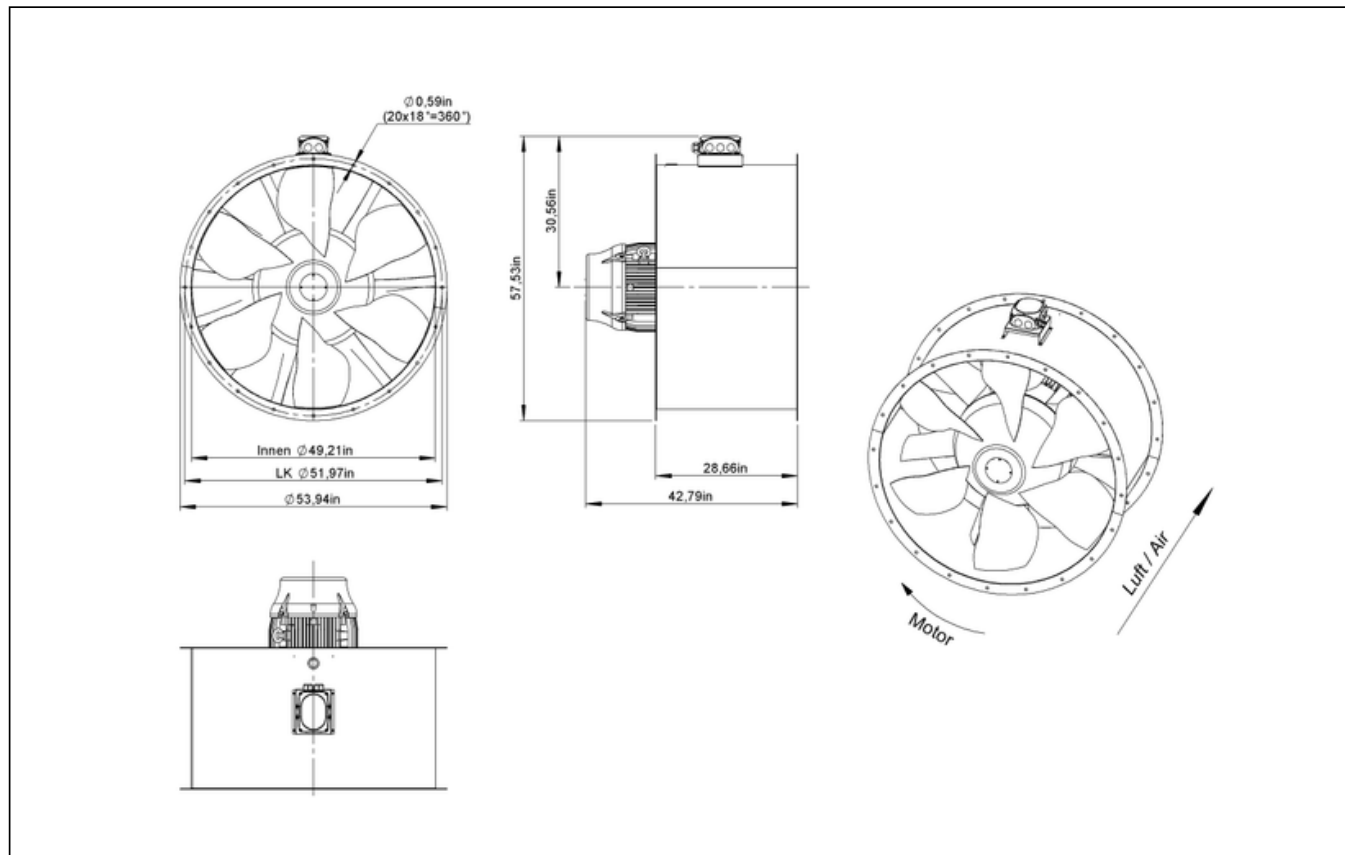

AL 1250 D6 04


162592

ruck

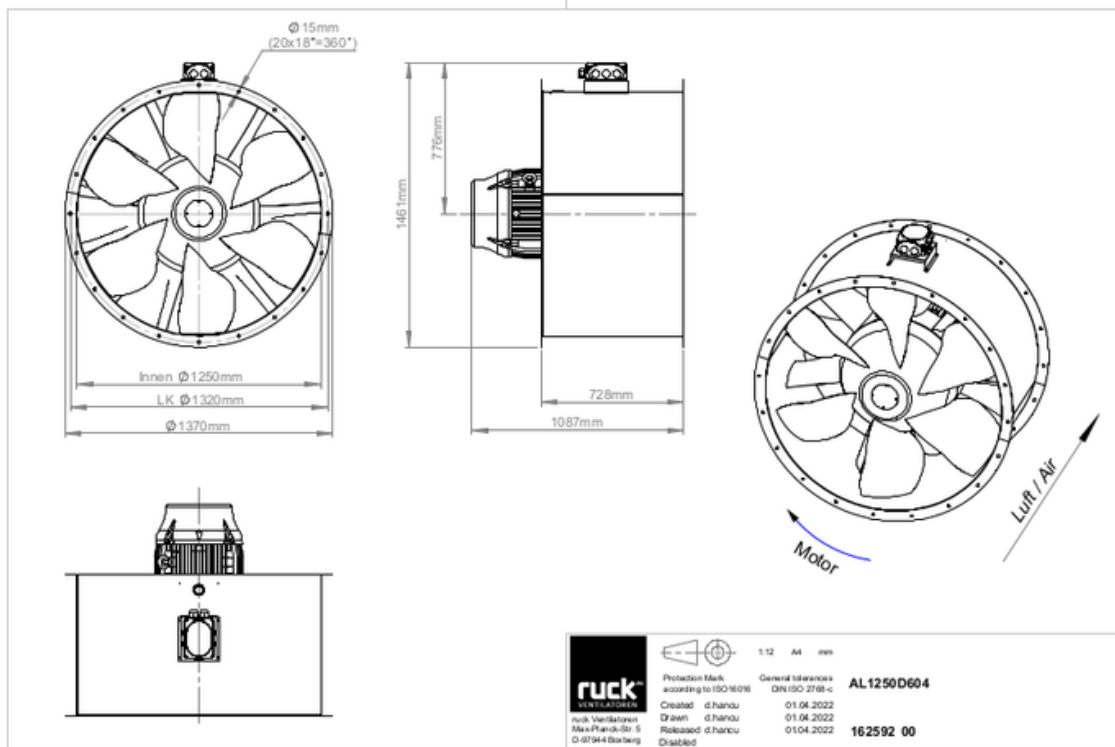


AL 1250 D6 04

162592

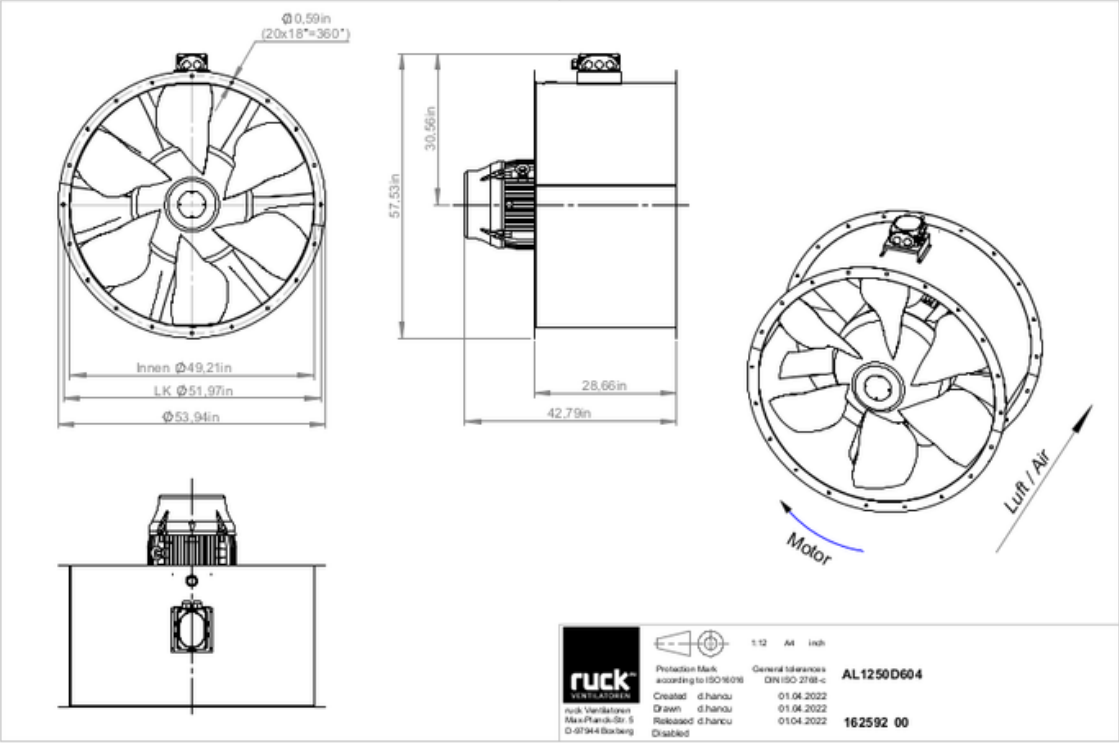

AL 1250 D6 04

162592

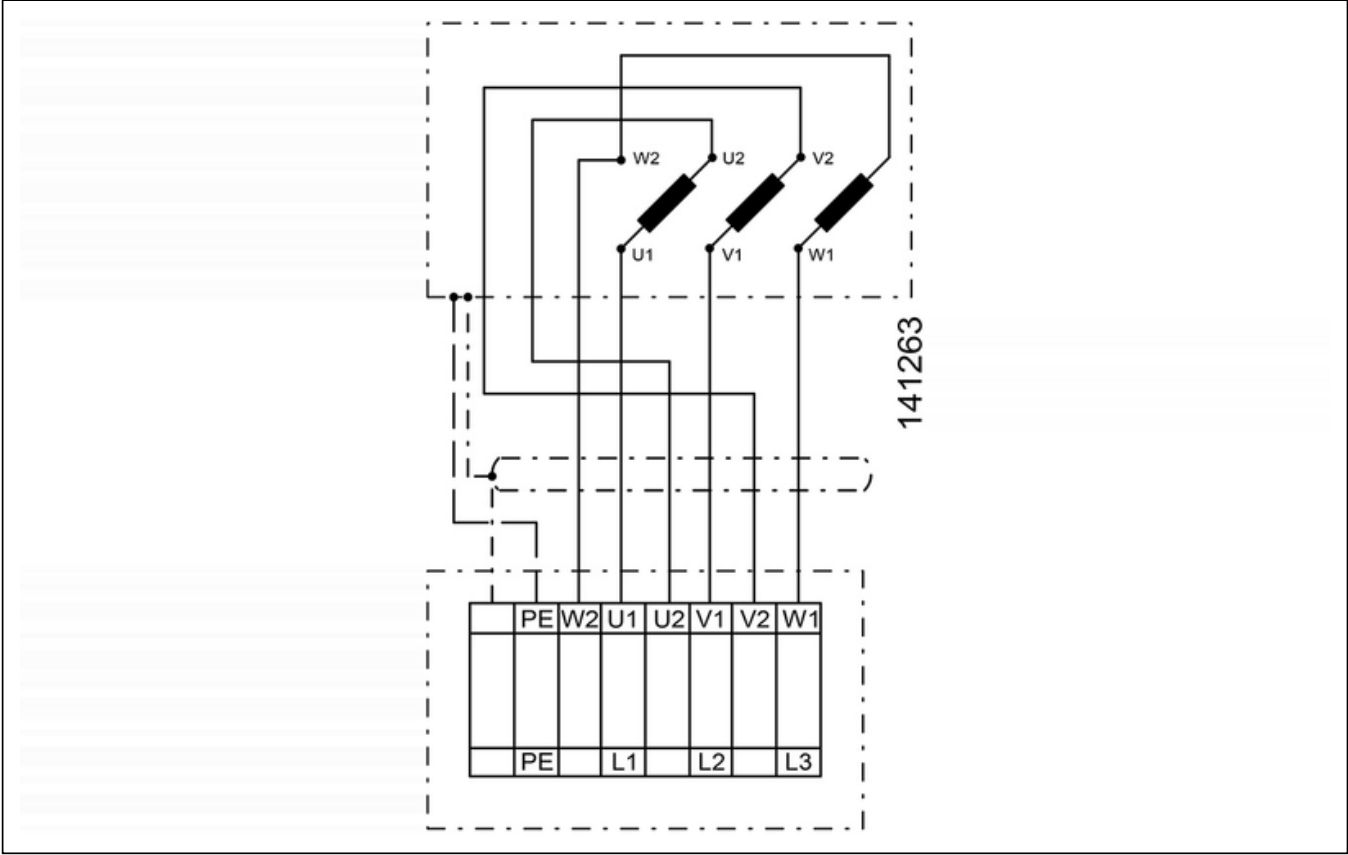

MECHANICAL ACCESSORIES

ESD 1250 | 157580




- Inlet cone
- Steel sheet, powder coated
- Flange mounting

FAL 1250 | 157901




- Mounting foot
- Sheet steel, powder coated
- Flange mounting

SGW 1250 | 159544




- Protection grille, wide meshed
- Steel sheet, galvanized
- Flange mounting

SGW 1400 | 160421



- Protection grille, wide meshed
- Steel sheet, galvanized
- Flange mounting

SGE 1250 | 159520



- Protection grille, narrow meshed
- Steel sheet, galvanized
- Flange mounting

FSD 09 | 162478



- Set of 4 vibration dampers
- Made of natural rubber, hardness 55 Shore A

RAF 1250 | 157503



- Round flange
- Sheet steel, powder coated

RAS 1250 | 157645



- Round spigot, flexible
- Galvanized steel sheet, plastic band (PES)
- Temperature resistant up to 75 °C
- Flange mounting

RVS 1250 02 | 161366




- Tube connection spigot
- Sheet steel, powder coated
- Suitable for outdoor installation
- Flange mounting

FSD 11 | 162489



- Set of 4 vibration dampers
- All metal design, galvanized

TRA 1120-1250 | 163013



- Crossbeam
- Connection between mounting feet
- Galvanized steel sheet

RVK 1250 | 157847



- Automatic tube shutter
- Sheet steel, powder coated
- For vertical installation
- Flange mounting

RVK H 1250 | 164022



- Automatic tube shutter
- Sheet steel, powder coated
- For horizontal installation
- Flange mounting

MR 1250 | 166134



- Mounting ring
- For vertical mounting
- Powder-coated sheet steel
- Flange mounting DN 1250



ELECTRICAL ACCESSORIES

MS 11 | 160189



- Motor protection switch with device switch function
- For three phase motors
- I_{max} = 58 A

MTP 20 | 128146



- Potentiometer 10 kΩ
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 kΩ
- Step 1 + 2 settable 10 % - 100 % V_{dc}
- Step 3 100 % V_{dc}
- Supply voltage +10 V_{dc}

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

FU 300 08 | 161421



- Frequency converter
- Supply voltage 400 V 3~ 50/60 Hz
- Output voltage 0 - 400 V 3~
- Fire mode function (smoke extract fans)

FU 300 07 | 161420



- Frequency converter
- Supply voltage 400 V 3~ 50/60 Hz
- Output voltage 0 - 400 V 3~
- Protection class IP 20, for switch cabinet



to the product detail page