


AL 400 EC 01

154093


ruck

- Innovative, high-efficiency axial fan
- Optimally tuned, CFD-optimized aerodynamics
- Housing weight optimized, powder coated
- High efficiency IE5 motor, steplessly controllable
- Conveyed medium temperature up to 60 °C in continuous operation
- Exceeds current ErP regulation by 15 - 20%

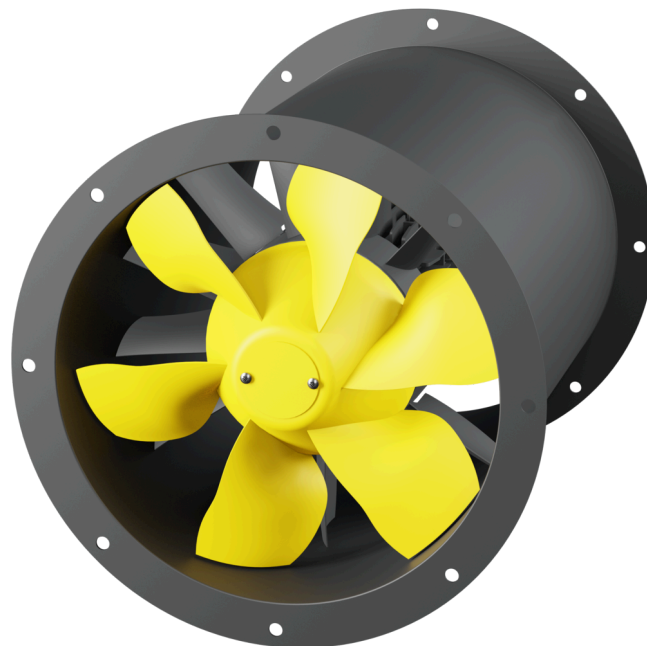

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

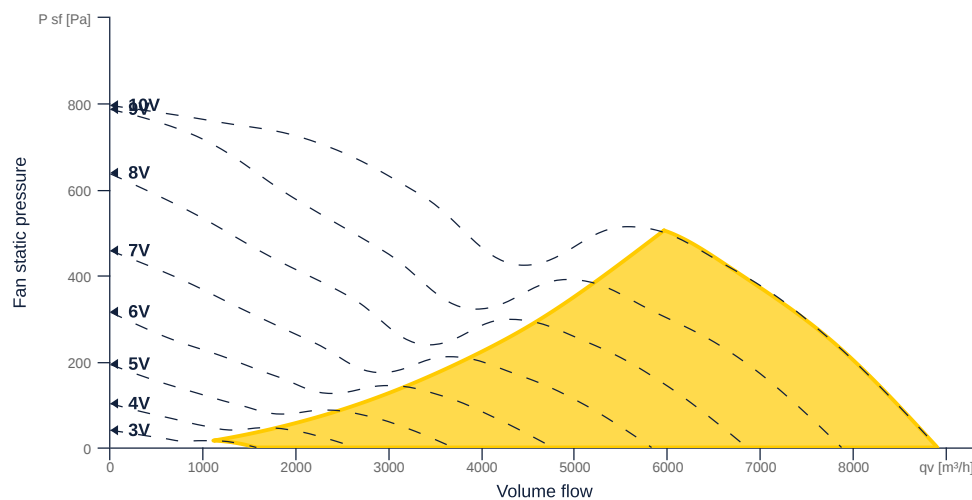

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxHduct
Pipe connection size (DN)	DN400		DN
Rated voltage (entire device)	230	V	Urated
Phases (entire device)	1~		phase
Electrical protection (entire device)	16 A		fuse
Housing material	Steel		matcasing
Impeller material	Steel		matimpeller
Weight	20.41	kg	m
Fan type	Axial		Fan _{type}
Category / Installation situation	B		cat

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	1460	1460	W	P _{ed, max}
Max. operating current (device)	10.3	10.3	A	I _{ed, max}
Max. speed	2610	2610	1/min	n _{max}
Max. stat. efficiency	57.2	57.2	%	η _{es}
Max. fan efficiency	73.5	73.5	%	η _e
Max. flowrate	8900	8900	m³/h	Q _{v, max}
Max. stat pressure	510	510	Pa	p _{sf, max}
Max. medium temperature	60	60	°C	T _{m, max}
Max. environment temperature	60	60	°C	T _{amb, max}
Min. environment temperature	-20	-20	°C	T _{amb, min}



MOTOR DATA


Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		IRM (In)		install
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwrsupmotor
Rated voltage	220		V	U _{rated, f1}
Rated voltage (wiring 2)	277		V	U _{rated, f2}
Rated current	8.7		A	I _{rated, f1}
Rated current (wiring 2)	6.9		A	I _{rated, f2}
Shaft power	1100		W	P _{out, f1}
Shaft power (wiring 2)	1100		W	P _{out, f2}
Speed	3000		1/min	n _{f1}
Speed (wiring 2)	3000		1/min	n _{f2}
Efficiency	87.8		%	η _{m, f1}
Efficiency (wiring 2)	87.8		%	η _{m, f2}
Min. temperature	-20		°C	T _{motor, min}
UL-Certification motor		None		ULcert

ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	2602	1/min	n _{opt}
Efficiency level	80.9	%	N
Efficiency category	total		catefficiency
Input power of the motor at the energy efficiency optimum	1.52	kW	P _{e, opt}
Overall efficiency	86.1	%	η _{ges}
Measurement category	B		meas cat
Fan pressure at energy efficiency optimum	595	Pa	p _{f, opt}
Flowrate at energy efficiency optimum	6697	m³/h	Q _{v, opt}




CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

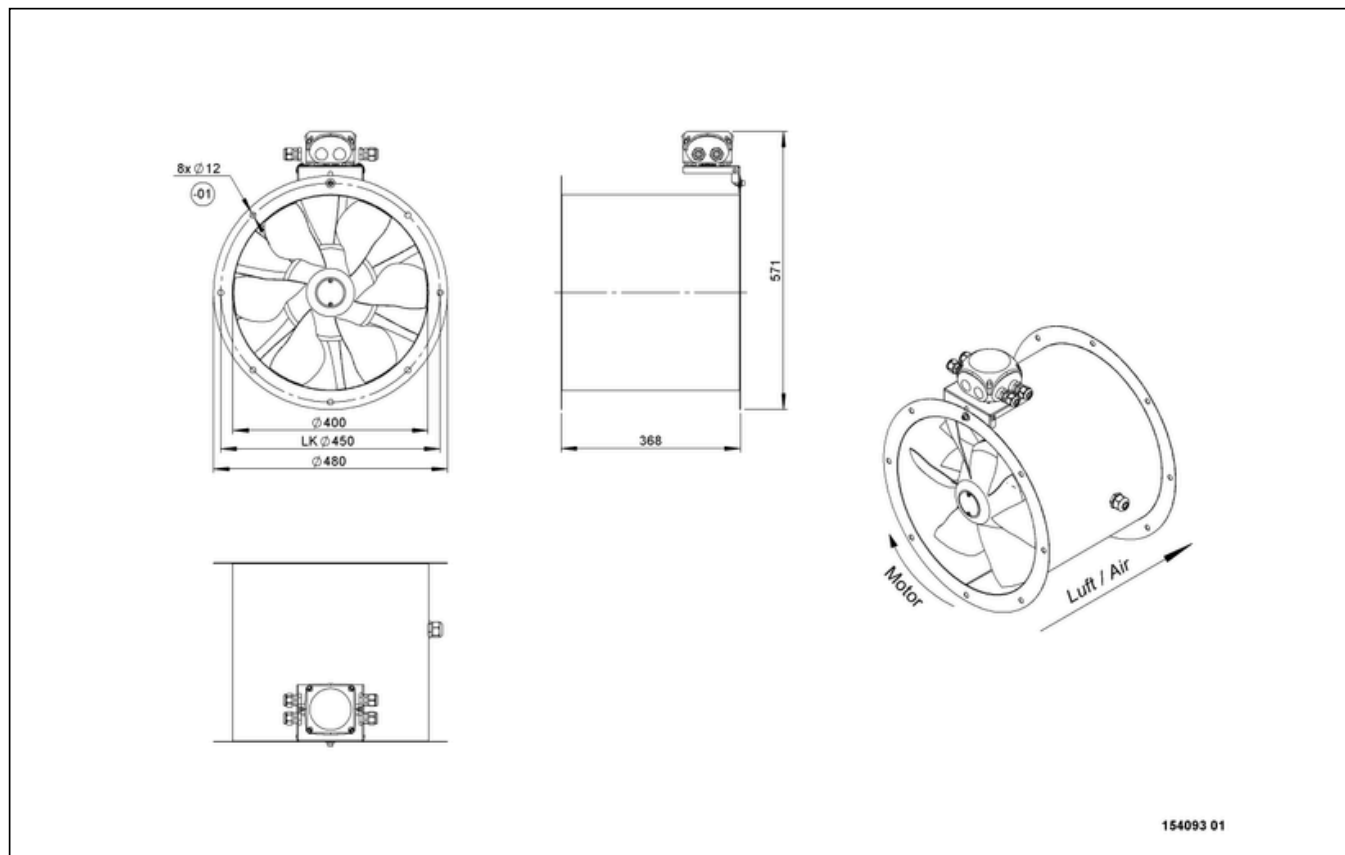


AL 400 EC 01

154093

ruck




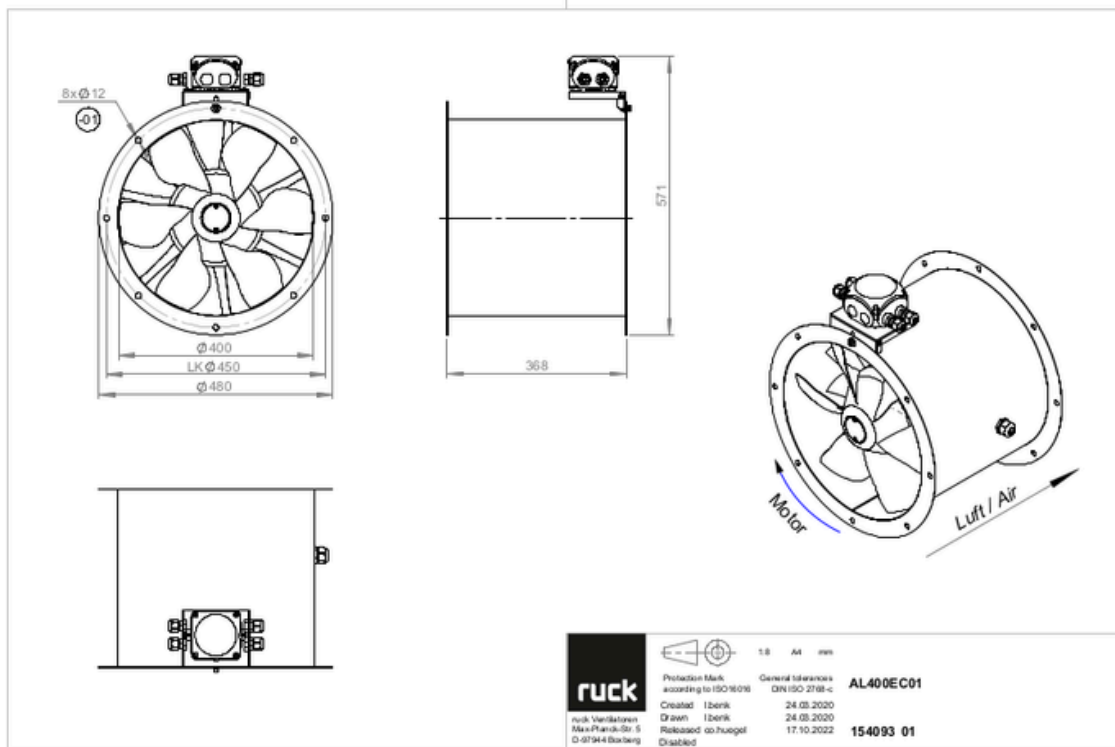


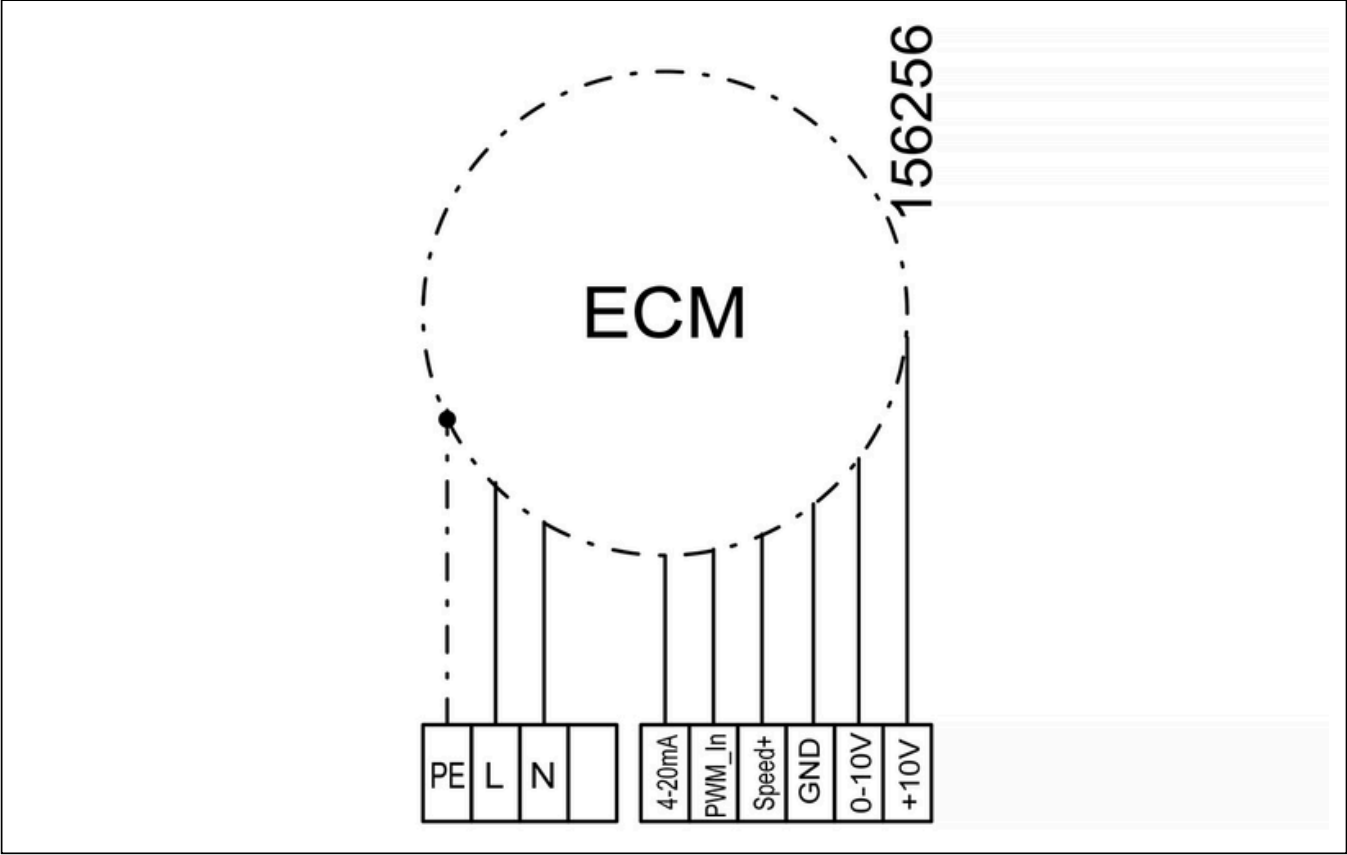

AL 400 EC 01

154093

ruck

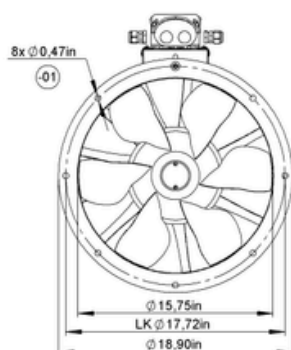


154093 01



AL 400 EC 01

154093

ruck

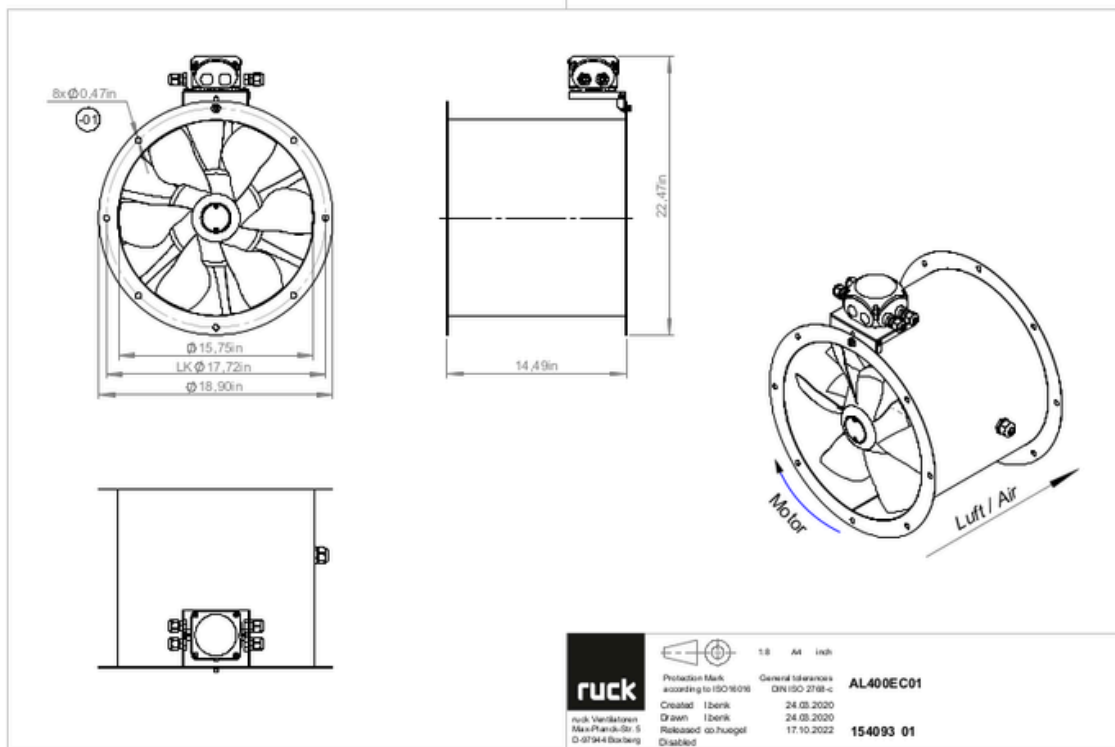

MECHANICAL ACCESSORIES

RVK 400 | 153701



- Automatic tube shutter
- Sheet steel, powder coated
- For vertical installation
- Flange mounting

RVK H 400 | 153926



- Automatic tube shutter
- Sheet steel, powder coated
- For horizontal installation
- Flange mounting

RAF 400 | 154019



- Round flange
- Sheet steel, powder coated

RVS 400 | 154183



- Tube connection spigot
- Sheet steel, powder coated
- Suitable for outdoor installation
- Flange mounting

ESD 400 | 153959




- Inlet cone
- Steel sheet, powder coated
- Flange mounting

FAL 400 | 154807




- Mounting foot
- Sheet steel, powder coated

SGW 400 | 154050




- Protection grille, wide meshed
- Steel sheet, galvanized
- Flange mounting

SGW 450 | 154051



- Protection grille, wide meshed
- Steel sheet, galvanized
- Flange mounting

SGE 400 | 154074



- Protection grille, narrow meshed
- Steel sheet, galvanized
- Flange mounting

FSD 01 | 155498



- Set of 4 vibration dampers
- All metal design, galvanized

FSD 05 | 155502



- Set of 4 vibration dampers
- Made of natural rubber, hardness 55 Shore A

RAS 400 | 154248



- Round spigot, flexible
- Galvanized steel sheet, plastic band (PES)
- Temperature resistant up to 75 °C
- Flange mounting

MR 400 | 165742



- Mounting ring
- For vertical mounting
- Powder-coated sheet steel
- Flange mounting DN 400



ELECTRICAL ACCESSORIES

GS 02 | 105386



- Isolator switch
- $U_{max} = 400 \text{ V}$, 50/60 Hz
- Switching capacity $400 \text{ V } 3\sim = 5,5 \text{ kW}$
- $I_{max} = 16 \text{ A}$

MTP 20 | 128146



- Potentiometer $10 \text{ k}\Omega$
- Switching contact $1\text{A}/250\text{V AC}$ - $2,5\text{A}/12\text{V DC}$
- Max. ambient temperature $50 \text{ }^\circ\text{C}$
- VDE

MTP 30 | 143289



- Stepped potentiometer $10 \text{ k}\Omega$
- Step 1 + 2 settable $10\% - 100\% \text{ Vdc}$
- Step 3 $100\% \text{ Vdc}$
- Supply voltage $+10 \text{ Vdc}$

MTP 40 | 147359



- Potentiometer $10 \text{ k}\Omega$
- Connection in terminal box
- Max. ambient temperature $50 \text{ }^\circ\text{C}$
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature $0...+50 \text{ }^\circ\text{C}$
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output $0-10 \text{ V DC}$ + FC enable + setpoint reached
- Pressure setting by means of decade switch



to the product detail page