


AL 500 D4 01


154111

- Innovative, high-efficiency axial fan
- Optimally tuned, CFD-optimized aerodynamics
- Housing weight optimized, powder coated
- Efficient IE3 motor, frequency controllable
- Conveyed medium temperature up to 60 °C in continuous operation
- Exceeds current ErP regulation by 15 - 20%

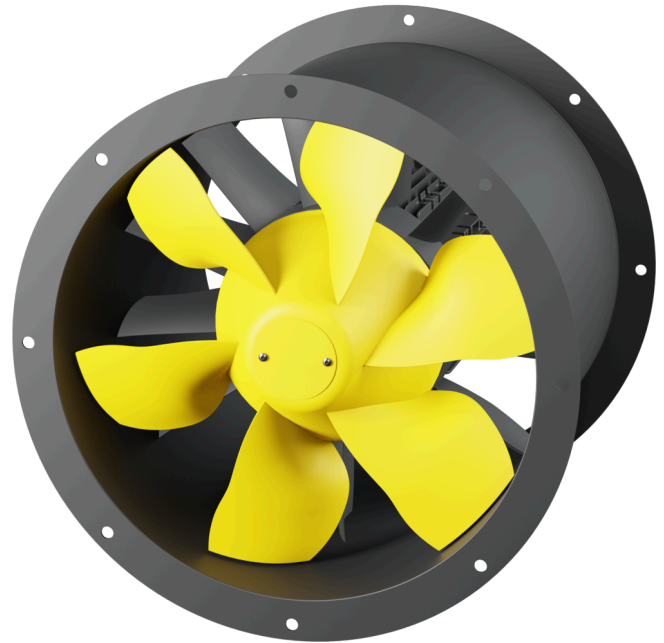

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

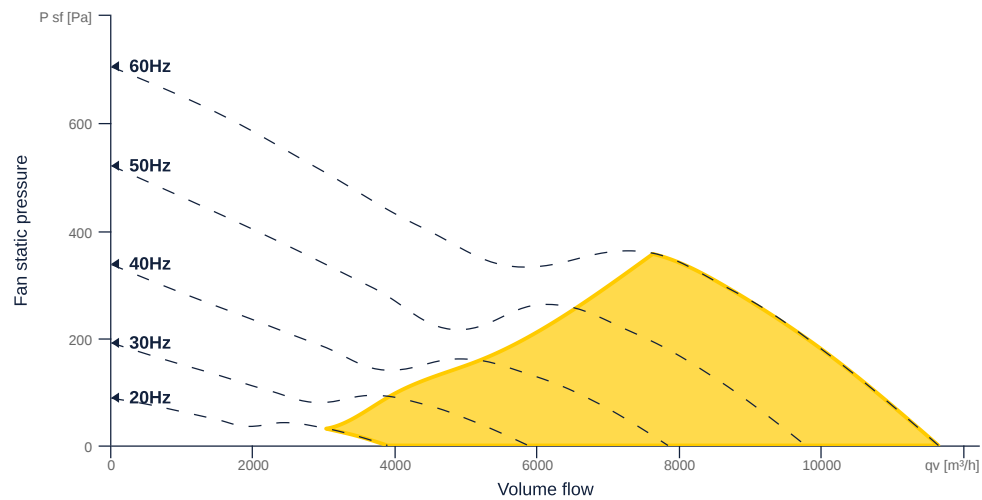

to the product detail page

AL 500 D4 01

154111

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		$W \times H_{duct}$
Pipe connection size (DN)	DN500		DN
Rated voltage (entire device)	400	V	U_{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Steel		matcasing
Impeller material	Steel		matimpeller
Weight	38.5	kg	m
Fan type	Axial		Fan _{type}
Category / Installation situation	B		cat

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	1132	W	$P_{ed, max}$
Max. operating current (device)	2.5	A	$I_{ed, max}$
Max. speed	1760	1/min	n_{max}
Max. stat. efficiency	50.9	%	η_{es}
Max. fan efficiency	65.5	%	η_e
Max. flowrate	11640	m ³ /h	$Q_{v, max}$
Max. stat pressure	360	Pa	$p_{sf, max}$
Max. medium temperature	60	°C	$T_{m, max}$
Max. environment temperature	60	°C	$T_{amb, max}$
Min. environment temperature	-20	°C	$T_{amb, min}$



MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		AC 3~		phase
Control type		frequency-controlled		ctrltype
Installation type		IRM (In)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Number of poles (1)		4.000000		num polesw1
Connection	Δ	Y		wiringw1
Connection (wiring 2)	Y			wiringw2
Rated voltage	230	460	V	U _{rated, f1}
Rated voltage (wiring 2)	400		V	U _{rated, f2}
Rated current	4.17	2.1	A	I _{rated, f1}
Rated current (wiring 2)	2.4		A	I _{rated, f2}
Shaft power	1100	1100	W	P _{out, f1}
Shaft power (wiring 2)	1100		W	P _{out, f2}
Speed	1455	1760	1/min	n _{f1}
Speed (wiring 2)	1455		1/min	n _{f2}
Starting current	31.7	17.9	A	I _{start, f1}
Starting current (wiring 2)	18.2		A	I _{start, f2}
Efficiency	84.8	86.5	%	η _{m, f1}
Efficiency (wiring 2)	84.8		%	η _{m, f2}
Efficiency class	IE3	IE3		IE _{motor}
Min. temperature	-20		°C	T _{motor, min}
Cos Phi	0.780000	0.760000		cos φ
UL-Certification motor		UL recognized		ULcert



AL 500 D4 01


154111




ERP DATA (LOT11)

Name	Value	Unit	Formula symbol
Speed at the energy efficiency optimum	1751	1/min	n_{opt}
Efficiency level	63.3	%	N
Efficiency category	total		cat _{efficiency}
Input power of the motor at the energy efficiency optimum	1.27	kW	$P_{e, opt}$
Overall efficiency	73.2	%	η_{ges}
Measurement category	B		meas cat
Fan pressure at energy efficiency optimum	334	Pa	$p_{f, opt}$
Flowrate at energy efficiency optimum	8466	m³/h	$q_{v, opt}$

CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

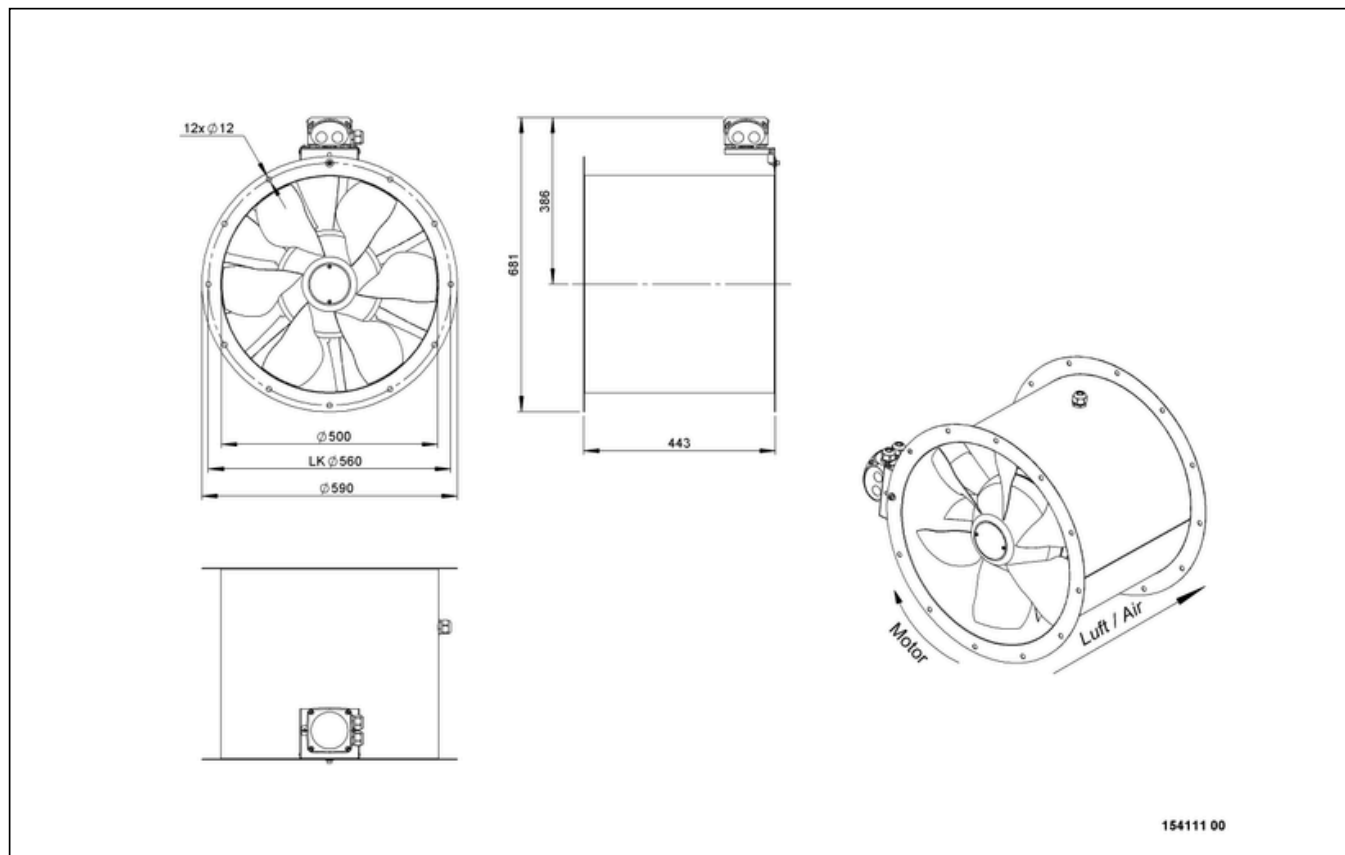


AL 500 D4 01
154111

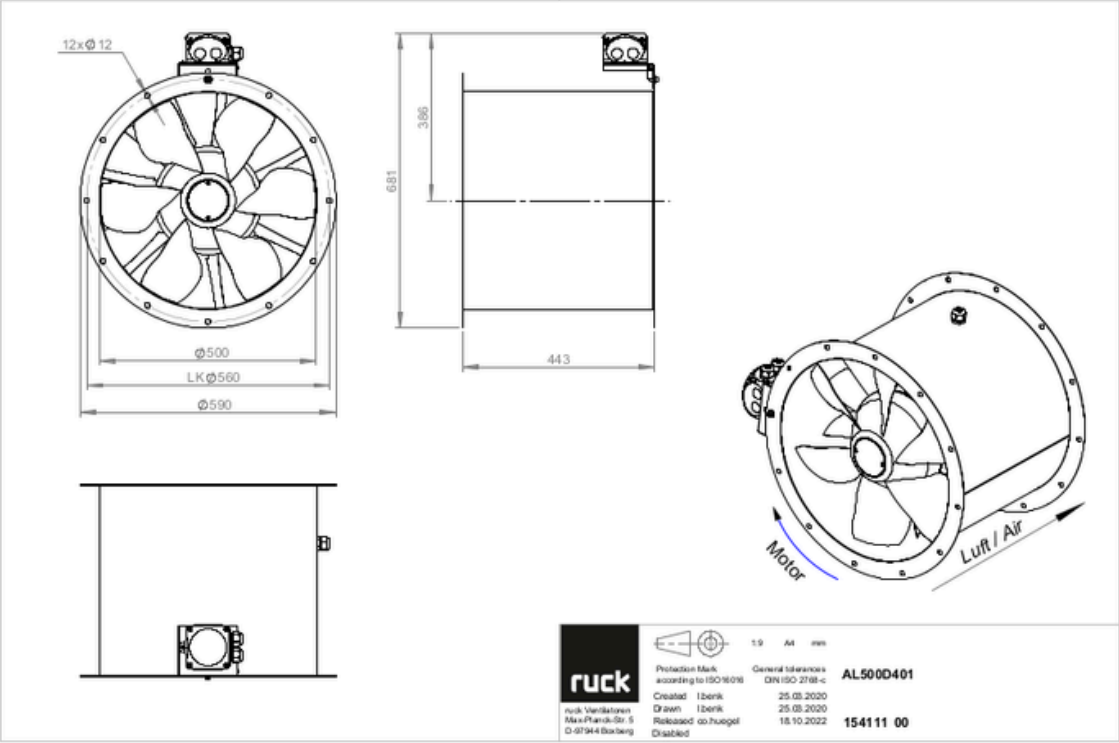

AL 500 D4 01

154111




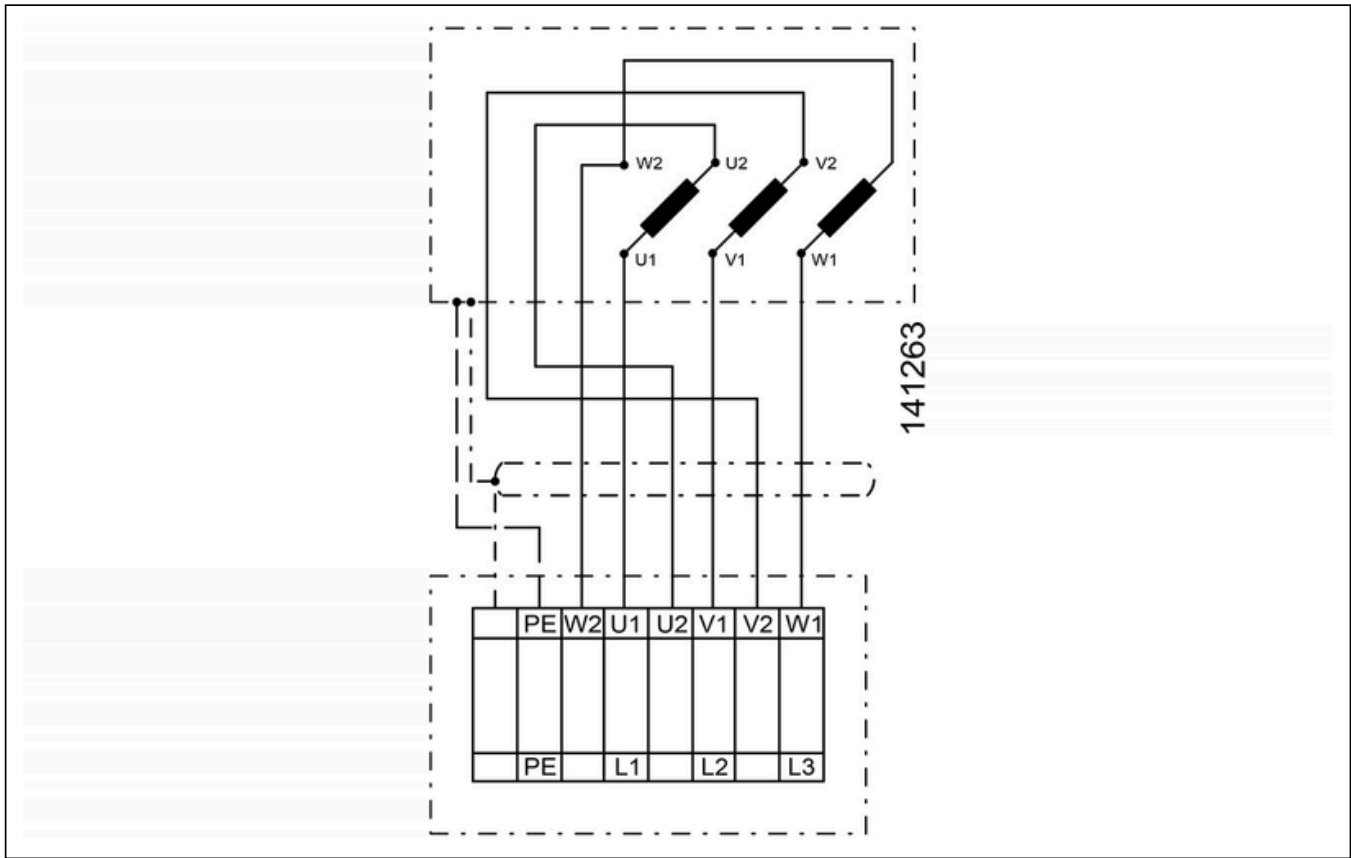


to the product detail page

AL 500 D4 01

154111


ruck

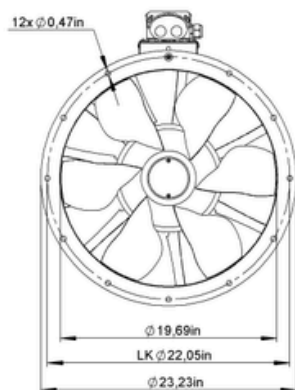

154111 00



AL 500 D4 01
154111

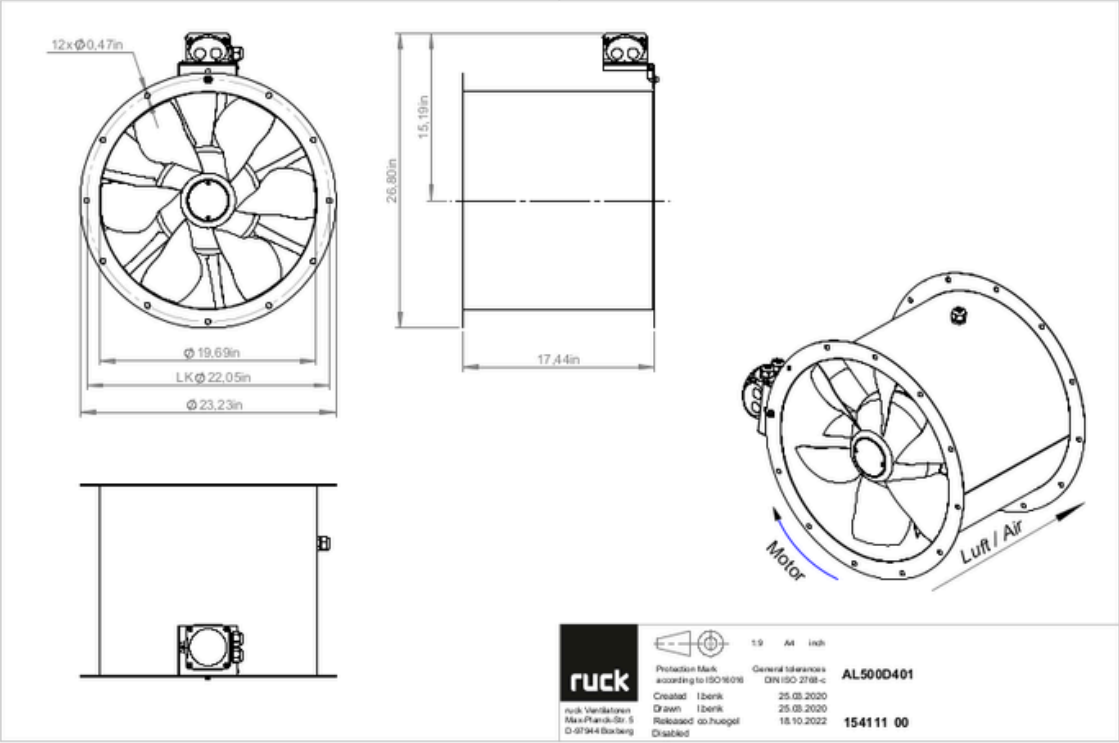

MECHANICAL ACCESSORIES

RVK 500 | 153900



- Automatic tube shutter
- Sheet steel, powder coated
- For vertical installation
- Flange mounting

RVK H 500 | 154688



- Automatic tube shutter
- Sheet steel, powder coated
- For horizontal installation
- Flange mounting

RAF 500 | 154021



- Round flange
- Sheet steel, powder coated

RVS 500 | 154193



- Tube connection spigot
- Sheet steel, powder coated
- Suitable for outdoor installation
- Flange mounting

ESD 500 | 153956




- Inlet cone
- Steel sheet, powder coated
- Flange mounting

FAL 500 | 154809



- Mounting foot
- Sheet steel, powder coated

SGW 560 | 154053



- Protection grille, wide meshed
- Steel sheet, galvanized
- Flange mounting

FSD 02 | 155499




- Set of 4 vibration dampers
- All metal design, galvanized

FSD 05 | 155502



- Set of 4 vibration dampers
- Made of natural rubber, hardness 55 Shore A

SGW 500 | 154052




- Protection grille, wide meshed
- Steel sheet, galvanized
- Flange mounting

RAS 500 | 154250



- Round spigot, flexible
- Galvanized steel sheet, plastic band (PES)
- Temperature resistant up to 75 °C
- Flange mounting

SGE 500 | 154076



- Protection grille, narrow meshed
- Steel sheet, galvanized
- Flange mounting

MR 500 | 165814



- Mounting ring
- For vertical mounting
- Powder-coated sheet steel
- Flange mounting DN 500



ELECTRICAL ACCESSORIES

GS 02 | 105386



- Isolator switch
- Umax = 400 V, 50/60 Hz
- Switching capacity 400 V 3~ = 5,5 kW
- Imax = 16 A

MS 02 | 140409



- Motor protection switch with Isolator switchfunktion
- Imax = 400 V, 50/60 Hz
- Max. 1.5 kW
- Protection class IP 55

MTP 20 | 128146



- Potentiometer 10 kΩ
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 kΩ
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage+10 Vdc

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

FU 15 28 | 155169



- Frequency converter
- Supply voltage 230 V 1~ 50/60 Hz
- Output voltage 0 - 230 V 3~
- Protection class IP 20, for switch cabinet

FU 15 29 | 155170



- Frequency converter IP66
- Supply voltage 230 V 1~ 50/60 Hz
- Output voltage 0 - 230 V 3~
- Fire mode function (smoke extract fans)

FU 15 30 | 155171



- Frequency converter
- Supply voltage 400 V 3~ 50/60 Hz
- Output voltage 0 - 400 V 3~
- Protection class IP 20, for switch cabinet

FU 15 31 | 155172



- Frequency converter
- Supply voltage 400 V 3~ 50/60 Hz
- Output voltage 0 - 400 V 3~
- Fire mode function (smoke extract fans)

