


DVA 355 ECP 31


139203

- Backward curved radial impeller
- Vertical discharge
- Housing made of aluminum AlMg3
- High efficiency EC motor, steplessly controllable
- Conveyed medium temperature up to 60 °C in continuous operation
- Integrated device switch

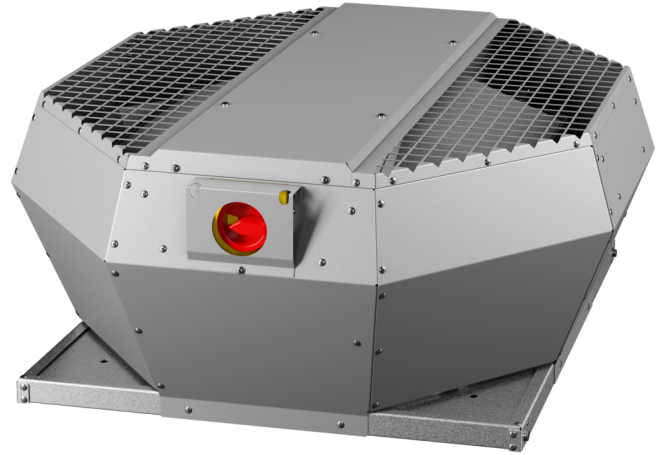

MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

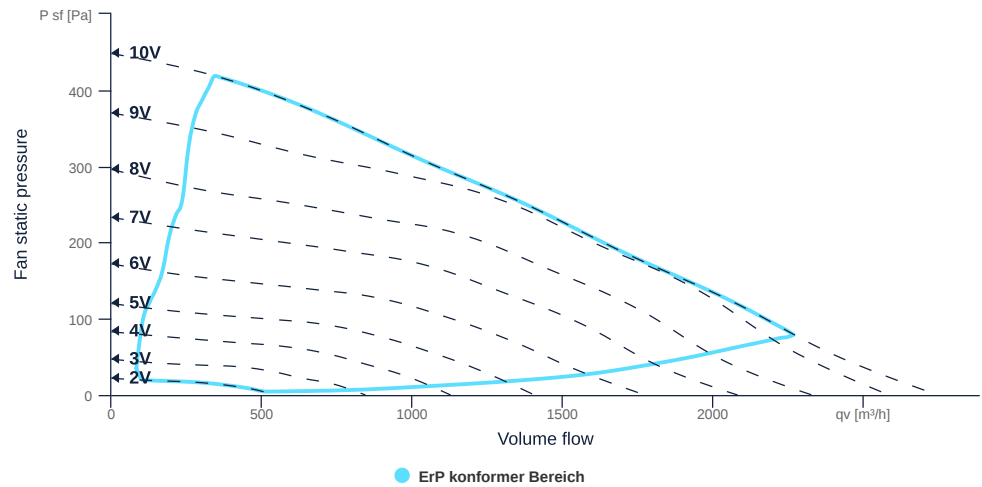

to the product detail page

DVA 355 ECP 31

139203

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN400		DN
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (casing)	IP44		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
IP-Protection class (terminal box)	IP44		IP _{ebox}
Weight	15.36	kg	m
Nominal air flow rate, nominal point m³/h	1393.2	m³/h	q _{v,nom}
Nominal external pressure, static	248.3	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	0.39	m³/s	q _{v,nom}
Actual electrical input power, nominal point	0.16	kW	P _{e,nom}
Face velocity, nominal point	2.4	m/s	v _{nom}
Nominal external pressure, static	248.3	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	63.4	%	η _{es,SUP}
Enclosure sound level, nominal point	76	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



to the product detail page

DVA 355 ECP 31

139203

ruck

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	165	165	W	P _{ed, max}
Max. operating current (device)	1.4	1.4	A	I _{ed, max}
Max. speed	1545	1545	1/min	n _{max}
Max. stat. efficiency	55.2	55.2	%	η _{es}
Max. fan efficiency	56	56	%	η _e
Max. flowrate	2750	2750	m³/h	Q _{v, max}
Max. stat pressure	450	450	Pa	p _{sf, max}
Max. medium temperature	60	60	°C	T _{m, max}
Max. environment temperature	60	60	°C	T _{amb, max}
Min. environment temperature	-25	-25	°C	T _{amb, min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO B		ISO _{class}
Motor-protection		TEC		protect _{motor}
Protection class		IP54		IP _{motor}
Is pole-changeable		No		polexch
Type of power supply		AC 1~		pwr _{sup} _{motor}
Rated voltage	230		V	U _{rated, f1}
Rated current	1.4		A	I _{rated, f1}
Shaft power	168		W	P _{out, f1}
Speed	1250		1/min	n _{f1}
Efficiency	65.5		%	η _{m, f1}
Min. temperature	-25		°C	T _{motor, min}
UL-Certification motor		UL recognized		UL _{cert}




to the product detail page

DVA 355 ECP 31

139203

ruck


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

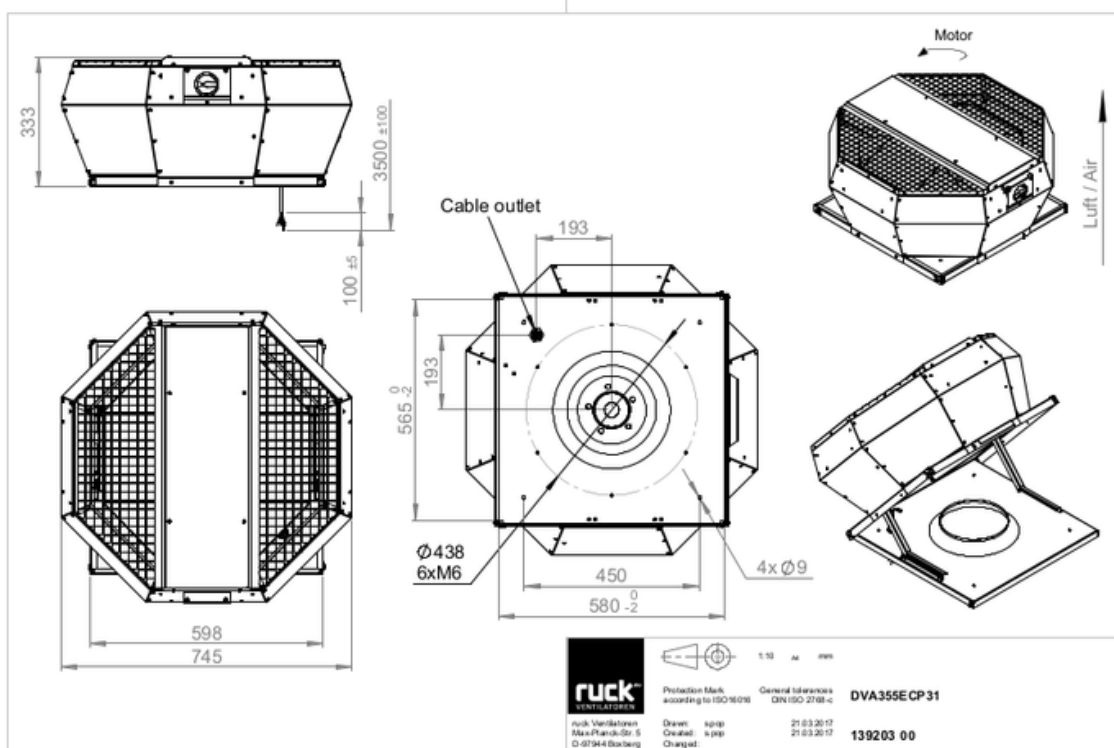

DVA 355 ECP 31

139203

ruck

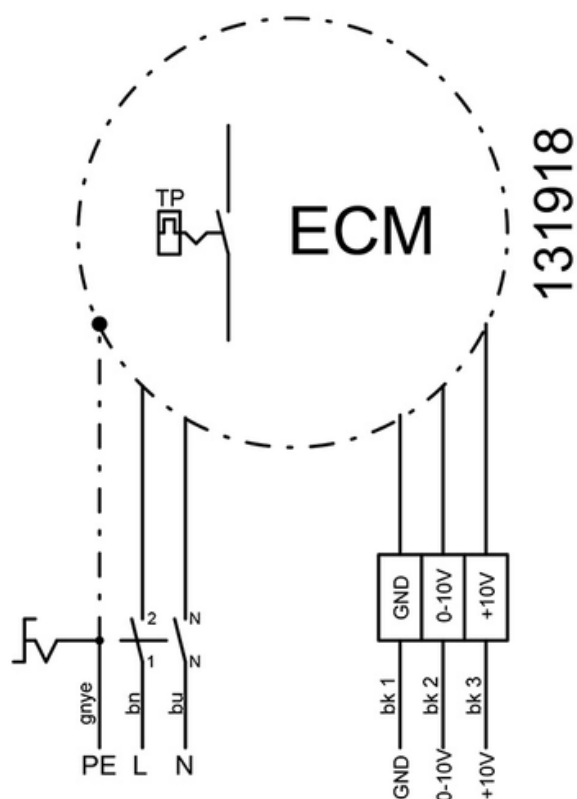


to the product detail page

DVA 355 ECP 31

139203


ruck

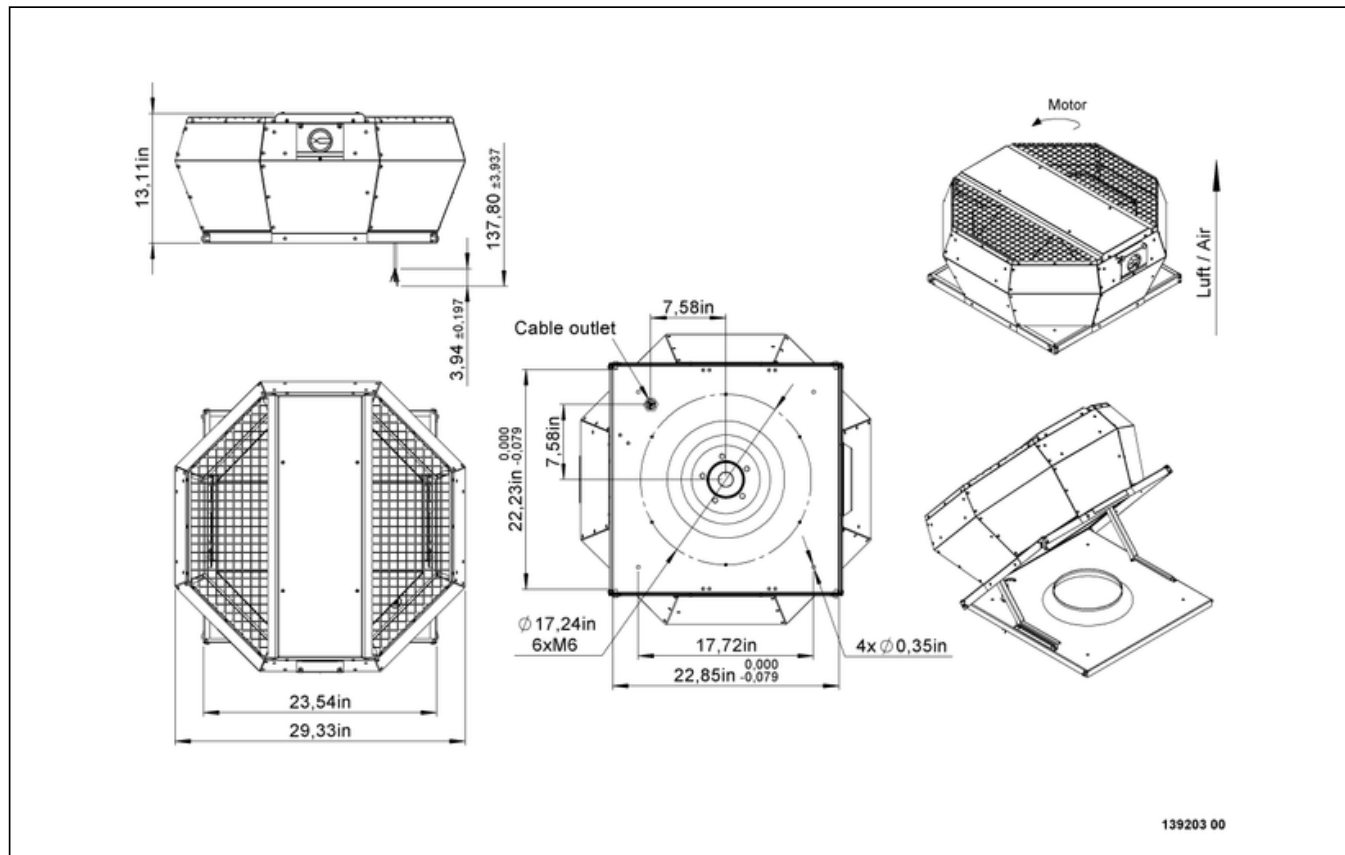

DVA 355 ECP 31

139203


ruck

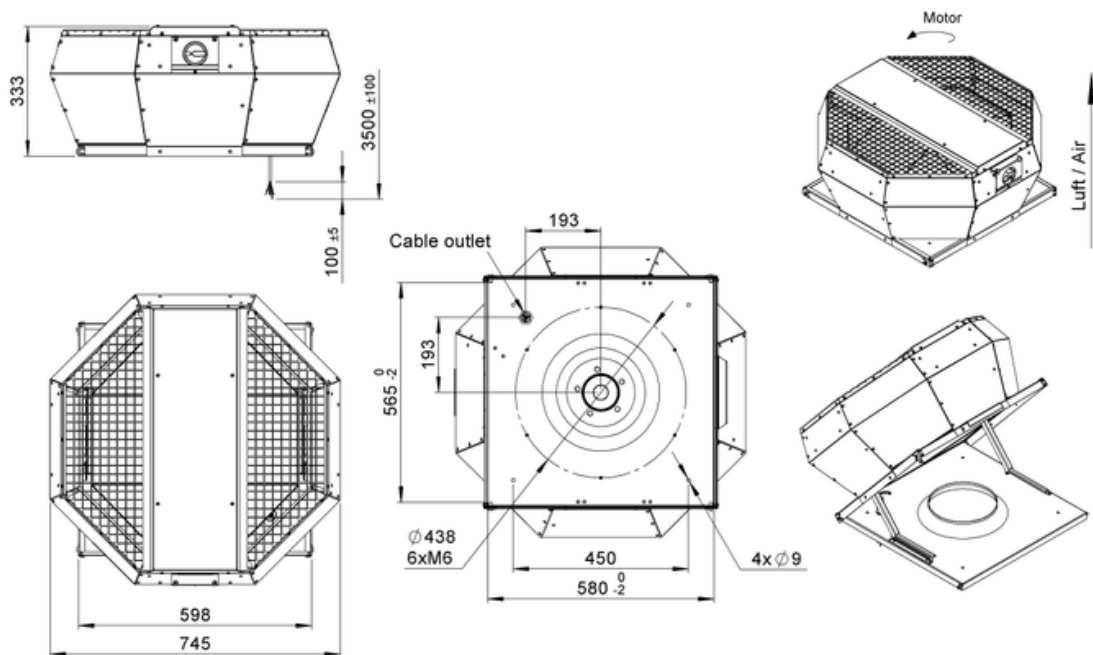

139203 00



to the product detail page

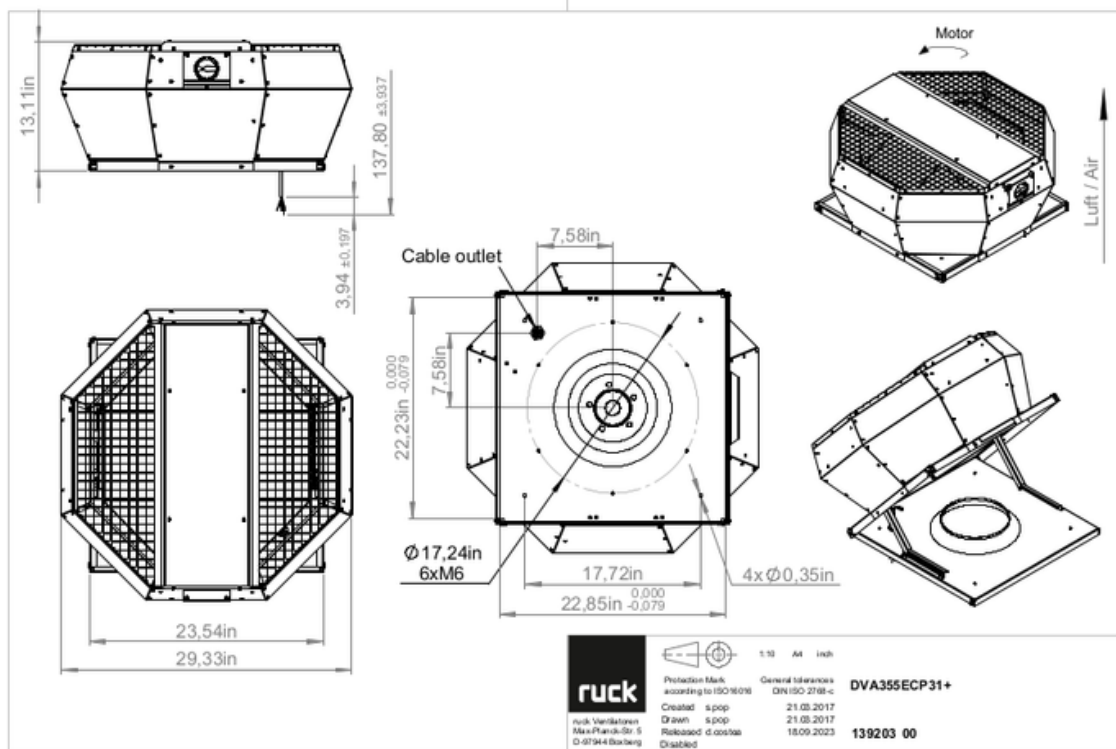

MECHANICAL ACCESSORIES

DVK 400 10 | 152897




- Automatic roof shutter
- Galvanized steel sheet

DAF 400 | 109826



- Roof inlet flange
- Galvanized steel sheet

DAS 400 | 109827




- Flexible roof inlet spigot
- Temperature resistant up to 75 °C

DSF 355-10 | 126160



- Flat roof socket
- Made of aluminum AlMg3
- Sound and heat insulation

DAP 355 | 133963



- Adapter plate for roof mounting of roof fans
- Galvanized steel sheet

DSS 355-10 | 126403



- Flat roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation

DSS 355-12 | 134395



- Sloped roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

DSF 355-12 | 133793



- Sloped roof socket
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°



to the product detail page

ELECTRICAL ACCESSORIES

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage+10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 50 | 153133



- Potentiometer with multifunction output
- 230 VAC $\pm$ 10 % / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable



to the product detail page