

DVA 560 ECP 31

139239


ruck

- Backward curved radial impeller
- Vertical discharge
- Housing made of aluminum AlMg3
- High efficiency EC motor, steplessly controllable
- Conveyed medium temperature up to 60 °C in continuous operation
- Integrated device switch



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

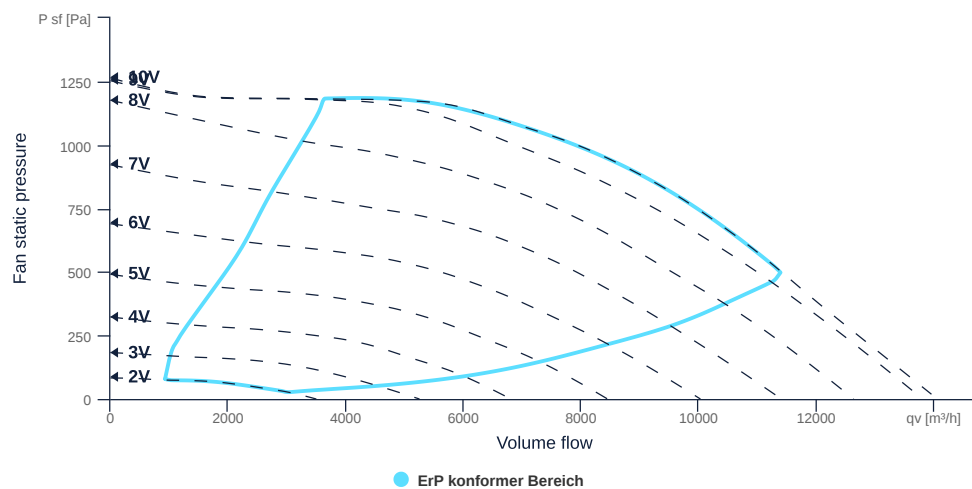

to the product detail page

DVA 560 ECP 31

139239

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN560		DN
Rated voltage (entire device)	400	V	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (casing)	IP44		IP _{casing}
Weight	44	kg	m
Nominal air flow rate, nominal point m³/h	7372.8	m³/h	q _{v,nom}
Nominal external pressure, static	744.5	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	2.05	m³/s	q _{v,nom}
Actual electrical input power, nominal point	2.28	kW	P _{e,nom}
Face velocity, nominal point	4.3	m/s	v _{nom}
Nominal external pressure, static	744.5	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	65.4	%	η _{es,SUP}
Enclosure sound level, nominal point	92	dB(A)	L _{WA2}
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	3406	3406	W	P _{ed, max}
Max. operating current (device)	5.23	5.23	A	I _{ed, max}
Max. speed	1790	1790	1/min	n _{max}
Max. stat. efficiency	61.6	61.6	%	η _{es}
Max. fan efficiency	62.6	62.6	%	η _e
Max. flowrate	14060	14060	m³/h	Q _{v, max}
Max. stat pressure	1260	1260	Pa	p _{sf, max}
Max. medium temperature	60	60	°C	T _{m, max}
Max. environment temperature	60	60	°C	T _{amb, max}
Min. environment temperature	-30	-30	°C	T _{amb, min}



to the product detail page

DVA 560 ECP 31

139239

ruck


MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Rated voltage	400		V	U _{rated, f1}
Rated current	5.4		A	I _{rated, f1}
Shaft power	3500		W	P _{out, f1}
Speed	1750		1/min	n _{f1}
Min. temperature	-40		°C	T _{motor, min}
UL-Certification motor		UL recognized		ULcert



to the product detail page


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

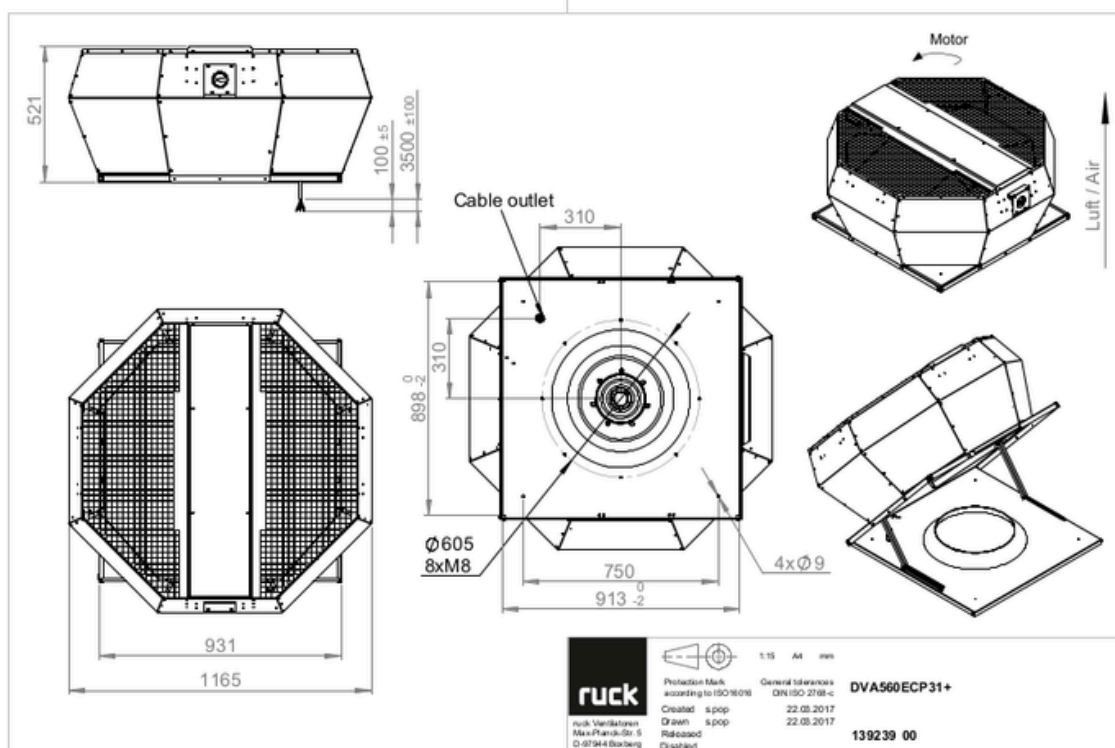

DVA 560 ECP 31

139239

ruck

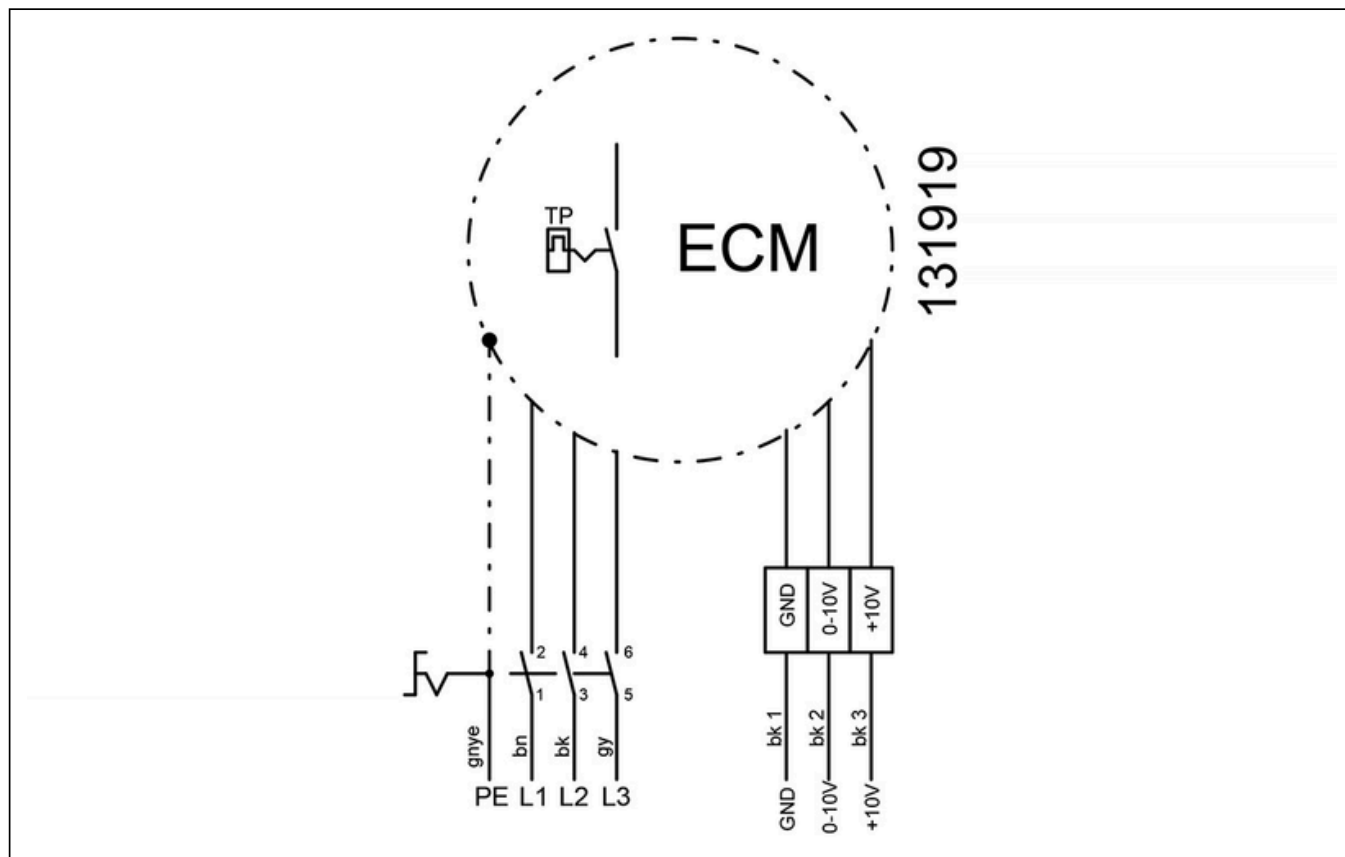


to the product detail page

DVA 560 ECP 31

139239

ruck

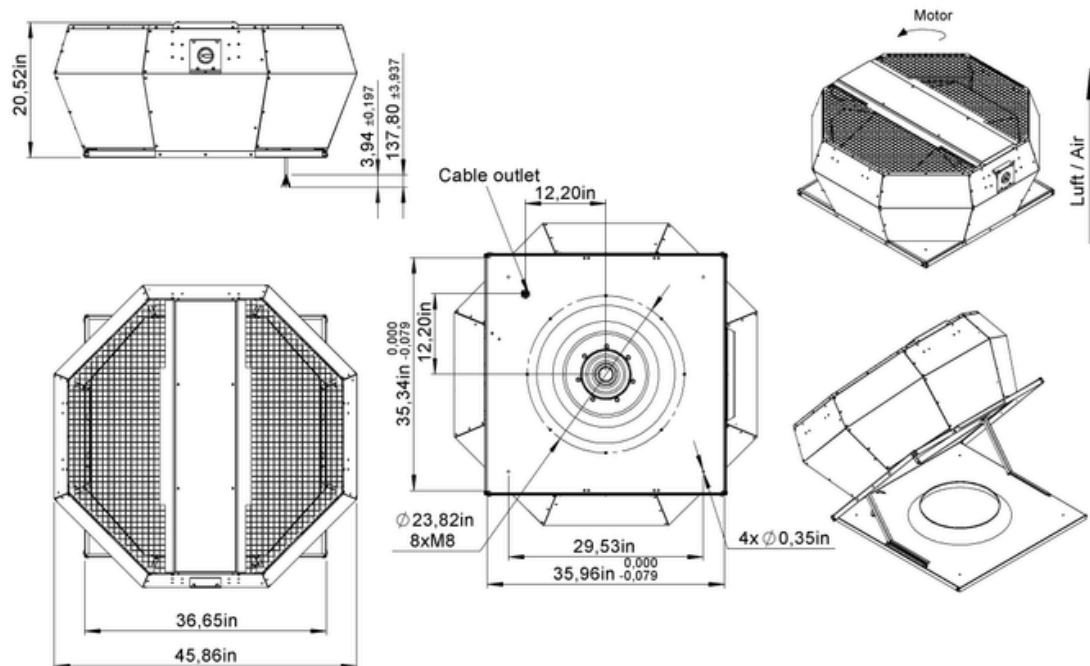

139239 00




to the product detail page

DVA 560 ECP 31

139239

ruck

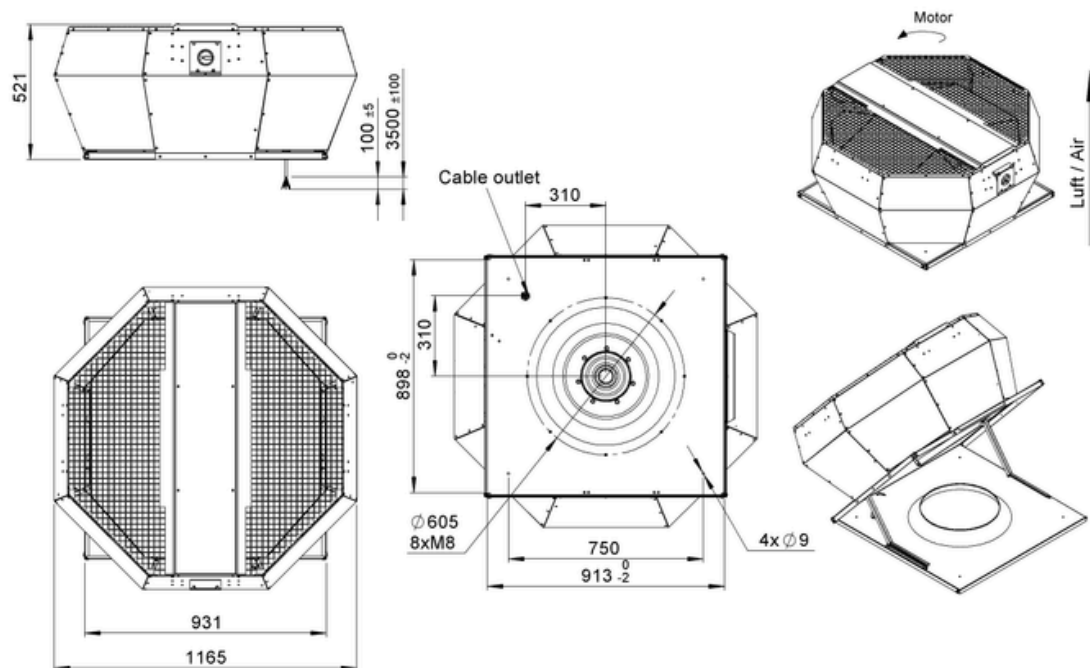


139239 00



to the product detail page


DVA 560 ECP 31

139239

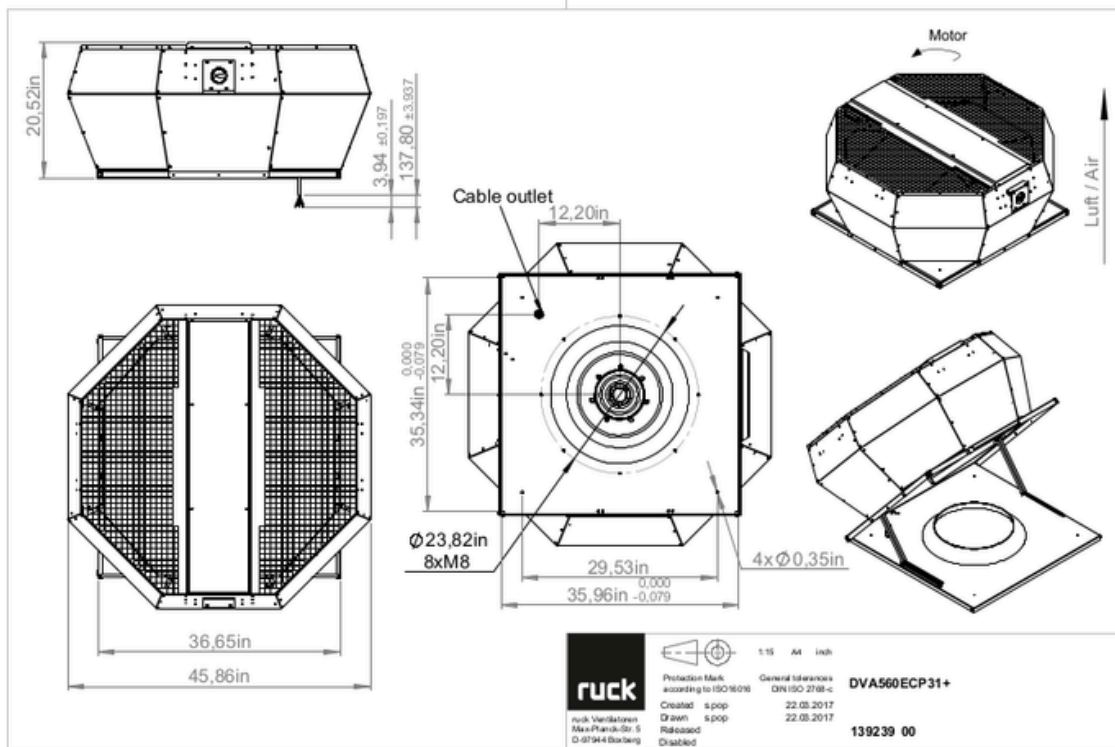

MECHANICAL ACCESSORIES

DAS 560 | 122287



- Flexible roof inlet spigot
- Temperature resistant up to 75 °C

DAF 560 | 122288



- Roof inlet flange
- Galvanized steel sheet

DSS 560-10 | 126471



- Flat roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation

DSS 560-12 | 134486



- Sloped roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

DSF 560-12 | 133892



- Sloped roof socket
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

DVK 560 10 | 152898



- Automatic roof shutter
- Galvanized steel sheet

DAP 560 | 133979



- Adapter plate for roof mounting of roof fans
- Galvanized steel sheet

DSF 560-10 | 126237



- Flat roof socket
- Made of aluminum AlMg3
- Sound and heat insulation



to the product detail page

ELECTRICAL ACCESSORIES

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage +10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 50 | 153133



- Potentiometer with multifunction output
- 230 VAC $\pm$ 10 % / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable



to the product detail page