

DVA 630 ECP 41

157287


ruck

- Backward curved radial impeller
- Vertical discharge
- Housing made of aluminum AlMg3
- High efficiency EC motor, steplessly controllable
- Conveyed medium temperature up to 50 °C in continuous operation
- Integrated device switch



MAP

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

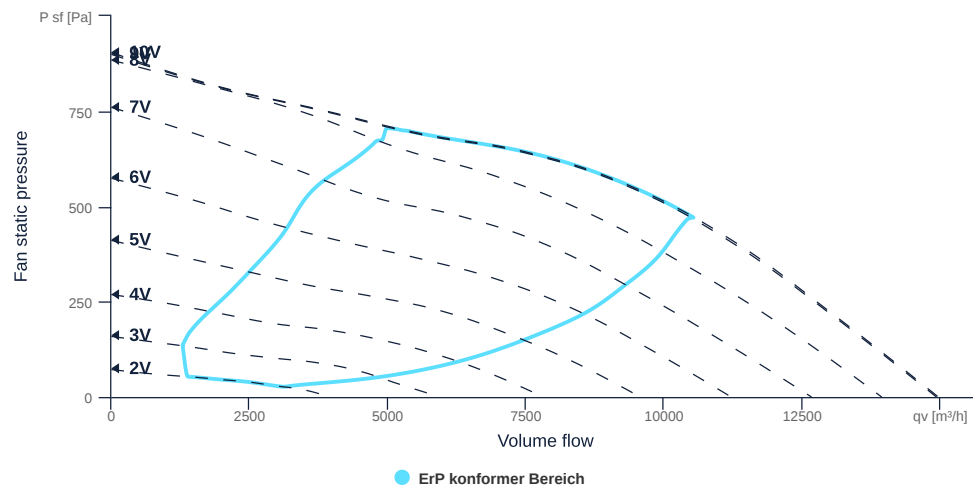

to the product detail page

DVA 630 ECP 41

157287

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Duct size	-		WxH _{duct}
Pipe connection size (DN)	DN560		DN
Rated voltage (entire device)	400	V	U _{rated}
Phases (entire device)	3~		phase
Electrical protection (entire device)	6 A		fuse
Housing material	Aluminium		mat _{casing}
Impeller material	Plastic		mat _{impeller}
IP-protection class (casing)	IP44		IP _{casing}
IP-protection class (entire device)	IPX4		IP _{compl}
Weight	55	kg	m
Nominal air flow rate, nominal point m³/h	8204.4	m³/h	q _{v,nom}
Nominal external pressure, static	615.9	Pa	p _{s,nom}
Fan type	Radial		Fan _{type}
Category / Installation situation	A		cat

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	2.28	m³/s	q _{v,nom}
Actual electrical input power, nominal point	2.49	kW	P _{e,nom}
Face velocity, nominal point	4.4	m/s	v _{nom}
Nominal external pressure, static	615.9	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	66.5	%	η _{es,SUP}
Enclosure sound level, nominal point	87	dB(A)	L _{WA2}
Rating	Product is compliant 2018		



DVA 630 ECP 41

157287

ruck

MAXIMAL DATA


Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Max. power consumption (device)	2707	2707	W	P _{ed, max}
Max. operating current (device)	4.13	4.13	A	I _{ed, max}
Max. speed	1300	1300	1/min	n _{max}
Max. stat. efficiency	53.4	53.4	%	η _{es}
Max. fan efficiency	54.5	54.5	%	η _e
Max. flowrate	14960	14960	m³/h	Q _{v, max}
Max. stat pressure	900	900	Pa	p _{sf, max}
Max. medium temperature	50	50	°C	T _{m, max}
Max. environment temperature	50	50	°C	T _{amb, max}
Min. environment temperature	-40	-40	°C	T _{amb, min}

MOTOR DATA

Name	Value		Unit	Formula symbol
	50 Hz	60 Hz		
Rated frequency (device)		50		f
Motor type		EC		phase
Control type		stepless-controlled		ctrltype
Installation type		ORM (Out)		install
Rotation direction		right		rotation
Isolation class		ISO F		ISOclass
Motor-protection		TEC		protectmotor
Protection class		IP55		IPmotor
Is pole-changeable		No		polexch
Type of power supply		AC 3~		pwrsupmotor
Rated voltage	400		V	U _{rated, f1}
Rated current	4.1		A	I _{rated, f1}
Shaft power	2650		W	P _{out, f1}
Speed	1270		1/min	n _{f1}
Min. temperature	-40		°C	T _{motor, min}
UL-Certification motor		UL recognized		ULcert




CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

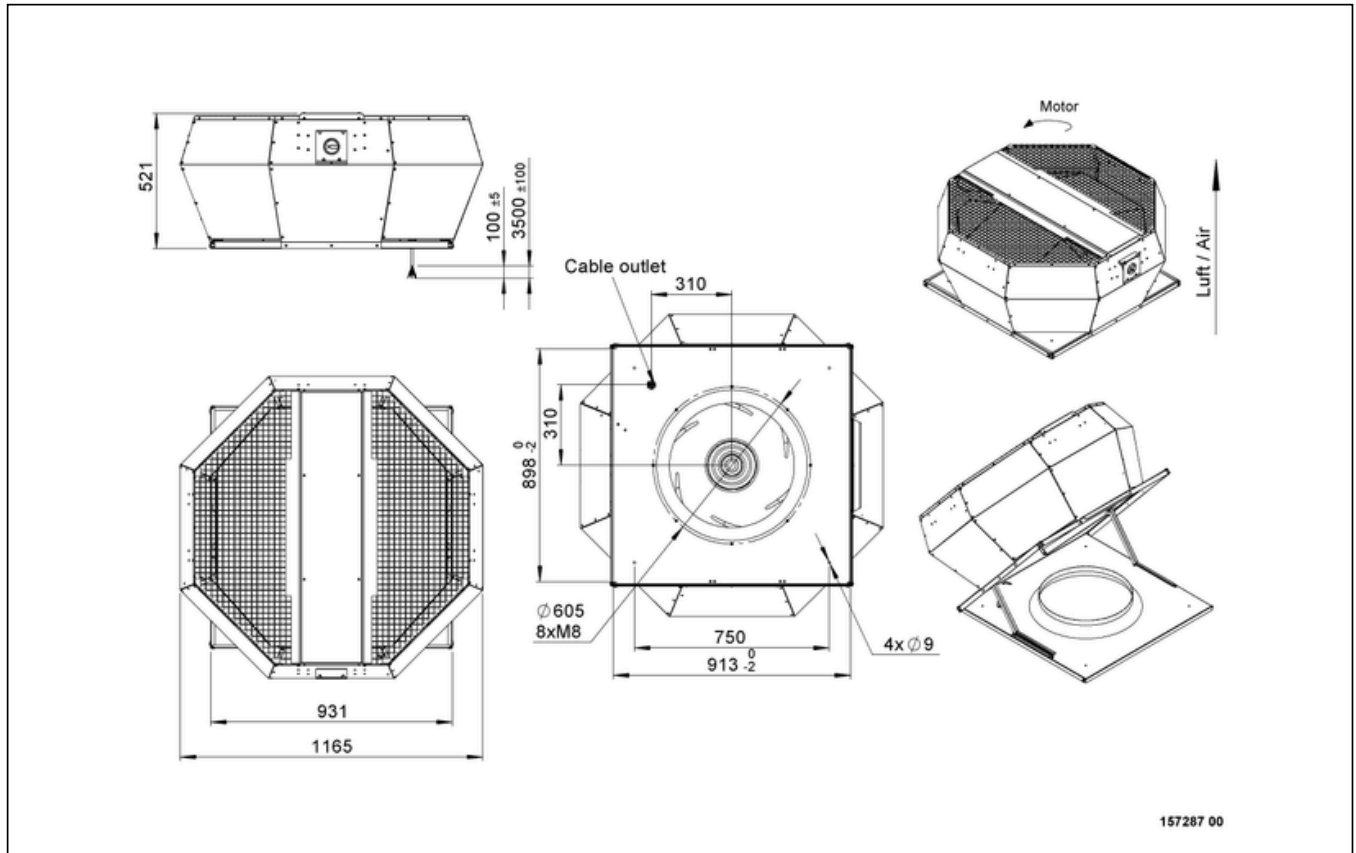

DVA 630 ECP 41

157287

ruck

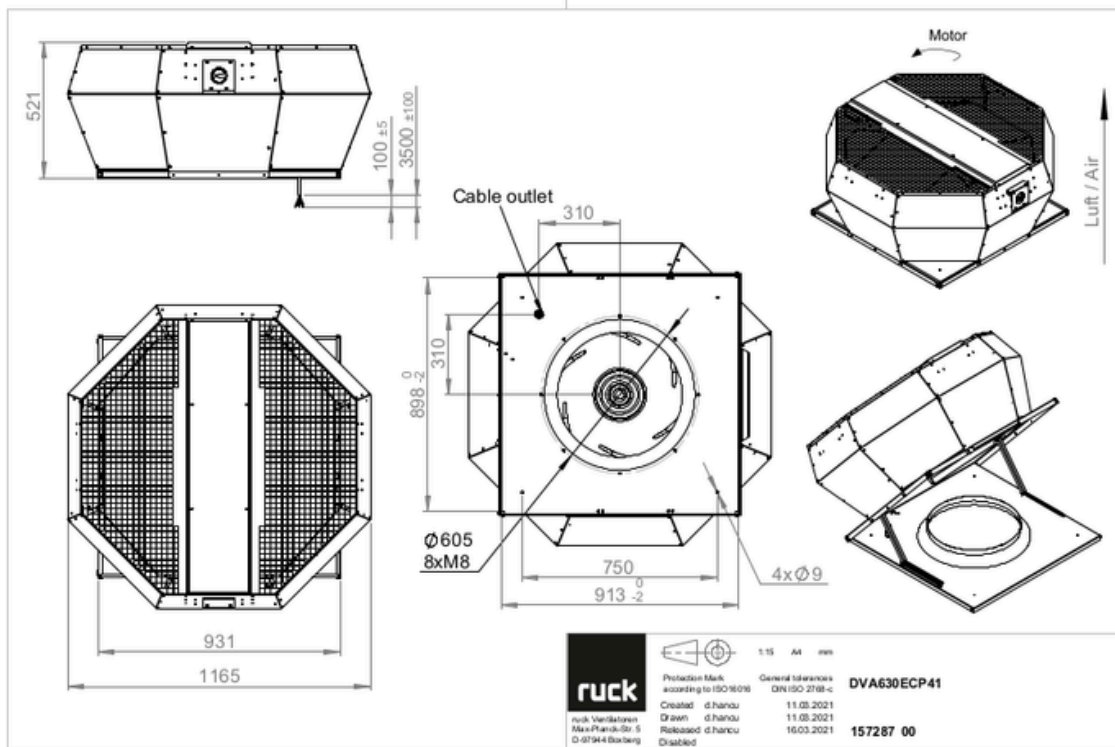


to the product detail page

DVA 630 ECP 41

157287

ruck

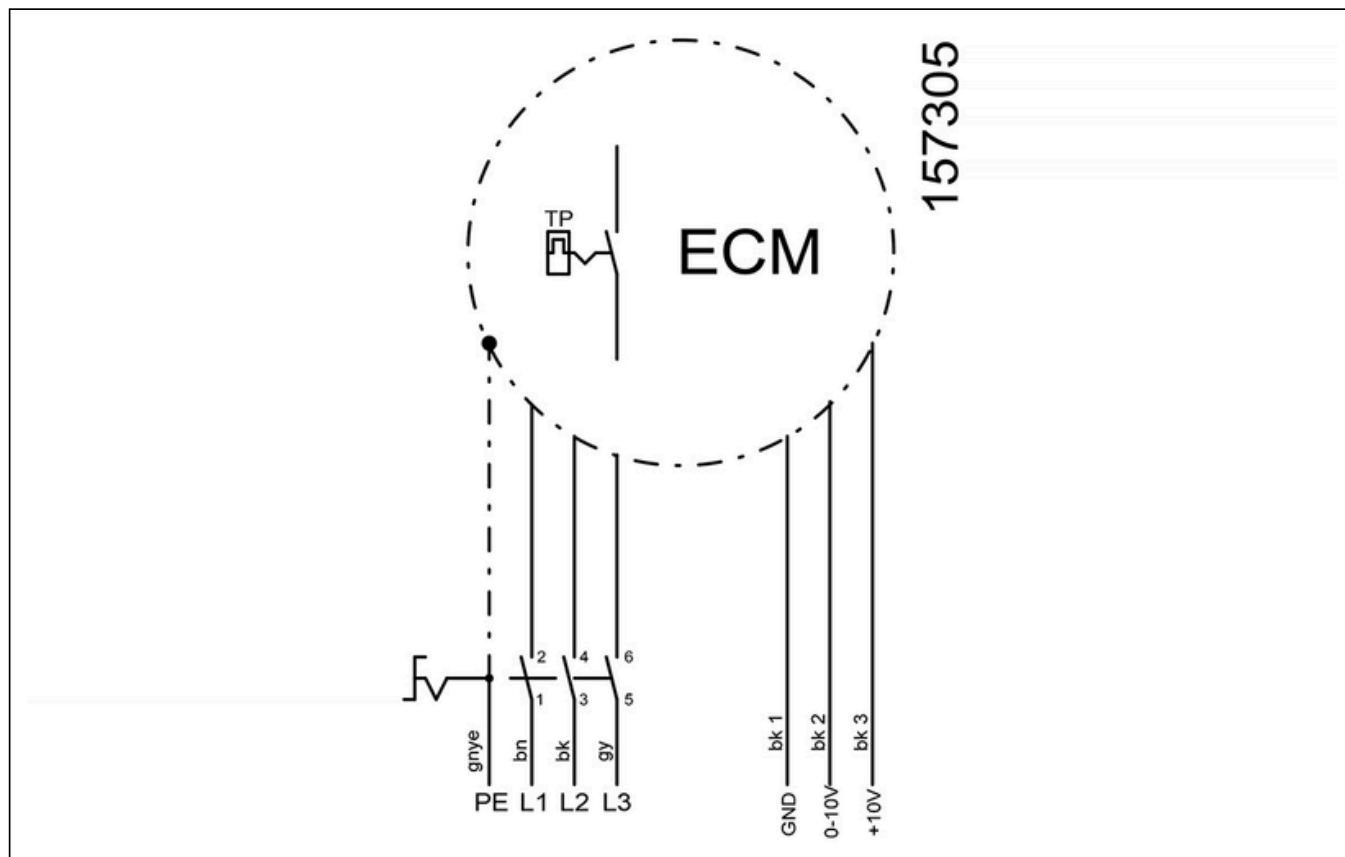



to the product detail page

DVA 630 ECP 41

157287

ruck

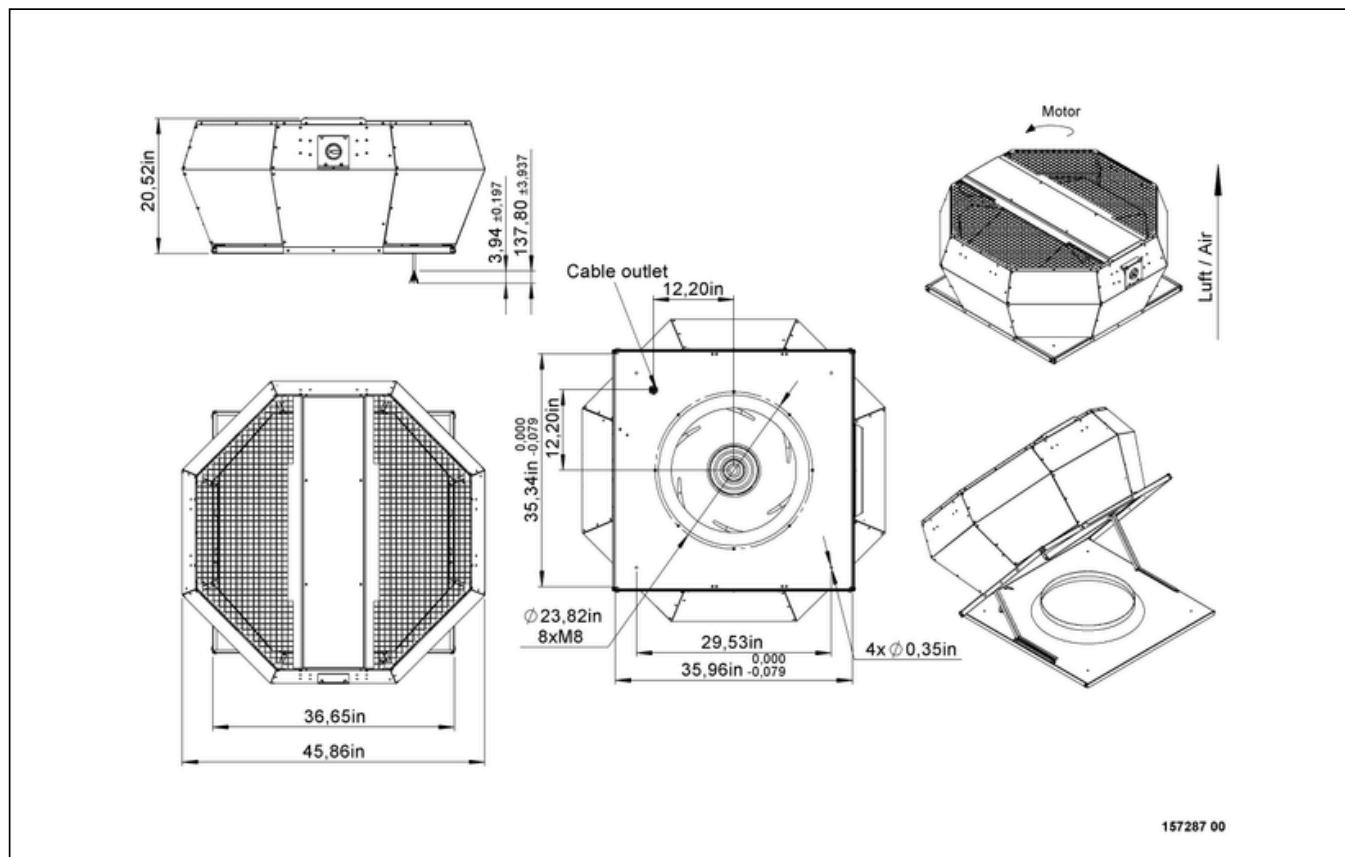

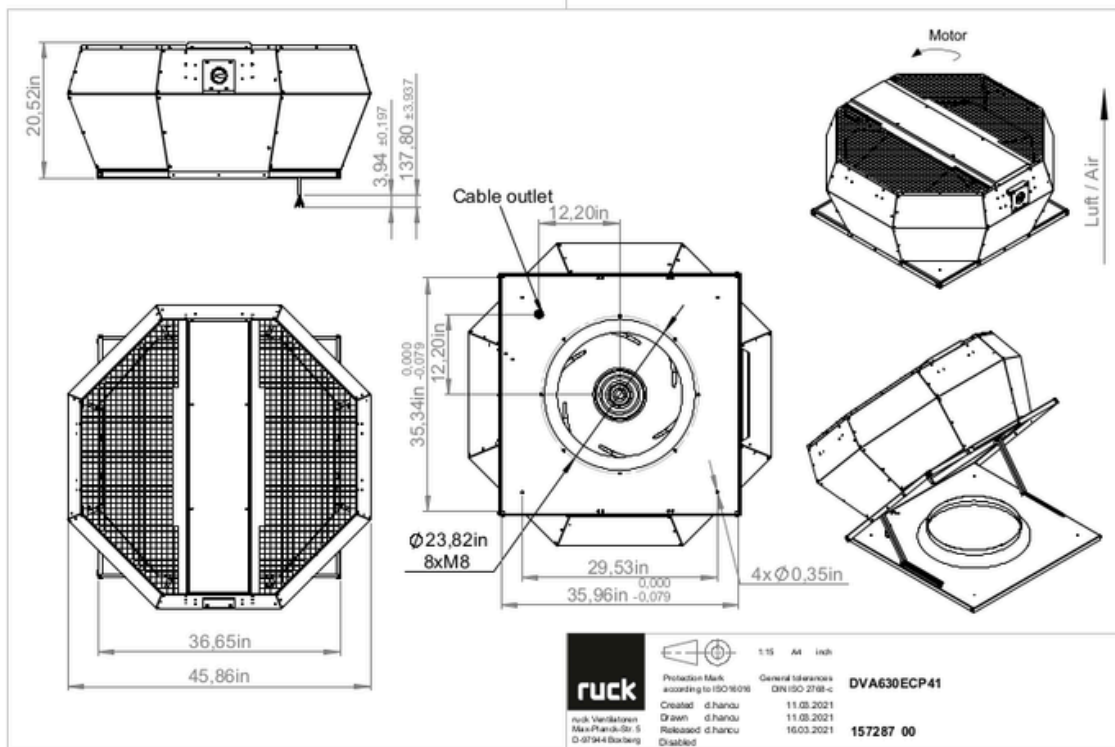

MECHANICAL ACCESSORIES

DAS 560 | 122287



- Flexible roof inlet spigot
- Temperature resistant up to 75 °C

DAF 560 | 122288



- Roof inlet flange
- Galvanized steel sheet

DSS 560-10 | 126471



- Flat roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation

DSS 560-12 | 134486



- Sloped roof socket silencer
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

DSF 560-12 | 133892



- Sloped roof socket
- Made of aluminum AlMg3
- Sound and heat insulation
- For roof slope 3°

DVK 560 10 | 152898



- Automatic roof shutter
- Galvanized steel sheet

DAP 560 | 133979



- Adapter plate for roof mounting of roof fans
- Galvanized steel sheet

DSF 560-10 | 126237



- Flat roof socket
- Made of aluminum AlMg3
- Sound and heat insulation



to the product detail page

ELECTRICAL ACCESSORIES

MTP 20 | 128146



- Potentiometer 10 k Ω
- Switching contact 1A/250V AC - 2,5A/12V DC
- Max. ambient temperature 50 °C
- VDE

MTP 30 | 143289



- Stepped potentiometer 10 k Ω
- Step 1 + 2 settable 10 % - 100 % Vdc
- Step 3 100 % Vdc
- Supply voltage+10 Vdc

MTP 40 | 147359



- Potentiometer 10 k Ω
- Connection in terminal box
- Max. ambient temperature 50 °C
- PU: 20 pieces

SEN AIR | 148641



- Airflow and temperature transducer
- Measuring range temperature 0...+50 °C
- With adjustable switching threshold (air speed)
- Measuring range air velocity up to 20 m/s

CON P1000 | 115259



- Constant pressure control
- Actual value display possible via optional control unit
- Output 0-10 V DC + FC enable + setpoint reached
- Pressure setting by means of decade switch

MTP 50 | 153133



- Potentiometer with multifunction output
- 230 VAC $\pm$ 10 % / 50-60 Hz
- Selectable output: 1-10 VDC / 2-20 mA / 10-100 % PWM
- Min. and max. output value adjustable



to the product detail page