


SL 12040 E1 10 10

135974


ruck

- Flat extract air unit for ceiling mounting
- Frameless, double wall housing made of galvanized steel sheet, insulated
- EC diagonal fans, steplessly controllable
- Without controls, speed controllable
- Multileaf damper (without actuator)

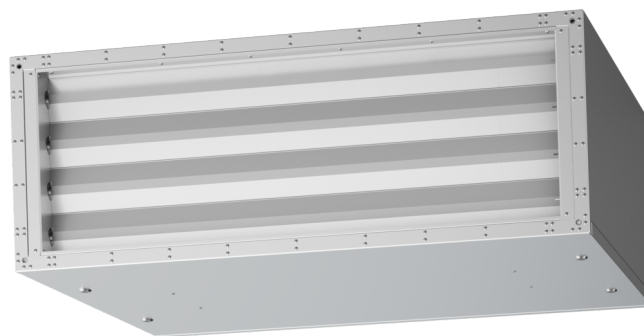

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

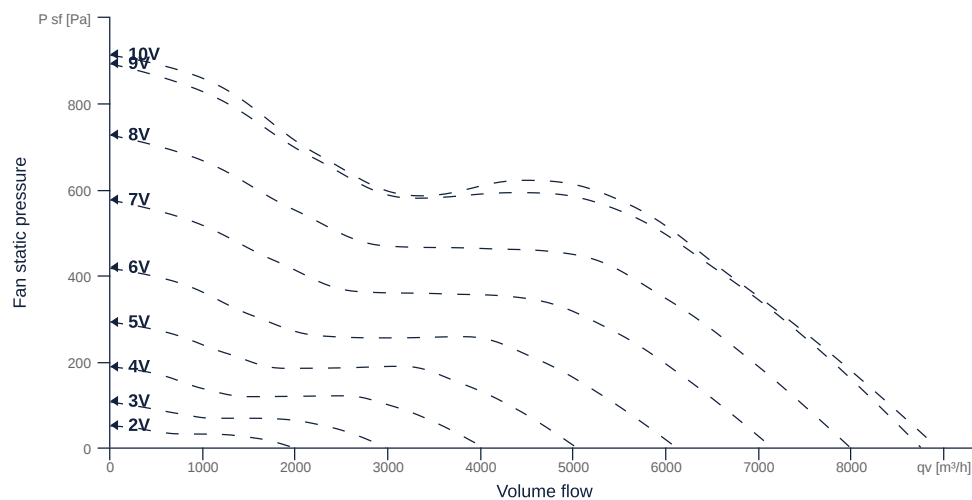

to the product detail page

SL 12040 E1 10 10

135974

ruck

GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Rated voltage (entire device)	230	V	U_{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	10 A		fuse
Weight	71	kg	m
Nominal air flow rate, nominal point m³/h	6861.6	m³/h	$q_{v,nom}$
Nominal external pressure, static	357	Pa	$p_{s,nom}$
Connection side supply air	-		L/R
Type of the ventilation-unit	UVU - without air treatment		AHU _{type}
Type of the heater	No		H _{type}
Type of cooler	No		C _{type}
Outdoor installation	No		outdoor
Speed control	variable speed control		VSD _{type}

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Nominal air flow rate, nominal point m³/s	1.91	m³/s	$q_{v,nom}$
Actual electrical input power, nominal point	1.46	kW	$P_{e,nom}$
Face velocity, nominal point	3.97	m/s	v_{nom}
Nominal external pressure, static	357	Pa	$p_{s,nom}$
supply air fan static efficiency, nominal point	61.1	%	$\eta_{es,SUP}$
Highest external air leakage rate	1.27	%	
Enclosure sound level, nominal point	67	dB(A)	L _{WA2}
Rating	Product is compliant 2018		

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	1462	W	$P_{ed,max}$
Max. operating current (device)	6.72	A	$I_{ed,max}$
Max. speed	3000	1/min	n_{max}
Max. stat. efficiency	57	%	η_{es}
Max. fan efficiency	60.4	%	η_e
Max. flowrate	8925	m³/h	$q_{v,max}$
Max. stat pressure	910	Pa	$p_{sf,max}$
Max. medium temperature	40	°C	T_m,max
Max. environment temperature	40	°C	$T_{amb,max}$
Min. environment temperature	-25	°C	$T_{amb,min}$



to the product detail page

SL 12040 E1 10 10

135974



MOTOR DATA

Name	Value	Unit	Formula symbol
Rated frequency (device)	50		f
Is pole-changeable	No		polexch




to the product detail page

SL 12040 E1 10 10

135974

ruck


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

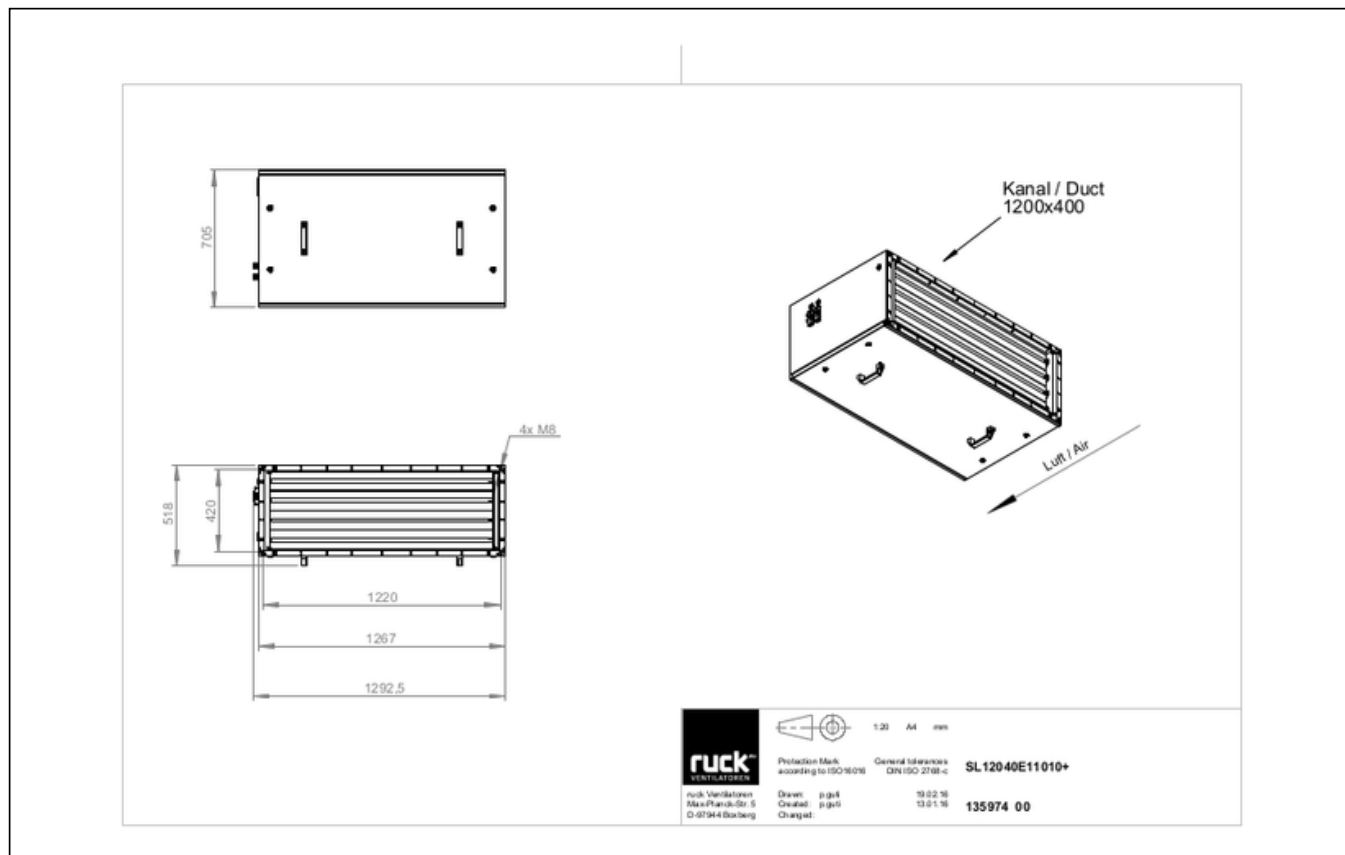

SL 12040 E1 10 10

135974

ruck



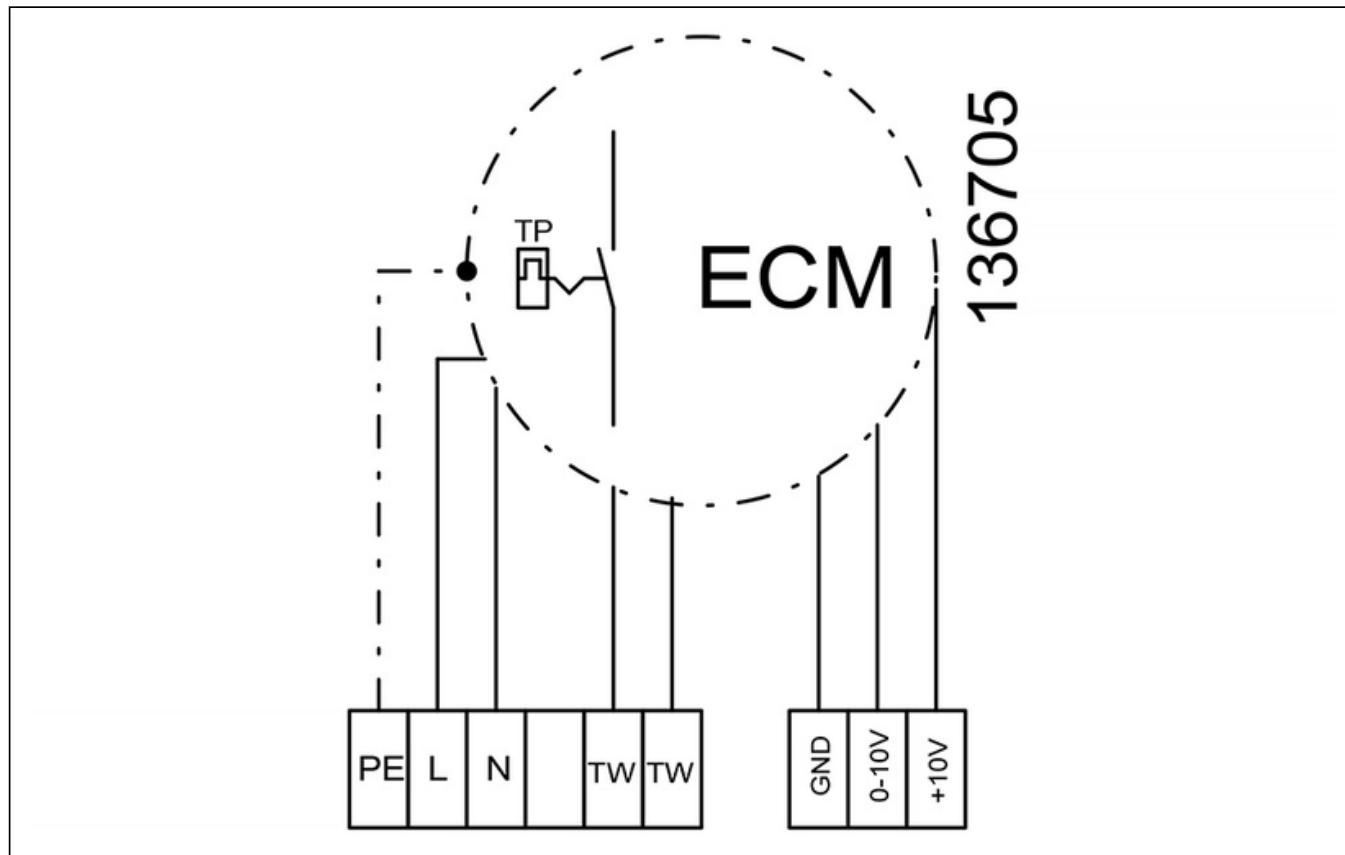


to the product detail page

SL 12040 E1 10 10

135974

ruck

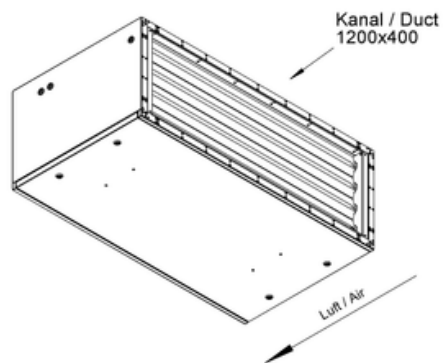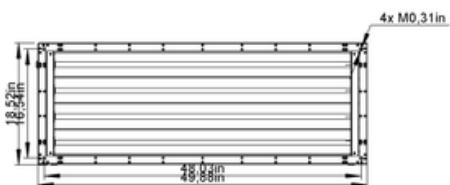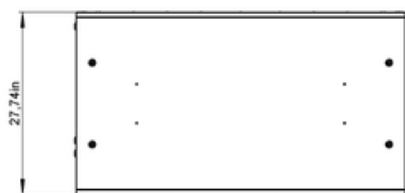

135974 00




to the product detail page

SL 12040 E1 10 10

135974

ruck

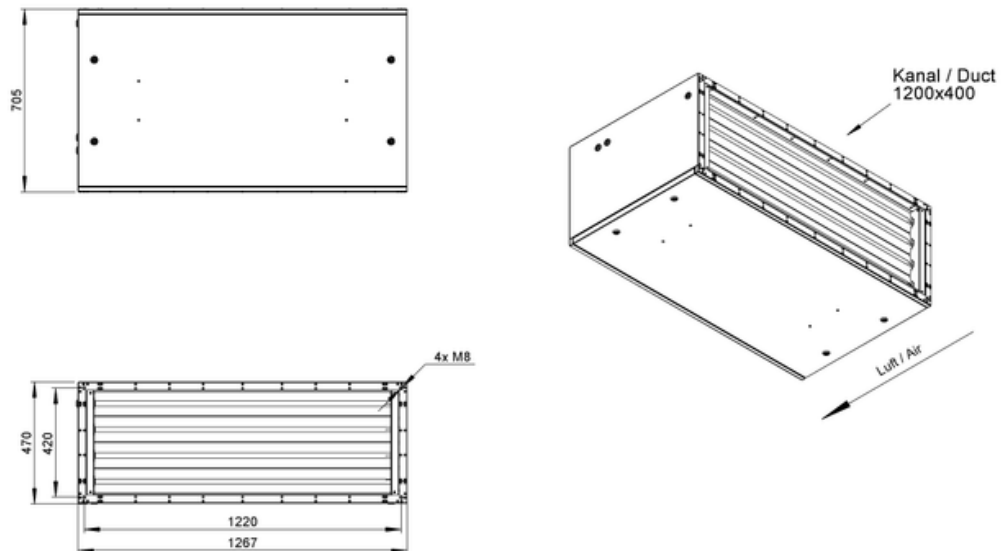

135974 00




to the product detail page

SL 12040 E1 10 10

135974

ruck

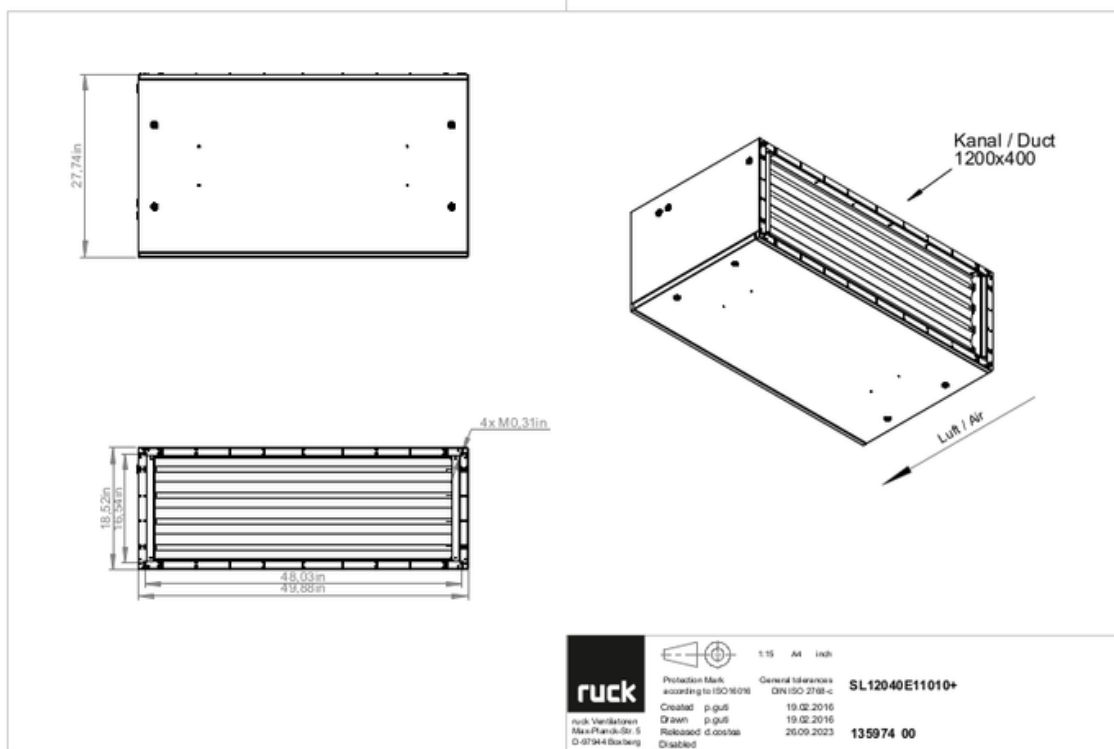

MECHANICAL ACCESSORIES

VS 12040 | 127080



- Duct connector, flexible
- Standard profile flange P20
- Galvanized steel sheet, plastic band (PVC)
- Temperature resistant up to 70 °C



to the product detail page

ELECTRICAL ACCESSORIES

GS 01 | 102787



- Isolator switch
- $U_{max} = 400 \text{ V}$, 50/60 Hz
- Switching capacity $400 \text{ V } 3\sim = 7,5 \text{ kW}$
- $I_{max} = 25 \text{ A}$

103590 | 103590



- Damper actuator
- Air damper size up to approx. 1 m^2
- 3 point control
- $U(N) = 24 \text{ V AC/DC}$

103933 | 103933



- Damper actuator
- Air damper size up to approx. 1 m^2
- 3 point control
- $U(N) = 230 \text{ V AC}$

MTP 20 | 128146



- Potentiometer $10 \text{ k}\Omega$
- Switching contact $1\text{A}/250\text{V AC} - 2,5\text{A}/12\text{V DC}$
- Max. ambient temperature 50°C
- VDE

MTP 30 | 143289



- Stepped potentiometer $10 \text{ k}\Omega$
- Step 1 + 2 settable $10\% - 100\% \text{ Vdc}$
- Step 3 $100\% \text{ Vdc}$
- Supply voltage $+10 \text{ Vdc}$



to the product detail page