


SL 9040 E2J 10 10

136150


ruck

- Flat supply air unit for ceiling mounting
- Frameless, double wall housing made of galvanized steel sheet, insulated
- EC diagonal fans, integrated controls
- Warm water heating, without cooling
- Panel Filter M5
- Actuator multileaf damper OPEN/CLOSED

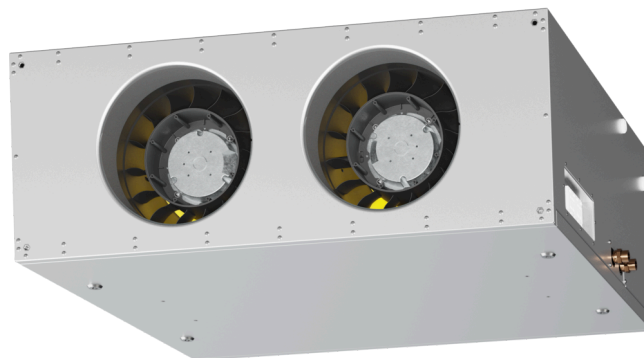

FAN CURVES

Name	Value	Unit
Volume flow	0	m³/h
Pressure	0	Pa

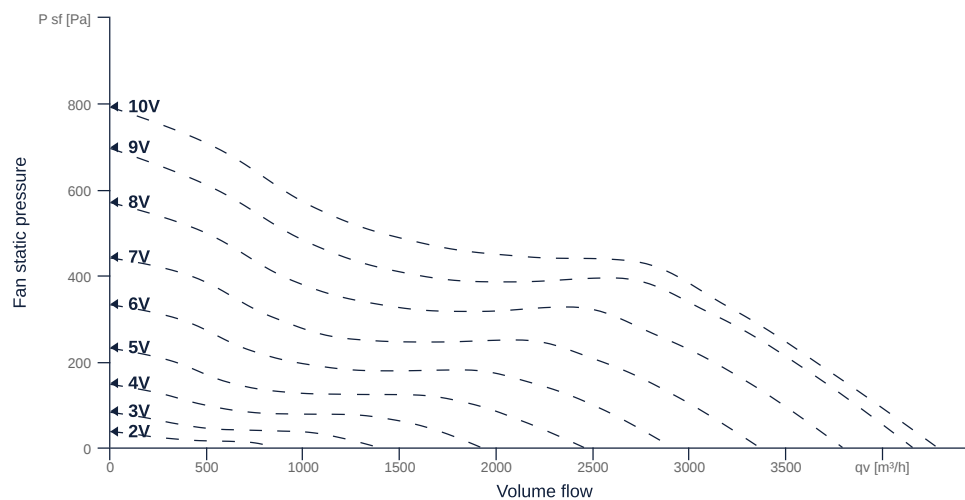

to the product detail page

SL 9040 E2J 10 10

136150



GENERAL DATA

Name	Value	Unit	Formula symbol
Labeling	CE, UKCA		
Rated voltage (entire device)	230	V	U _{rated}
Phases (entire device)	1~		phase
Electrical protection (entire device)	6 A		fuse
IP-protection class (entire device)	IPX4		IP _{compl}
Weight	78.5	kg	m
Nominal air flow rate, nominal point m³/h	3679.2	m³/h	Q _{v,nom}
Nominal external pressure, static	187	Pa	p _{s,nom}
Connection side supply air	-		L/R
Type of the ventilation-unit	UVU - with air treatment		AHU _{type}
Type of the heater	Hot water		H _{type}
Type of cooler	No		C _{type}
Outdoor installation	No		outdoor
Speed control	variable speed control		VSD _{type}

ERP DATA (LOT 6)

Name	Value	Unit	Formula symbol
Energy performance supply air filter	E		
Nominal air flow rate, nominal point m³/s	1.02	m³/s	Q _{v,nom}
Actual electrical input power, nominal point	0.73	kW	P _{e,nom}
Internal specific fan power, nominal point	146	Ws/m³	SFP _{int}
Face velocity, nominal point	8.1	m/s	v _{nom}
Nominal external pressure, static	187	Pa	p _{s,nom}
supply air fan static efficiency, nominal point	61.8	%	η _{es,SUP}
Highest external air leakage rate	0.63	%	
Enclosure sound level, nominal point	60	dB(A)	LWA2
Rating	Product is compliant 2018		



to the product detail page

SL 9040 E2J 10 10

136150

ruck

MAXIMAL DATA

Name	Value	Unit	Formula symbol
Max. power consumption (device)	738	W	$P_{ed, max}$
Max. operating current (device)	3.39	A	$I_{ed, max}$
Max. speed	2625	1/min	n_{max}
Max. stat. efficiency	41.4	%	η_{es}
Max. fan efficiency	43.5	%	η_e
Max. flowrate	4280	m ³ /h	$q_{v, max}$
Max. stat pressure	790	Pa	$p_{sf, max}$
Max. medium temperature	40	°C	T_m, max
Max. environment temperature	40	°C	$T_{amb, max}$
Min. environment temperature	-25	°C	$T_{amb, min}$

MOTOR DATA

Name	Value	Unit	Formula symbol
Rated frequency (device)	50		f
Motor type	EC		phase
Control type	stepless-controlled		ctrltype
Installation type	ORM (Out)		install
Rotation direction	right		rotation
Isolation class	ISO F		ISOclass
Motor-protection	TEC		protectmotor
Protection class	IP20		IPmotor
Is pole-changeable	No		polexch
Type of power supply	AC 1~		pwrsupmotor
Rated voltage	230	V	$U_{rated, f1}$
Rated current	3.3	A	$I_{rated, f1}$
Shaft power	600	W	$P_{out, f1}$
Speed	2300	1/min	n_{f1}
UL-Certification motor	UL recognized		ULcert




to the product detail page

SL 9040 E2J 10 10

136150

ruck


CIRCUIT DIAGRAMS / DIMENSIONAL DRAWINGS

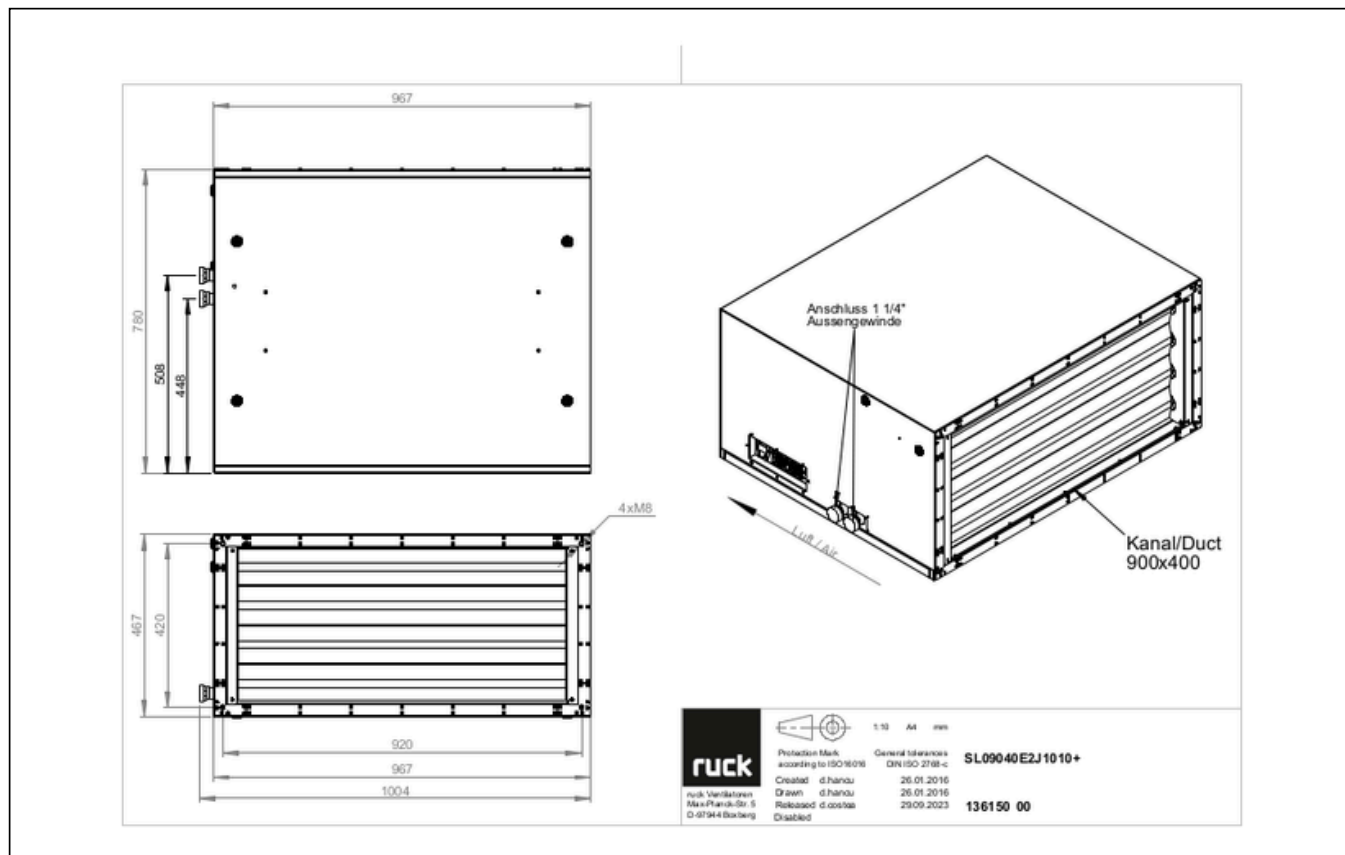

SL 9040 E2J 10 10

136150

ruck


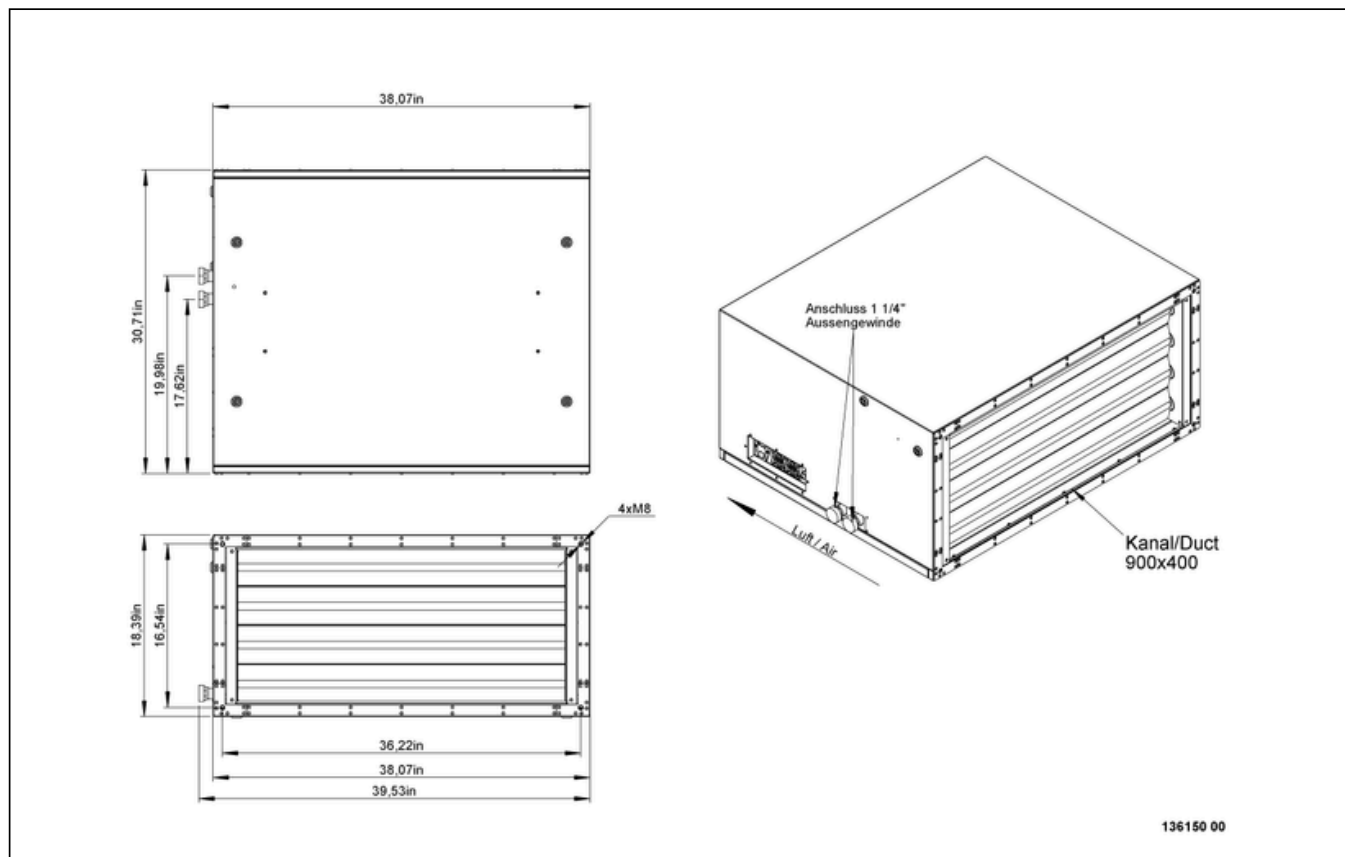


to the product detail page

SL 9040 E2J 10 10

136150

ruck

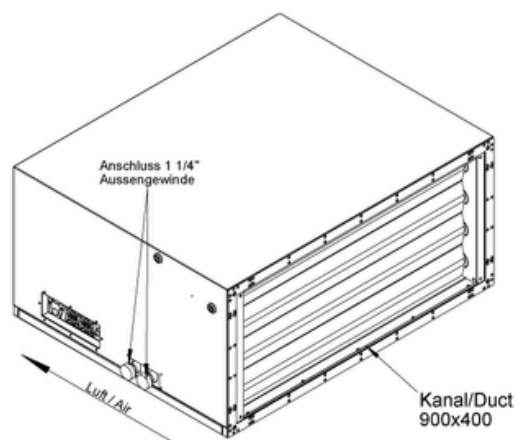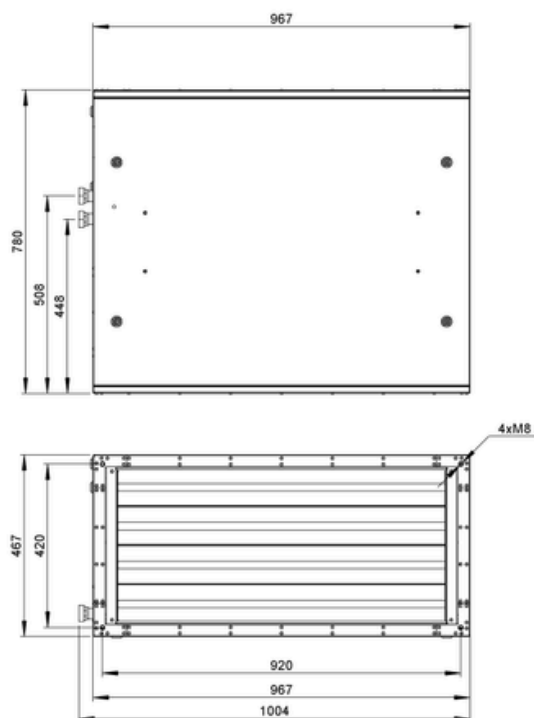

136150 00




to the product detail page

SL 9040 E2J 10 10

136150

ruck

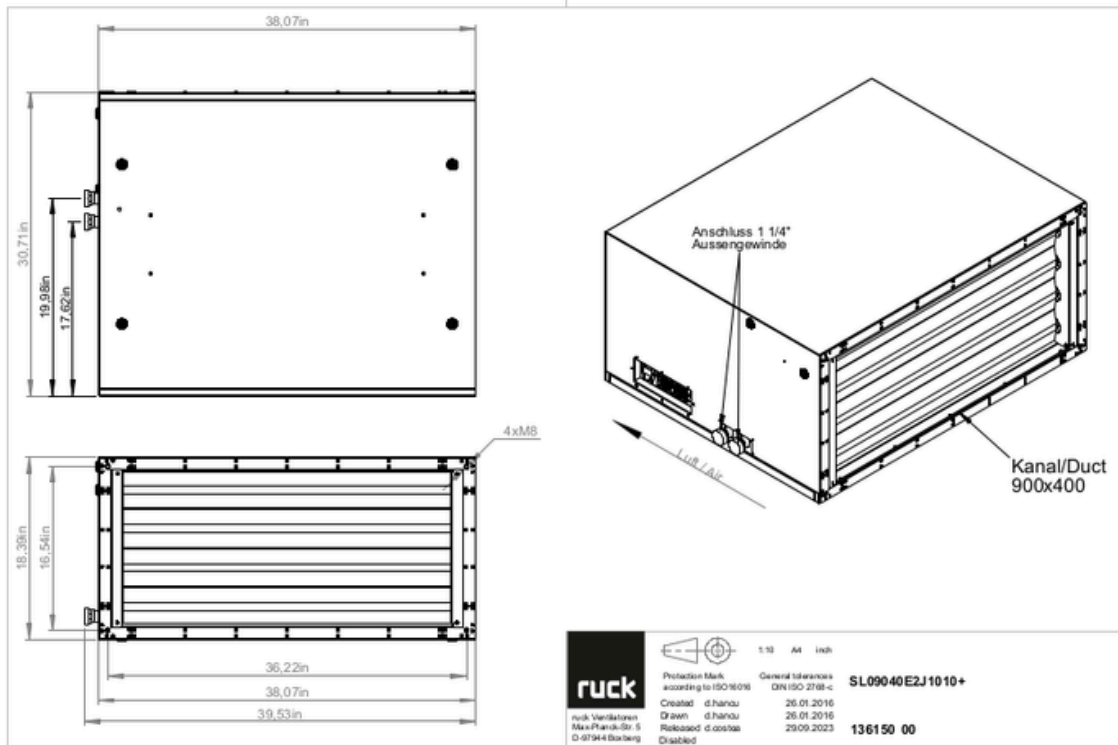

MECHANICAL ACCESSORIES

VS 9040 | 118649



- Duct connector, flexible
- Standard profile flange P20
- Galvanized steel sheet, plastic band (PVC)
- Temperature resistant up to 70 °C

LFP 22 ISO ePM10 50% | 168745



- Air filter panel
- ISO ePM10 50%
- 892x387x96 mm

LFP 22 ISO ePM1 55% | 168747



- Air filter panel
- ISO ePM1 55%
- 892x387x96 mm



to the product detail page

ELECTRICAL ACCESSORIES

STK 03 | 112936



- 3-way ball-valve with actuator 230 V
- With actuator: Control 3-punct or ON/OFF
- Connections internal thread 1"
- Temperature range 0 °C...+50 °C

EHM 6030 R09 01 | 121427



- Electric heating module 60/30, 9 kW
- Steady temperature control
- Automatic device detection
- Connection side in supply air direction right

EHM 6030 L09 01 | 121428



- Electric heating module 60/30, 9 kW
- Steady temperature control
- Automatic device detection
- Connection side in supply air direction left

EHM 6030 R18 01 | 121429



- Electric heating module 60/30, 18 kW
- Steady temperature control
- Automatic device detection
- Connection side in supply air direction right

EHM 6030 L18 01 | 121430



- Electric heating module 60/30, 18 kW
- Steady temperature control
- Automatic device detection
- Connection side in supply air direction left

EHM 6030 R27 01 | 121431



- Electric heating module 60/30, 27 kW
- Steady temperature control
- Automatic device detection
- Connection side in supply air direction right

EHM 6030 L27 01 | 121432



- Electric heating module 60/30, 27 kW
- Steady temperature control
- Automatic device detection
- Connection side in supply air direction left

SEN P1000 | 126080



- Differential pressure sensor
- P-control, PV-control
- P = 2 pcs. required, PV = 1 pcs. required

TEM 075V | 136272



- 5-step transformer
- 230 V ~, 50/60 Hz

TEM 035V | 136273



- 5-step transformer
- 230 V ~, 50/60 Hz

SEN RH | 148636



- Humidity sensor
- Humidity 0..100 % rH
- Output 2 x 0-10V
- 15..24Vdc, max 0,3 W

SEN RAUCH 02 | 148637



- Duct smoke sensor
- Contamination display in % and message at 70 %
- 1 Switching contact, 8 A, 250 V AC 1 nc, 8 A, 250 V AC
- Supply flow 1 - 20 m/s

SEN RAUCH 01 | 148638



- Duct smoke sensor
- Contamination display in % and message at 70 %

SEN TEMP | 148639



- Duct temperature sensor
- Measuring range -50...+150 °C
- NTC 5k
- Incl. mounting clip, mounting screws

SEN CO2 03 | 168178



- CO2 sensor for demand based volume flow control
- Supply voltage 24 V
- Output 0-10 V DC
- Protection class IP 20



to the product detail page