

# Zehnder ComfoAir Q 600

The Zehnder ComfoAir Q is the next generation of heat recovery ventilation units, with state of the art design and intelligent technology, regardless of whether you are working on a new build or an old building, with Zehnder comfortable ventilation you have an innovative, tried and tested complete system. It contains features such as its automatic modulating true summer by-pass, world class heat recovery efficiency and integrated humidity sensor to provide a comfortable, healthy and energy-efficient indoor climate.



CCRZ Radio Frequency



ComfoSense C67



ComfoSwitch C67



Zehnder ComfoControl App

## Key Features

- World class 96% efficiency.
- 100% full and filtered modulating summer bypass.
- Left or right hand configuration through software alone, no mechanical alteration required.
- Commissioning wizard for a quick and simple set-up process.
- Flow control to maintain commissioned flow rates.
- Adaptive comfort technology.
- Automatic passive temperature boost in summer.
- Humidity boost continuously monitors the humidity level within the home and looks for a man-made spike before boosting the unit, irrespective of distance or dilution.
- Tool free filter access.
- ISO ePM1 >55% (F7) filter option.
- App for installer and end user option.
- Wireless commissioning option.
- Remote access option.
- KNX compatibility option.
- 0-10V input option.
- Internal pre-heater option.
- Post heater control option.
- Enthalpy cube option.
- Passive House certified.

## SAP PCDB Test Results

|     | SFP (W/l/s) |      | Efficiency (%) |      |
|-----|-------------|------|----------------|------|
|     | 2009        | 2012 | 2009           | 2012 |
| K+1 |             | 0.63 |                | 96%  |
| K+2 | 0.63        | 0.60 | 96%            | 95%  |
| K+3 | 0.57        | 0.63 | 95%            | 94%  |
| K+4 | 0.57        | 0.71 | 95%            | 94%  |
| K+5 | 0.61        | 0.79 | 94%            | 93%  |
| K+6 | 0.67        | 0.91 | 94%            | 93%  |
| K+7 | 0.75        | 1.06 | 94%            | 93%  |

## SEC Class



Based on average climate with local demand control

## Passive House Certification

|                         | Standard heat exchanger | Enthalpy heat exchanger |
|-------------------------|-------------------------|-------------------------|
| Air flow range          | 70-460m³/hr             | 70-460m³/hr             |
| Heat recovery rate      | nHR=87%                 | nHR=80%                 |
| Specific electric power | Pel,spec=0.24 Wh/m³     | Pel,spec=0.22 Wh/m³     |
| Humidity recovery       |                         | nx = 68%                |



## Article Numbers

| Description                                                                                     | Product Code | 9 digit code |
|-------------------------------------------------------------------------------------------------|--------------|--------------|
| Zehnder ComfoAir Q600                                                                           | 471502023    |              |
| Zehnder ComfoAir Q600 with pre-heater, right handed                                             | 471502024    |              |
| Zehnder ComfoAir Q600 with pre-heater, left handed                                              | 471502025    |              |
| Zehnder ComfoAir Q600 with enthalpy exchanger                                                   | 471502026    |              |
| Zehnder ComfoSense C 67 remote display for Zehnder ComfoAir Q350/450/600, incl. mounting box    | 655010235    |              |
| Zehnder ComfoSwitch C 67 speed controller for Zehnder ComfoAir Q350/450/600, incl. mounting Box | 655010255    |              |
| Zehnder ComfoControl RFZ wireless controller for use with Zehnder ComfoSense 67/C67             | CCRFZ        | 655000755    |
| Zehnder ComfoConnect KNX C for ComfoAir Q350/450/600                                            | 655011120    |              |
| Zehnder ComfoConnect LAN C for ComfoAir Q350/450/600                                            | 655011100    |              |
| Zehnder Option Box with additional connectivity for Zehnder ComfoAir Q350/450/600               | 471502105    |              |
| Zehnder ComfoSplitter for ComfoAir Q350/450/600                                                 | 655010275    |              |
| Zehnder RF-PCB to offer wireless connectivity to the CCRFZ without the use of a ComfoSense C67  | 400502016    |              |
| Support frame for Zehnder ComfoAir Q350/450/600, height 252mm                                   | 471502008    |              |
| Filter for Zehnder ComfoAir Q350/450/600, ISO Coarse >65% (G4), 2 Pieces                        | 400502012    |              |
| Filter for Zehnder ComfoAir Q350/450/600, ISO Coarse >65% (G4), 10 Pieces                       | 400502014    |              |
| Filter for Zehnder ComfoAir Q350/450/600, ISO Coarse >65% (G4), 50 Pieces                       | 400502021    |              |
| Filter for Zehnder ComfoAir Q600, ISO Coarse >65% / ISO ePM1 >55% (G4 / F7), 2 Pieces           | 400502013    |              |
| Filter for Zehnder ComfoAir Q600, ISO ePM1 >55% (F7), 10 Pieces                                 | 400502015    |              |
| Filter for Zehnder ComfoAir Q600, ISO ePM1 >55% (F7), 50 Pieces                                 | 400502022    |              |
| Heat exchanger for Zehnder ComfoAir Q350/450/600                                                | 400502008    |              |
| Enthalpy exchanger for Zehnder ComfoAir Q350/450/600                                            | 400502010    |              |


## Technical Specification

## Dimensions


|                                                               |                                                                                                                      |
|---------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Weight                                                        | 50 Kg                                                                                                                |
| Ducting ø                                                     | Internal - 180 mm                                                                                                    |
|                                                               | External - 200 mm                                                                                                    |
| Condensate connection ø                                       | 32 mm                                                                                                                |
| Filter grade                                                  | Standard - ISO Coarse >65% /<br>ISO Coarse >65% (G4 / G4)<br>Optional - ISO Coarse >65% /<br>ISO ePM1 >55% (G4 / F7) |
| Materials                                                     | Internal EPP / ABS<br>External coated sheet steel                                                                    |
| Supply voltage                                                | 230V / single-phase / 50Hz                                                                                           |
| Maximum power consumption<br>including / excluding pre-heater | 2620W / 350W                                                                                                         |
| Current draw including /<br>excluding pre-heater              | 12.7A / 2.77A                                                                                                        |
| Fuse rating including /<br>excluding pre-heater               | 13 / 3 amp                                                                                                           |
| Specific Fan Power                                            | 0.6 W/l/s                                                                                                            |
| Heat Recovery Efficiency                                      | 96%                                                                                                                  |
| Pre-heater power                                              | 2.4kW                                                                                                                |

|        |        |
|--------|--------|
| Height | 850 mm |
| Width  | 725 mm |
| Depth  | 570 mm |



## Dimensions

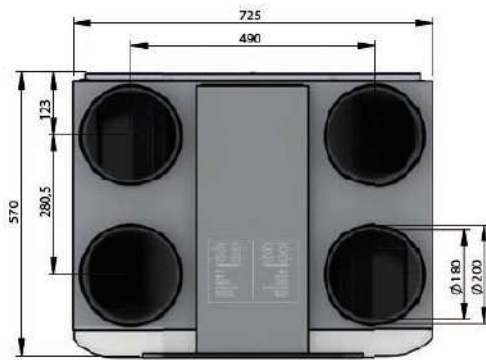


Top view

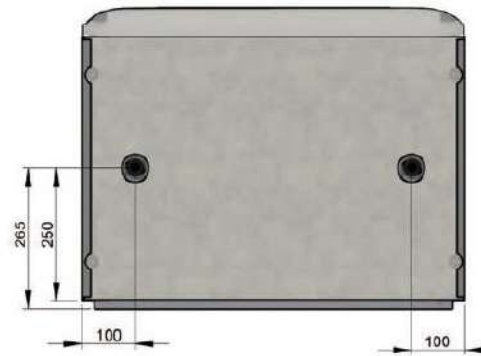

Rear view

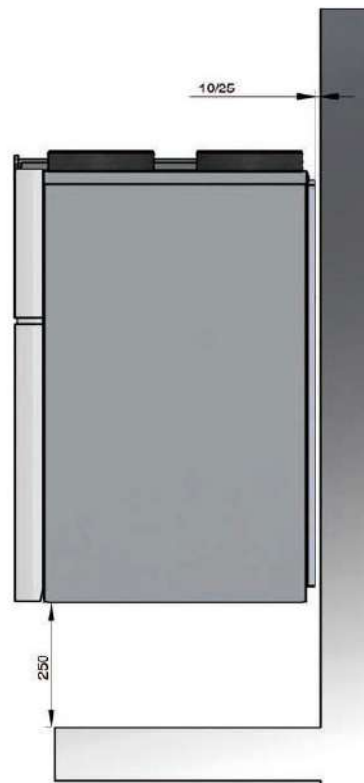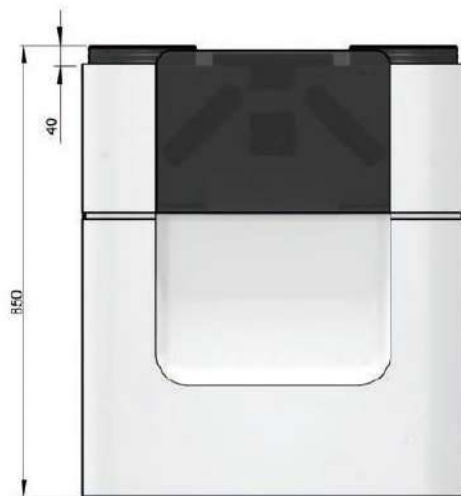

## Pressure Curve

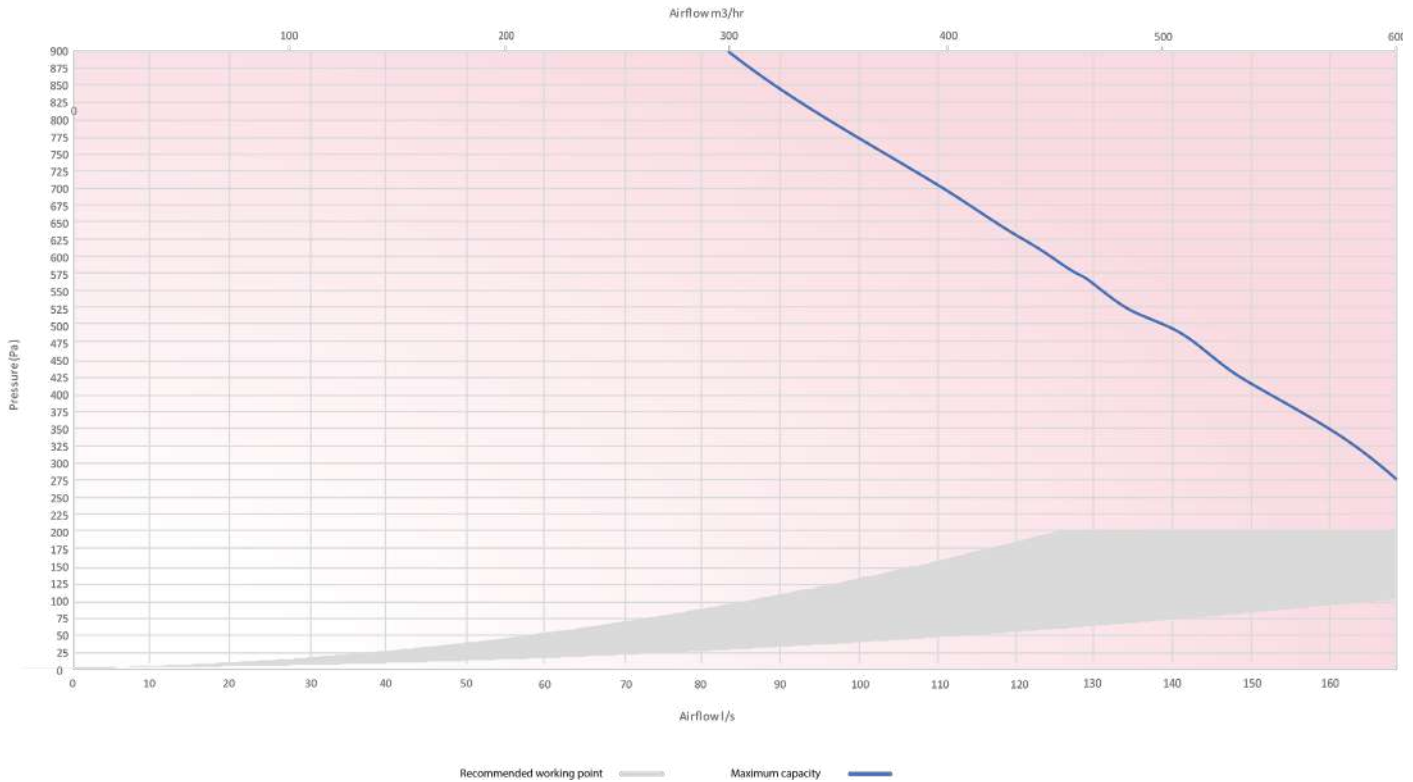


Resistance Guard cap at 400Pa

## Sound Data

| Speed | Test area      | Octave Band (Hz) Sound Power Level, dB |      |      |      |      |      |      | dB(A) @ 3m |
|-------|----------------|----------------------------------------|------|------|------|------|------|------|------------|
|       |                | 125                                    | 250  | 500  | 1000 | 2000 | 4000 | 8000 |            |
| 20%   | Casing         | 43.3                                   | 42.9 | 34.2 | 30.3 | 24.2 | 15.6 | 12.1 | 20.2       |
|       | Supply/Exhaust | 52.8                                   | 51.9 | 42.9 | 39.2 | 35.2 | 25.6 | 12.9 |            |
|       | Extract/Intake | 45.7                                   | 43.5 | 31.3 | 26.1 | 21.5 | 14.1 | 16.3 |            |
| 40%   | Casing         | 47.4                                   | 48.2 | 41.8 | 36.7 | 32.3 | 26.0 | 21.0 | 26.5       |
|       | Supply/Exhaust | 58.3                                   | 59.2 | 51.9 | 46.9 | 44.1 | 37.0 | 26.4 |            |
|       | Extract/Intake | 51.8                                   | 49.6 | 39.7 | 32.4 | 28.2 | 22.1 | 19.8 |            |
| 60%   | Casing         | 52.3                                   | 54.6 | 50.8 | 44.2 | 38.5 | 38.5 | 31.8 | 34.5       |
|       | Supply/Exhaust | 64.9                                   | 67.9 | 62.6 | 56.2 | 50.7 | 50.7 | 42.7 |            |
|       | Extract/Intake | 59.0                                   | 56.9 | 49.9 | 39.9 | 31.7 | 31.7 | 24.0 |            |
| 80%   | Casing         | 56.8                                   | 60.4 | 59.1 | 51.1 | 49.8 | 49.8 | 41.5 | 42.4       |
|       | Supply/Exhaust | 70.9                                   | 75.8 | 72.4 | 64.6 | 63.2 | 63.2 | 57.4 |            |
|       | Extract/Intake | 65.6                                   | 63.5 | 59.2 | 46.7 | 40.4 | 40.4 | 27.8 |            |
| 100%  | Casing         | 57.9                                   | 61.8 | 61.1 | 52.8 | 52.5 | 52.5 | 43.9 | 44.4       |
|       | Supply/Exhaust | 72.4                                   | 77.7 | 74.7 | 66.6 | 66.2 | 66.2 | 61.0 |            |
|       | Extract/Intake | 67.3                                   | 65.1 | 61.4 | 48.3 | 42.5 | 42.5 | 28.8 |            |

Casing tested according to ISO 3741:2010. Supply and Extract tested according to ISO 5135:1997 showing induct sound power level corrected for end duct reflection according to EN13053:2006. Casing dB(A) @ 3m given as hemispherical.


## Air Direction/Connection

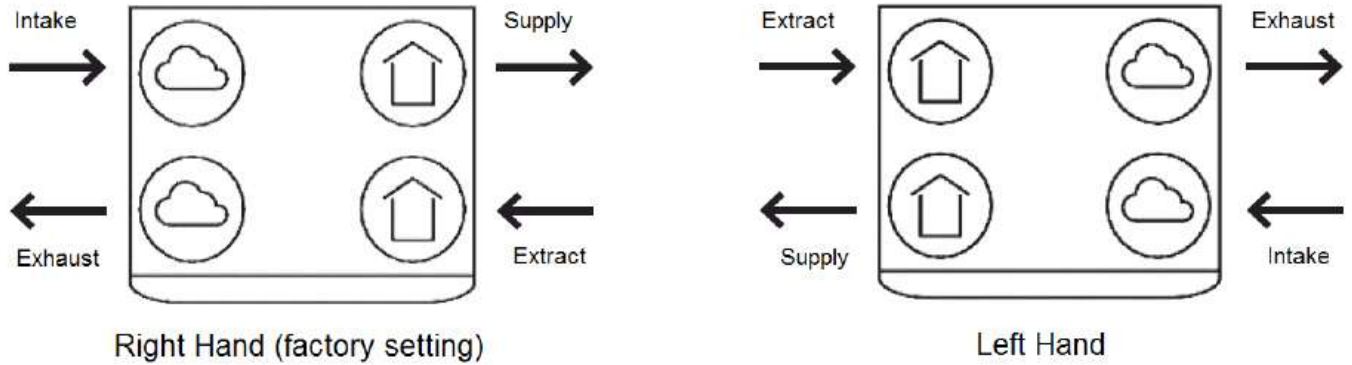

## Wiring

Electrical connections should be carried out in accordance to IEE regulations by a qualified electrician. The unit is supplied with a flying lead for connection to the mains supply.

### CAQ ancillary wiring

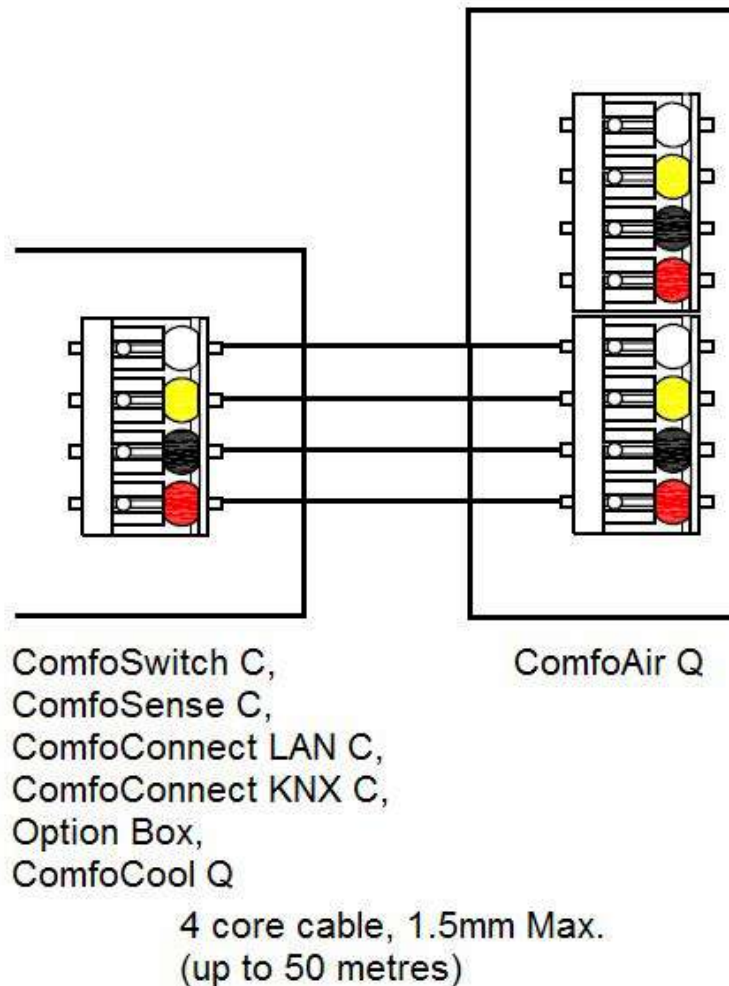

## For use with

Our range of ComfoAir MVHR units can be used in conjunction with ComfoWell. The Zehnder ComfoWell is a modular system consisting of attenuators, fine grade filters and active carbon filters all integrated for use with a rigid or semi-rigid ductwork approach.



**TO VIEW OUR COMFOWELL  
INFORMATION**

**CLICK HERE**

## BIM/CAD Components

If you would like to download the BIM / CAD files for this or any other of our products then please visit our BIM library.

**TO VISIT OUR BIM/CAD LIBRARY**

**CLICK HERE**

## Installation Instructions

If you would like to download the installation files for this or any other of our products then please visit our download page by clicking the link below.

**TO VISIT OUR DOWNLOAD PAGE**

**CLICK HERE**

## Controls

### ComfoSense C 67



The Zehnder ComfoSense C 67 is a four position switch designed to enable the user to manually select the desired ventilation systems flow rate and provide system notifications.

#### Key Benefits

- 4 separate ventilation flow rate options to select in 1 controller
- 7 day flow rate programmer
- Summer bypass indicator
- Frost protection indicator
- Service and Maintenance alert
- Clock function
- User menu access
- RF bridge to enable use of the CCRFZ controller

#### Technical Specification

|                   |                                                           |
|-------------------|-----------------------------------------------------------|
| Mounting options  | Recessed / Surface                                        |
| Supply voltage    | Low voltage direct from the MVHR units ComfoNET connector |
| IP rating         | IP44                                                      |
| Recommended cable | 4 core cable, 1mm Max. (up to 50 metres)                  |
| RAL colour        | 9016                                                      |

#### Dimensions (recessed)

|        |      |
|--------|------|
| Height | 80mm |
| Width  | 80mm |
| Depth  | 12mm |

#### Dimensions (surface mounted)

|        |        |
|--------|--------|
| Height | 80mm   |
| Width  | 80mm   |
| Depth  | 48.5mm |

#### Description

Suitable for use with MVHR units:

#### Product Code

#### Article

655010235

|                                                     |           |
|-----------------------------------------------------|-----------|
| Zehnder ComfoAir Q350                               | 471502015 |
| Zehnder ComfoAir Q350 with pre-heater, right handed | 471502016 |
| Zehnder ComfoAir Q350 with pre-heater, left handed  | 471502017 |
| Zehnder ComfoAir Q350 with enthalpy exchanger       | 471502018 |
| Zehnder ComfoAir Q450                               | 471502019 |
| Zehnder ComfoAir Q450 with pre-heater, right handed | 471502020 |
| Zehnder ComfoAir Q450 with pre-heater, left handed  | 471502021 |
| Zehnder ComfoAir Q450 with enthalpy exchanger       | 471502022 |
| Zehnder ComfoAir Q600                               | 471502023 |
| Zehnder ComfoAir Q600 with pre-heater, right handed | 471502024 |
| Zehnder ComfoAir Q600 with pre-heater, left handed  | 471502025 |
| Zehnder ComfoAir Q600 with enthalpy exchanger       | 471502026 |

## ComfoSwitch C 67



The Zehnder ComfoSwitch C 67 is a four position switch designed to enable the user to manually select the desired ventilation systems flow rate and provide system notifications.

### Key Benefits

- 4 separate ventilation flow rate options to select in 1 controller
- Temporary high speed activation setting
- Service and Maintenance alert

### Technical Specification

|                   |                                                           |
|-------------------|-----------------------------------------------------------|
| Mounting options  | Recessed / Surface                                        |
| Supply voltage    | Low voltage direct from the MVHR units ComfoNET connector |
| IP rating         | IP44                                                      |
| Recommended cable | 4 core cable, 1mm Max. (up to 50 metres)                  |
| RAL colour        | 9016                                                      |

### Dimensions (recessed)

|        |      |
|--------|------|
| Height | 80mm |
| Width  | 80mm |
| Depth  | 12mm |

### Dimensions (surface mounted)

|        |        |
|--------|--------|
| Height | 80mm   |
| Width  | 80mm   |
| Depth  | 48.5mm |

### Description

Suitable for use with MVHR units:

### Product Code

### Article

655010255

|                                                     |           |
|-----------------------------------------------------|-----------|
| Zehnder ComfoAir Q350                               | 471502015 |
| Zehnder ComfoAir Q350 with pre-heater, right handed | 471502016 |
| Zehnder ComfoAir Q350 with pre-heater, left handed  | 471502017 |
| Zehnder ComfoAir Q350 with enthalpy exchanger       | 471502018 |
| Zehnder ComfoAir Q450                               | 471502019 |
| Zehnder ComfoAir Q450 with pre-heater, right handed | 471502020 |
| Zehnder ComfoAir Q450 with pre-heater, left handed  | 471502021 |
| Zehnder ComfoAir Q450 with enthalpy exchanger       | 471502022 |
| Zehnder ComfoAir Q600                               | 471502023 |
| Zehnder ComfoAir Q600 with pre-heater, right handed | 471502024 |
| Zehnder ComfoAir Q600 with pre-heater, left handed  | 471502025 |
| Zehnder ComfoAir Q600 with enthalpy exchanger       | 471502026 |

## ComfoControl RFZ



The Zehnder CCRFZ is a three position switch designed to enable the user to manually select the desired ventilation systems flow rate and provide system notifications. This controller can only be used in conjunction with the ComfoSense 67, ComfoSense C67 or with the RF-PCB.

### Key Benefits

- Wireless controller
- 3 separate ventilation flow rate options to select in 1 controller
- 2 temporary high speed activation settings
- Service and Maintenance alert

### Technical Specification

|                  |                                                       |
|------------------|-------------------------------------------------------|
| Mounting options | Surface                                               |
| Supply voltage   | Powered by a coincell lithium battery (type: CR 2032) |
| IP rating        | IP40                                                  |
| RAL colour       | 9010                                                  |

### Dimensions (surface mounted)

|        |      |
|--------|------|
| Height | 80mm |
| Width  | 80mm |
| Depth  | 14mm |

### Description

Suitable for use with MVHR units:

### Product Code

### Article

CCRFZ

|                                                         |           |
|---------------------------------------------------------|-----------|
| Zehnder ComfoAir 160 Luxe                               | 471218960 |
| Zehnder ComfoAir 160 Luxe with pre-heater               | 471218915 |
| Zehnder ComfoAir 180 Luxe                               | 471212380 |
| Zehnder ComfoAir 180 Luxe with pre-heater               | 471212385 |
| Zehnder ComfoAir 200 Luxe, left handed                  | 471226210 |
| Zehnder ComfoAir 200 Luxe, right handed                 | 471226215 |
| Zehnder ComfoAir 200 Luxe with pre-heater, left handed  | 471226310 |
| Zehnder ComfoAir 200 Luxe with pre-heater, right handed | 471226315 |
| Zehnder ComfoAir Q350                                   | 471502015 |
| Zehnder ComfoAir Q350 with pre-heater, right handed     | 471502016 |
| Zehnder ComfoAir Q350 with pre-heater, left handed      | 471502017 |
| Zehnder ComfoAir Q350 with enthalpy exchanger           | 471502018 |
| Zehnder ComfoAir Q450                                   | 471502019 |
| Zehnder ComfoAir Q450 with pre-heater, right handed     | 471502020 |
| Zehnder ComfoAir Q450 with pre-heater, left handed      | 471502021 |
| Zehnder ComfoAir Q450 with enthalpy exchanger           | 471502022 |
| Zehnder ComfoAir Q600                                   | 471502023 |
| Zehnder ComfoAir Q600 with pre-heater, right handed     | 471502024 |
| Zehnder ComfoAir Q600 with pre-heater, left handed      | 471502025 |
| Zehnder ComfoAir Q600 with enthalpy exchanger           | 471502026 |

## ComfoConnect KNX C

The Zehnder ComfoConnect KNX C enables the connection between the ventilation system and the KNX building management system.



### Key Benefits

- Control and monitor the ventilation system via the KNX building management system
- Control ventilation flow rate, temperature profile, temporary high speed setting and external sensor set points
- Monitor ventilation flow rates, temperatures and external sensors
- 7 day flow rate programmer
- Service and Maintenance alert
- ETS5 compatible

### Technical Specification

|                                  |                                                           |            |
|----------------------------------|-----------------------------------------------------------|------------|
| Supply voltage                   | Low voltage direct from the MVHR units ComfoNET connector |            |
| IP rating                        | IP30                                                      |            |
| Recommended cable                | 4 core cable, 1mm Max. (up to 50 metres)                  |            |
| RAL colour                       | Front: 9003                                               | Back: 7024 |
| Device model                     | System B                                                  |            |
| Supported configuration mode     | S-Mode                                                    |            |
| Supported ETS version            | 5                                                         |            |
| Zehnder KNX library available at | <a href="http://www.zehnder.co.uk">www.zehnder.co.uk</a>  |            |

### Dimensions (surface mounted)

|        |       |
|--------|-------|
| Height | 120mm |
| Width  | 76mm  |
| Depth  | 25mm  |

### Description

Suitable for use with MVHR units:

### Product Code

### Article

655011120

|                                                     |           |
|-----------------------------------------------------|-----------|
| Zehnder ComfoAir Q350                               | 471502015 |
| Zehnder ComfoAir Q350 with pre-heater, right handed | 471502016 |
| Zehnder ComfoAir Q350 with pre-heater, left handed  | 471502017 |
| Zehnder ComfoAir Q350 with enthalpy exchanger       | 471502018 |
| Zehnder ComfoAir Q450                               | 471502019 |
| Zehnder ComfoAir Q450 with pre-heater, right handed | 471502020 |
| Zehnder ComfoAir Q450 with pre-heater, left handed  | 471502021 |
| Zehnder ComfoAir Q450 with enthalpy exchanger       | 471502022 |
| Zehnder ComfoAir Q600                               | 471502023 |
| Zehnder ComfoAir Q600 with pre-heater, right handed | 471502024 |
| Zehnder ComfoAir Q600 with pre-heater, left handed  | 471502025 |
| Zehnder ComfoAir Q600 with enthalpy exchanger       | 471502026 |

## ComfoConnect LAN C



Zehnder ComfoControl  
App

The Zehnder ComfoConnect LAN C enables the connection between the ventilation system and the ComfoControl app for iPhone and Android devices.

### Key Benefits

- Control and monitor the ventilation system via the ComfoControl app
- Control ventilation flow rate, temperature profile, temporary high speed setting and external sensor set points
- Monitor ventilation flow rates, temperatures and external sensors
- 7 day flow rate programmer
- Access the ventilation system remotely from anywhere in the world
- Service and Maintenance alert direct to your phone
- User menu access
- Installer menu access

### Technical Specification

|                   |                                                           |            |
|-------------------|-----------------------------------------------------------|------------|
| Supply voltage    | Low voltage direct from the MVHR units ComfoNET connector |            |
| IP rating         | IP30                                                      |            |
| Recommended cable | 4 core cable, 1mm Max. (up to 50 metres)                  |            |
| RAL colour        | Front: 9003                                               | Back: 7024 |

### Dimensions (surface mounted)

|        |       |
|--------|-------|
| Height | 120mm |
| Width  | 76mm  |
| Depth  | 25mm  |

### Description

Suitable for use with MVHR units:

### Product Code

### Article

655011100

|                                                     |           |
|-----------------------------------------------------|-----------|
| Zehnder ComfoAir Q350                               | 471502015 |
| Zehnder ComfoAir Q350 with pre-heater, right handed | 471502016 |
| Zehnder ComfoAir Q350 with pre-heater, left handed  | 471502017 |
| Zehnder ComfoAir Q350 with enthalpy exchanger       | 471502018 |
| Zehnder ComfoAir Q450                               | 471502019 |
| Zehnder ComfoAir Q450 with pre-heater, right handed | 471502020 |
| Zehnder ComfoAir Q450 with pre-heater, left handed  | 471502021 |
| Zehnder ComfoAir Q450 with enthalpy exchanger       | 471502022 |
| Zehnder ComfoAir Q600                               | 471502023 |
| Zehnder ComfoAir Q600 with pre-heater, right handed | 471502024 |
| Zehnder ComfoAir Q600 with pre-heater, left handed  | 471502025 |
| Zehnder ComfoAir Q600 with enthalpy exchanger       | 471502026 |

## Option Box

The Zehnder Option Box enables the connection between the ventilation system and various other external components.



### Key Benefits

- 4 x 0-10V inputs for use with the 12V 0-10V RH sensor or 12V 0-10V CO2 sensor
- Volt free contact input
- Post heater integration
- ComfoFond-L Q or sub-soil heat exchanger valve integration
- External filter alert integration
- Service mode activation input to disable fans e.g. when fire alarm activated

### Technical Specification



|                   |                                                                                                       |
|-------------------|-------------------------------------------------------------------------------------------------------|
| Supply voltage    | Low voltage direct from the MVHR units ComfoNET connector<br>Mains power - 230V / single-phase / 50Hz |
| IP rating         | IP40                                                                                                  |
| Recommended cable | 4 core cable, 1mm Max. (up to 50 metres)                                                              |
| RAL colour        | 9018                                                                                                  |

### Dimensions (surface mounted)

|        |       |
|--------|-------|
| Height | 253mm |
| Width  | 178mm |
| Depth  | 60mm  |

### Wiring

#### The Bathroom Switch connection option - II

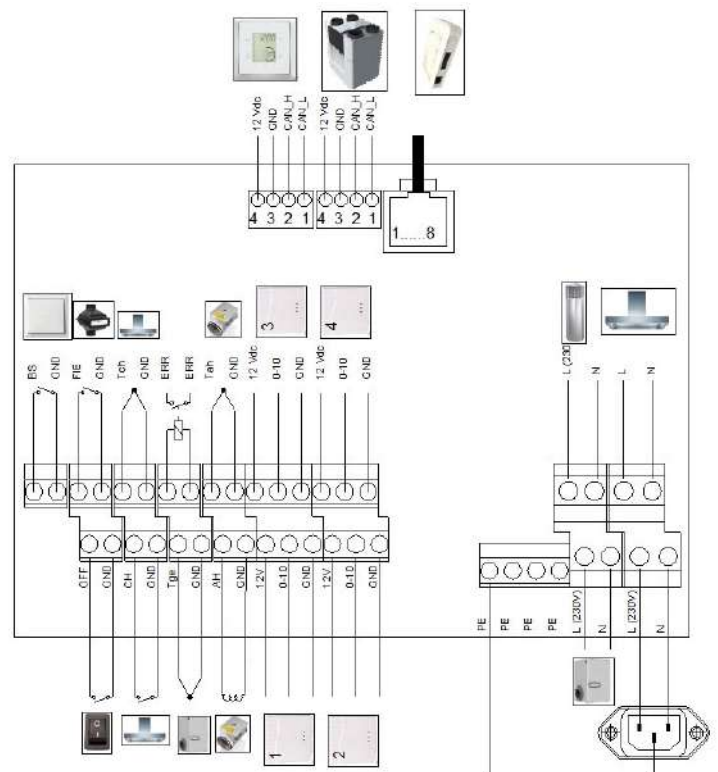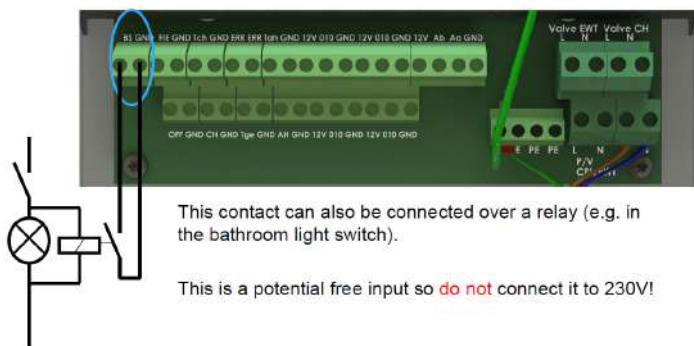

### Description

Suitable for use with MVHR units:

### Product Code

### Article

471502105

|                                                     |           |
|-----------------------------------------------------|-----------|
| Zehnder ComfoAir Q350                               | 471502015 |
| Zehnder ComfoAir Q350 with pre-heater, right handed | 471502016 |
| Zehnder ComfoAir Q350 with pre-heater, left handed  | 471502017 |
| Zehnder ComfoAir Q350 with enthalpy exchanger       | 471502018 |
| Zehnder ComfoAir Q450                               | 471502019 |
| Zehnder ComfoAir Q450 with pre-heater, right handed | 471502020 |
| Zehnder ComfoAir Q450 with pre-heater, left handed  | 471502021 |
| Zehnder ComfoAir Q450 with enthalpy exchanger       | 471502022 |
| Zehnder ComfoAir Q600                               | 471502023 |
| Zehnder ComfoAir Q600 with pre-heater, right handed | 471502024 |
| Zehnder ComfoAir Q600 with pre-heater, left handed  | 471502025 |
| Zehnder ComfoAir Q600 with enthalpy exchanger       | 471502026 |

# ComfoSplitter



The Zehnder ComfoSplitter enables 5 additional ComfoNet connectivity options to the ventilation system.

### Key Benefits

- 2 additional ComfoNet connectivity options when unpowered
- 5 additional ComfoNet connectivity options when powered

### Technical Specification

|                   |                                                                                                       |
|-------------------|-------------------------------------------------------------------------------------------------------|
| Supply voltage    | Low voltage direct from the MVHR units ComfoNET connector<br>Mains power - 230V / single-phase / 50Hz |
| IP rating         | IP22                                                                                                  |
| Recommended cable | 4 core cable, 1mm Max. (up to 50 metres)                                                              |
| RAL colour        | 9018                                                                                                  |

### Dimensions (surface mounted)

|        |       |
|--------|-------|
| Height | 108mm |
| Width  | 53mm  |
| Depth  | 23mm  |

### Description

Suitable for use with MVHR units:


### Product Code

### Article

655010275

|                                                     |           |
|-----------------------------------------------------|-----------|
| Zehnder ComfoAir Q350                               | 471502015 |
| Zehnder ComfoAir Q350 with pre-heater, right handed | 471502016 |
| Zehnder ComfoAir Q350 with pre-heater, left handed  | 471502017 |
| Zehnder ComfoAir Q350 with enthalpy exchanger       | 471502018 |
| Zehnder ComfoAir Q450                               | 471502019 |
| Zehnder ComfoAir Q450 with pre-heater, right handed | 471502020 |
| Zehnder ComfoAir Q450 with pre-heater, left handed  | 471502021 |
| Zehnder ComfoAir Q450 with enthalpy exchanger       | 471502022 |
| Zehnder ComfoAir Q600                               | 471502023 |
| Zehnder ComfoAir Q600 with pre-heater, right handed | 471502024 |
| Zehnder ComfoAir Q600 with pre-heater, left handed  | 471502025 |
| Zehnder ComfoAir Q600 with enthalpy exchanger       | 471502026 |

# RF-PCB



The Zehnder RF-PCB enables the CCRFZ to be used with the ventilation system without the need for the ComfoSense C67.

## Key Benefits

- Acts as a wireless reciver to the CCRFZ without the need for the ComfoSense C67
- Built into the unit and not visible from the outside

## Technical Specification

Mounting options                      Inside the unit direct to the PCB

| Description                                         | Product Code | Article   |
|-----------------------------------------------------|--------------|-----------|
| For use with MVHR                                   |              | 400502016 |
| Zehnder ComfoAir Q350                               | 471502015    |           |
| Zehnder ComfoAir Q350 with pre-heater, right handed | 471502016    |           |
| Zehnder ComfoAir Q350 with pre-heater, left handed  | 471502017    |           |
| Zehnder ComfoAir Q350 with enthalpy exchanger       | 471502018    |           |
| Zehnder ComfoAir Q450                               | 471502019    |           |
| Zehnder ComfoAir Q450 with pre-heater, right handed | 471502020    |           |
| Zehnder ComfoAir Q450 with pre-heater, left handed  | 471502021    |           |
| Zehnder ComfoAir Q450 with enthalpy exchanger       | 471502022    |           |
| Zehnder ComfoAir Q600                               | 471502023    |           |
| Zehnder ComfoAir Q600 with pre-heater, right handed | 471502024    |           |
| Zehnder ComfoAir Q600 with pre-heater, left handed  | 471502025    |           |
| Zehnder ComfoAir Q600 with enthalpy exchanger       | 471502026    |           |

## Consultant Specification

### Specification

The unit shall consist of a body manufactured in powder coated sheet steel. The unit shall be fully insulated using high quality EPP to maintain excellent thermal characteristics and prevent shrinkage over time. It shall have DC motors with sealed for life bearings. The fans impellers should be low pressure centrifugal type with backward curved blades within ABS scroll housing and flow ring to provide accurate pressure measurement and incorporate a flow grid to optimise the airflow into the fan. The heat exchanger shall be a diamond shaped multi-plate, counter flow design constructed from Polystyrene with laser welded joints and shall retain up to 96% of the temperature differential of outgoing air with the option to upgrade to an enthalpy heat exchanger for latent and sensible heat transfer plus moisture recovery negating the need for a condensate drain.

The unit shall contain filters manufactured from recyclable material which has been tested to a minimum of ISO Coarse >65% (G4) standard with the option to upgrade to ISO ePM1 >55% (F7). The filters shall be pleated to reduce the pressure drop and required cleaning time. The unit shall have 180mm duct connections, and be suitable for vertical wall mounting or floor stand with the ability to allow left or right hand configuration through the unit's software alone – no mechanical reconfiguration shall be required. Integrated modulating preheater options shall be available to regulate its output to enable balanced ventilation with external air temperatures -10°C.

The unit shall have a 100% full summer bypass using an in-line modulating mechanism to provide filtered supply air 365 days of the year, even under bypass conditions. It shall provide fresh filtered air to aid night time cooling and prevent condensation within the supply pipework, regardless of the external air temperature. The unit shall contain a temperature sensor for each air stream to ensure correct and logical operation of the bypass damper by evaluating differential as well as absolute temperature to maximise the opportunity for free cooling. The unit shall control air flow to react to prolonged, sustained increased pressure drops to best achieve the commissioned flow rate even when filter degradation occurs. Airflow should not react to short term 'wind gusts' to avoid nuisance running.

The unit shall be constructed to have a removable cover to allow full maintenance access. The removable cover shall enable access to the supply/extract fan, heat exchanger and access to electrical connections. The motors shall be suitable for removal without the requirement for the unit to be removed from situ and be available as spare parts for a minimum of 10 years even after ceasing manufacture of the unit.

The unit shall conform to LVD and EMC standards and be CE Marked in addition to having an EU compliant energy rating label (SEC) with a minimum grade of A. The unit shall be manufactured by Zehnder.

### Operation

The supply and extract unit shall be a ComfoAir Q manufactured by Zehnder and shall be suitable to mount on a floor stand, wall or in a cupboard in accordance with the specification.

The fresh filtered air from outside shall be supplied to each of the habitable rooms and pre-heated by the warm extract air from the wet areas, such as kitchen or bathroom, via the plastic counter flow heat exchanger. The unit shall vary its speed of the EC motors automatically when it receives a signal from one of the inbuilt sensors or via external switches.

The unit shall have the ability to adjust and commission the supply and extract motors independently via the front mounted in-built LCD interface. The motors shall both automatically adjust independently to the system pressure to achieve the input flow rate.

## Consultant Specification

### Controls

All ComfoAir Q units shall contain the following functions within the unit pre-wired and factory fitted by the manufacturer:

- Dial-a-duty motor control
- 4 Variable speed flow rate set points
- Automatic filtered modulating summer bypass with timed manual override option
- Heat exchanger frost protection
- Commissioning wizard to enable commissioning of the unit
- Integral service, fault and operation indicators
- Control panel PIN protection
- Tool free filter access
- Humidity sensors to operate the unit in response to humidity spikes above natural background humidity levels as opposed to a single threshold humidity point to activate the high set point
- Automatic passive boost for night time cooling
- Variable overrun timer relative to high speed activation period

All ComfoAir Q units shall contain the following options when combined with relevant ancillaries:

- BMS compatibility via KNX protocol option (ComfoConnect KNX C)
- Wi-Fi connectivity option (ComfoConnect LAN C)
- RFZ wireless connectivity option (RF-PCB or ComfoSense C 67)
- Switched live input option (Option Box)
- Volt free contact option (Option Box)
- 0-10V input option (Option Box)
- Pre-heater frost protection option
- Post-heater control option (Option Box)
- Control input for single or multiple capacitive touch speed controllers with 7 day programmer capabilities (ComfoSense C 67)
- Control input for single or multiple 4 speed manual/auto controller with filter alert (ComfoSwitch C 67)