

KR 560




Designed for the delivery of contaminated air.

SKR 560 – sound-insulated




Lowest noise levels for inlet side and case radiation with high performance density. Use in extract air and intake air systems with specific noise level requirements.

Dimensions KR 560

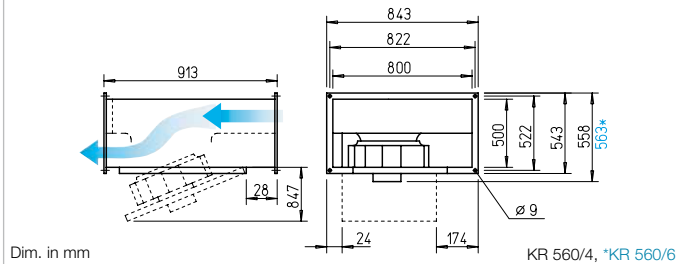

Dimensions SKR 560 – sound-insulated

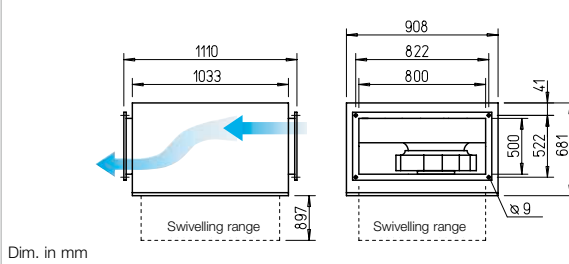

Features KR and SKR

- High-pressure and high-volume centrifugal fan with high efficiency.
- Particularly easy to service (cleaning) due to retractable motor-impeller unit.
- Easily accessible for cleaning and thus designed for the delivery of contaminated air.
- Linear throughflow.
- Compact design, convenient installation.

Special features SKR

- Lowest noise levels for inlet side and case radiation with high performance density.

Description

- **Casing KR**
Made of galvanised steel sheet. Double-sided rectangular duct flange profiles (20 mm) for installation in rectangular duct system.
- **Casing SKR**
Like above, but with additional sound insulation cladding made of 50 mm thick mineral fibre boards. With a sound absorbing lining on the inside.

Common features KR and SKR

- **Impeller**
Centrifugal, with backward curved blades made of plastic. Aerodynamically optimised, inlet via nozzle.

■ Drive

Through maintenance-free external rotor motor on which the impeller is mounted. Closed design, protection category IP54. Winding with moisture proof coating. Ball bearing mounted, radio interference-free. Motor and impeller dynamically balanced.

■ Motor protection

Through built-in thermal contacts via triggering device (Accessories).

■ Power control

Through voltage reduction using 5-step transformer or electronically (continuously variable). The performances at corresponding voltages are shown in the performance diagram.

■ Electrical connection

Terminal box (IP54) mounted to external cable.

■ Installation

Installation possible in any position. Note accessibility/swivelling range.

■ Noise

The total level and range are specified above the performance diagram for:

- ☐ Case-radiated sound power
 - ☐ Inlet side sound power
 - ☐ Outlet side sound power
- The inlet side sound power level is also specified above the control voltages in the performance diagram.
- ☐ The case-radiated noise as sound pressure at 4 m (free field conditions) is also specified in the type table.

Type	Ref. no.	Flow rate Free blowing V m³/h	Rated speed min⁻¹	Sound press. case-radiation dB(A) in 4 m	Power consumption		Wiring diagram	Max. air flow temp. at		Wgt net aprx.	Speed controller 5-step with motor protection circuit breaker		Motor protection circuit breaker for connection of built-in thermal contacts	
					kW	A	No.	+ °C	+ °C	kg	Type	Ref. no.	Type	Ref. no.
Three-phase current motor, 230/400 V, 50 Hz, protection category IP54														
KRD 560/6/80/50	08842	7460	880	41	0.64	2.50/1.40	860	60	60	61.9	RDS 2	01315	MD	05849
KRD 560/4/80/50	06147	11970	1350	55	2.33	7.80/4.50	860	45	45	64.1	RDS 7	01578	MD	05849
Sound-insulated SKR – Three-phase current motor, 230/400 V, 50 Hz, protection category IP54														
SKRD 560/6/80/50	08199	7600	880	36	0.66	2.50/1.50	860	60	60	86.9	RDS 2	01315	MD	05849